



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

### Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

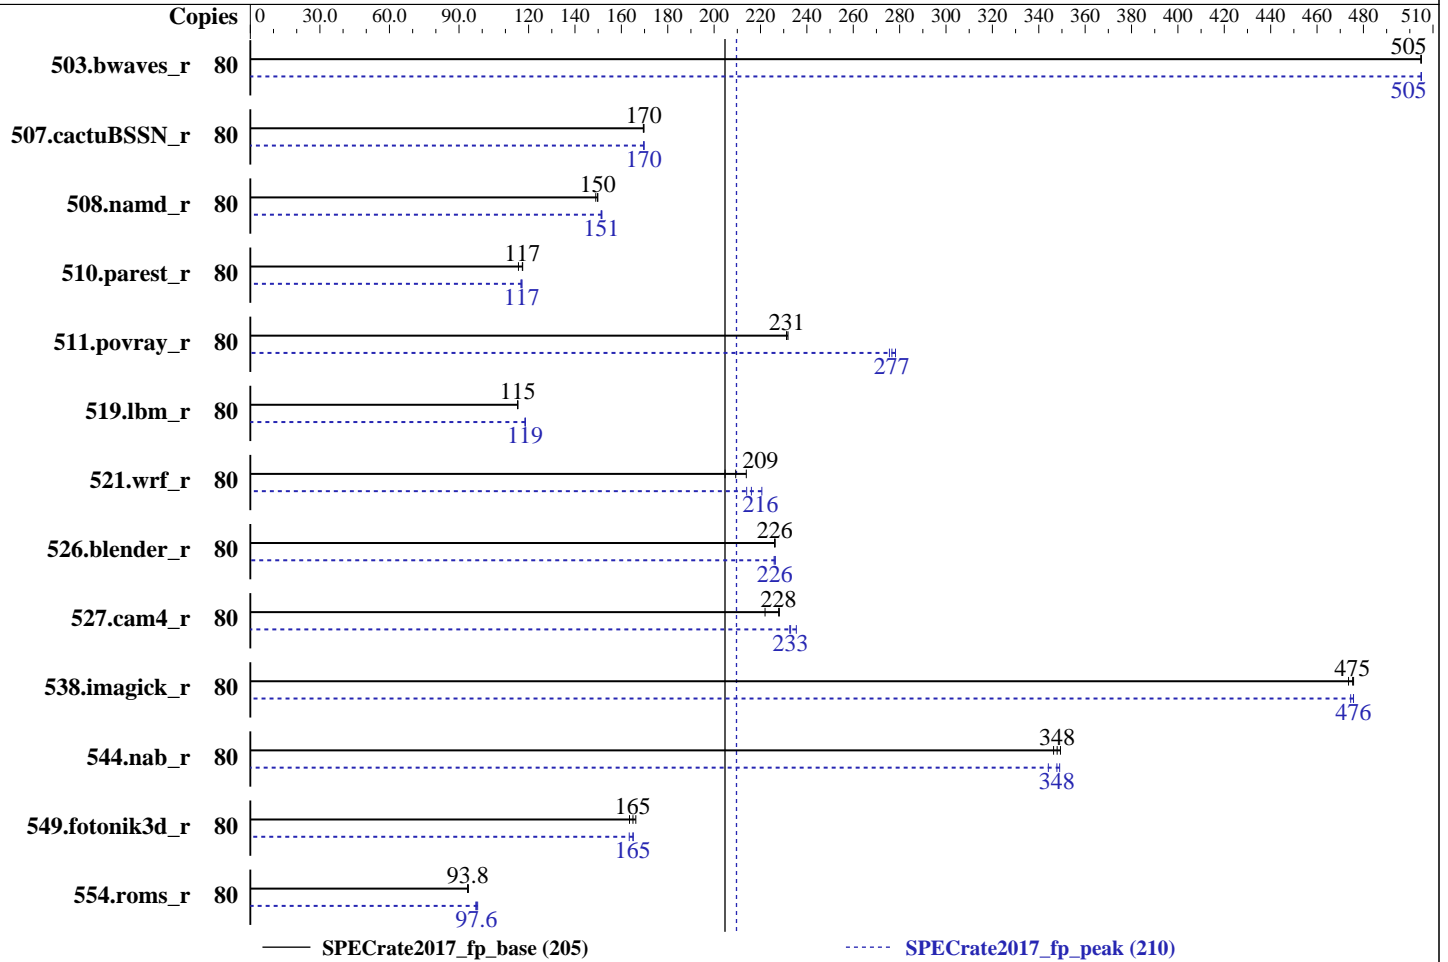

### Hardware

CPU Name: Intel Xeon Gold 6230  
 Max MHz.: 3900  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64) 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 6.36 Released Feb-2019  
 File System: btrfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

## Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1589	505	<b><u>1589</u></b>	<b><u>505</u></b>	1589	505	80	<b><u>1589</u></b>	<b><u>505</u></b>	1589	505	1589	505
507.cactuBSSN_r	80	598	169	<b><u>597</u></b>	<b><u>170</u></b>	597	170	80	<b><u>597</u></b>	<b><u>170</u></b>	597	170	597	170
508.namd_r	80	507	150	510	149	<b><u>507</u></b>	<b><u>150</u></b>	80	502	151	<b><u>502</u></b>	<b><u>151</u></b>	501	152
510.parest_r	80	1782	117	1810	116	<b><u>1784</u></b>	<b><u>117</u></b>	80	<b><u>1788</u></b>	<b><u>117</u></b>	1787	117	1793	117
511.povray_r	80	808	231	806	232	<b><u>807</u></b>	<b><u>231</u></b>	80	671	278	678	276	<b><u>675</u></b>	<b><u>277</u></b>
519.lbm_r	80	731	115	732	115	<b><u>731</u></b>	<b><u>115</u></b>	80	712	118	711	119	<b><u>711</u></b>	<b><u>119</u></b>
521.wrf_r	80	875	205	<b><u>856</u></b>	<b><u>209</u></b>	838	214	80	<b><u>829</u></b>	<b><u>216</u></b>	812	221	837	214
526.blender_r	80	<b><u>539</u></b>	<b><u>226</u></b>	539	226	538	226	80	538	226	539	226	<b><u>539</u></b>	<b><u>226</u></b>
527.cam4_r	80	630	222	<b><u>614</u></b>	<b><u>228</u></b>	613	228	80	594	235	<b><u>601</u></b>	<b><u>233</u></b>	602	233
538.imagick_r	80	<b><u>419</u></b>	<b><u>475</u></b>	420	474	418	476	80	418	476	<b><u>418</u></b>	<b><u>476</u></b>	419	474
544.nab_r	80	389	346	<b><u>387</u></b>	<b><u>348</u></b>	385	349	80	386	349	391	344	<b><u>387</u></b>	<b><u>348</u></b>
549.fotonik3d_r	80	<b><u>1889</u></b>	<b><u>165</u></b>	1875	166	1907	164	80	<b><u>1890</u></b>	<b><u>165</u></b>	1888	165	1908	163
554.roms_r	80	1357	93.7	<b><u>1356</u></b>	<b><u>93.8</u></b>	1352	94.0	80	1307	97.2	1297	98.0	<b><u>1303</u></b>	<b><u>97.6</u></b>

SPECrate2017\_fp\_base = 205

SPECrate2017\_fp\_peak = 210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/lib/ia32:/spec/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

## Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Power Policy Set to Performance  
SNC Set to Enabled  
IMC Interleaving Set to 1-way Interleave  
XPT Prefetch Set to Enabled  
Sysinfo program /spec/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-qzen Fri Mar 1 08:17:55 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz  
2 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 80  
On-line CPU(s) list: 0-79  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz  
Stepping: 6

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

## Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### Platform Notes (Continued)

```

CPU MHz:                2100.000
CPU max MHz:            3900.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               28160K
NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsave
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 95185 MB
node 0 free: 78397 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 96743 MB
node 1 free: 87775 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 96714 MB
node 2 free: 87708 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 96531 MB
node 3 free: 87532 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

## Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### Platform Notes (Continued)

```
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      394419720 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-qzen 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Feb 28 22:47
```

```
SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda6       btrfs    471G   63G  408G  14% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 6.36 02/15/2019
Memory:
24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933
```

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 519.lbm\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes (Continued)

Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 507.cactuBSSN\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 554.roms\_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes (Continued)

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 205

Huawei 2288H V5 (Intel Xeon Gold 6230)

SPECrate2017\_fp\_peak = 210

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2019-02-28 19:17:54-0500.

Report generated on 2019-04-30 17:36:33 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-30.