



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

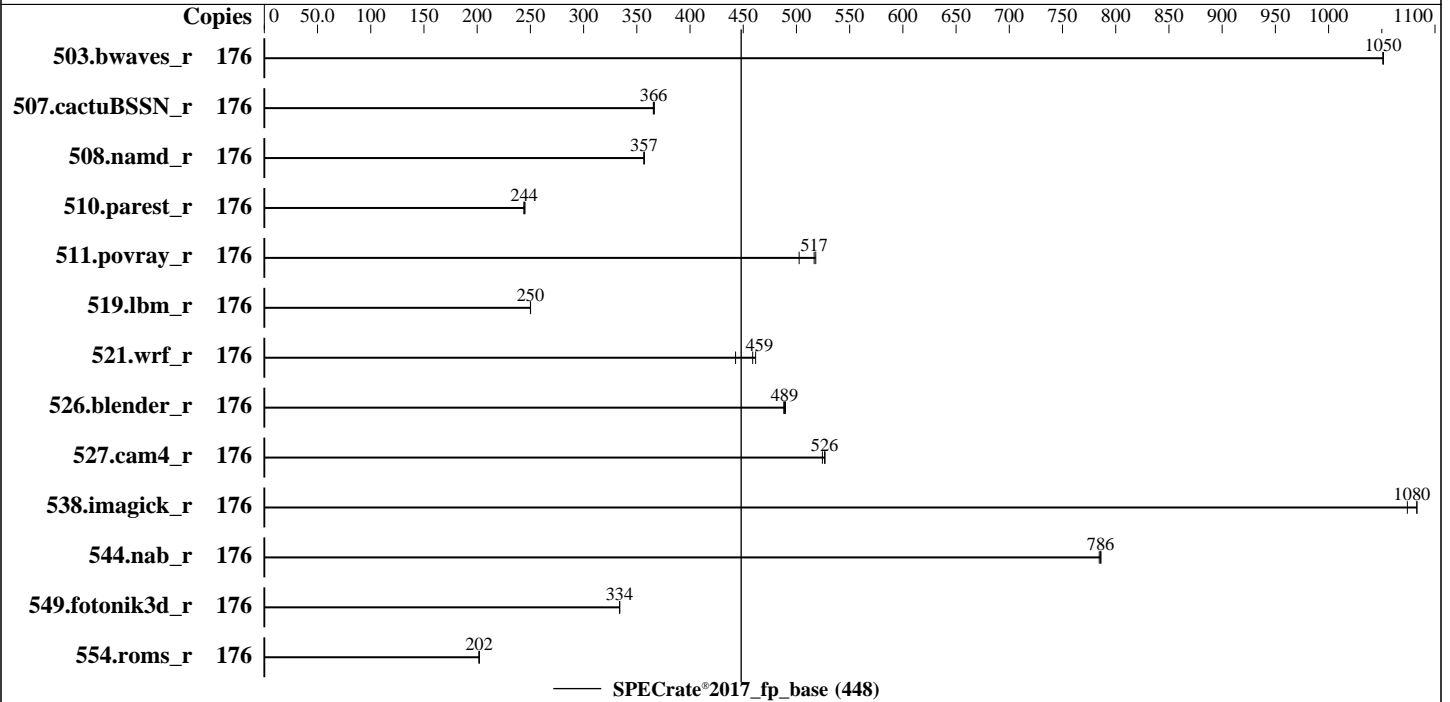

### Hardware

CPU Name: Intel Xeon Gold 6238L  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 88 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 30.25 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933V-R)  
 Storage: 1 x 300 GB 15K RPM SAS HDD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.3 released Mar-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: default



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	176	1679	1050	<b><u>1679</u></b>	<b><u>1050</u></b>	1679	1050							
507.cactuBSSN_r	176	610	366	608	366	<b><u>609</u></b>	<b><u>366</u></b>							
508.namd_r	176	<b><u>469</u></b>	<b><u>357</u></b>	468	357	469	357							
510.parest_r	176	1880	245	<b><u>1885</u></b>	<b><u>244</u></b>	1888	244							
511.povray_r	176	793	518	<b><u>795</u></b>	<b><u>517</u></b>	818	503							
519.lbm_r	176	742	250	742	250	<b><u>742</u></b>	<b><u>250</u></b>							
521.wrf_r	176	<b><u>859</u></b>	<b><u>459</u></b>	890	443	854	462							
526.blender_r	176	547	490	<b><u>548</u></b>	<b><u>489</u></b>	549	488							
527.cam4_r	176	<b><u>585</u></b>	<b><u>526</u></b>	584	527	587	524							
538.imagick_r	176	408	1070	404	1080	<b><u>404</u></b>	<b><u>1080</u></b>							
544.nab_r	176	378	785	<b><u>377</u></b>	<b><u>786</u></b>	377	786							
549.fotonik3d_r	176	2055	334	2054	334	<b><u>2055</u></b>	<b><u>334</u></b>							
554.roms_r	176	<b><u>1385</u></b>	<b><u>202</u></b>	1386	202	1385	202							

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:  
Intel HyperThreading Technology set to Enabled  
SNC set to Enabled  
IMC Interleaving set to 1-way Interleave  
Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-9yc8 Fri Oct 25 00:37:28 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6238L CPU @ 2.10GHz  
4 "physical id"s (chips)  
176 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 22  
siblings : 44  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 176  
On-line CPU(s) list: 0-175  
Thread(s) per core: 2  
Core(s) per socket: 22

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6238L CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K
NUMA node0 CPU(s): 0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
NUMA node1 CPU(s): 3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
NUMA node2 CPU(s): 22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
NUMA node3 CPU(s): 25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
NUMA node4 CPU(s): 44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
NUMA node5 CPU(s): 47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
NUMA node6 CPU(s): 66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
NUMA node7 CPU(s): 69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single mba tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local ibpb ibrs stibp
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
arch_capabilities ssbd

```

```
/proc/cpuinfo cache data
cache size : 30976 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106
node 0 size: 192094 MB
node 0 free: 185696 MB
node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

node 1 size: 193526 MB
node 1 free: 188915 MB
node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
128
node 2 size: 193526 MB
node 2 free: 188975 MB
node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
131
node 3 size: 193526 MB
node 3 free: 188975 MB
node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
150
node 4 size: 193526 MB
node 4 free: 188974 MB
node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
153
node 5 size: 193526 MB
node 5 free: 188974 MB
node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
172
node 6 size: 193526 MB
node 6 free: 188810 MB
node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
175
node 7 size: 193495 MB
node 7 free: 188950 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
  7:  21  21  21  21  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      1583871140 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Oct-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:15"
```

```
uname -a:
Linux linux-9yc8 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          No status reported
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
                                              Speculation, IBPB, IBRS_FW
```

```
run-level 3 Oct 24 19:52
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       xfs   280G   74G  206G  27% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Cisco Systems, Inc. C480M5.4.0.3.32.0301190121 03/01/2019
Vendor:    Cisco
Product:   UCSC-C480-M5
Serial:    FCH2238W00E
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
48x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

### Compiler Version Notes (Continued)

```
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 508.namd_r(base) 510.parest_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C | 511.povray_r(base) 526.blender_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L, 2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Cisco Systems**

Cisco UCS C480 M5 (Intel Xeon Gold 6238L,  
2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Portability Flags (Continued)

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6238L,  
2.10GHz)

SPECrate®2017\_fp\_base = 448

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-25 03:37:28-0400.

Report generated on 2020-07-23 15:58:38 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-25.