



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate®2017\_fp\_base = 255**

**SPECrate®2017\_fp\_peak = 274**

**Test Date:** Apr-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

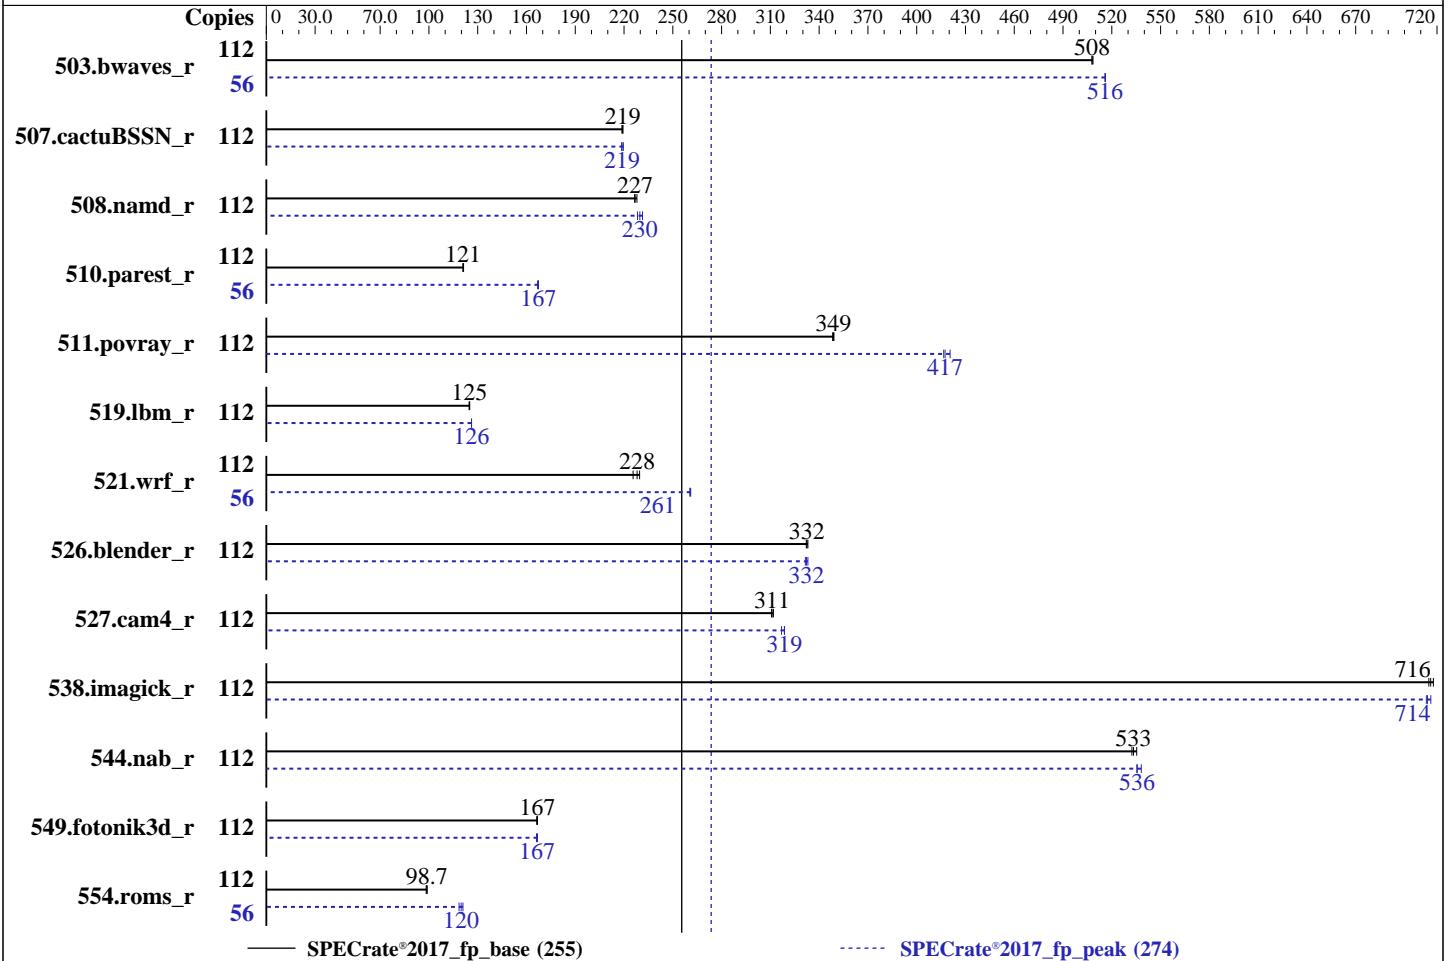

### Hardware

CPU Name: Intel Xeon Gold 6238R  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### OS:

SUSE Linux Enterprise Server 12 SP4  
 4.12.14-94.41-default

### Compiler:

C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux

### Parallel:

No

### Firmware:

Version 4.1.5 released May-2019

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

### Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

**SPECrate®2017\_fp\_base = 255**

**SPECrate®2017\_fp\_peak = 274**

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Feb-2020

Tested by: Inspur Corporation

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2209	508	2212	508	<b>2211</b>	<b>508</b>	56	<b>1088</b>	<b>516</b>	1088	516	1089	516
507.cactubSSN_r	112	648	219	<b>647</b>	<b>219</b>	646	219	112	649	219	<b>648</b>	<b>219</b>	646	220
508.namd_r	112	<b>469</b>	<b>227</b>	467	228	470	227	112	466	228	<b>463</b>	<b>230</b>	460	231
510.parest_r	112	<b>2420</b>	<b>121</b>	2423	121	2415	121	56	878	167	<b>876</b>	<b>167</b>	875	167
511.povray_r	112	<b>750</b>	<b>349</b>	749	349	751	348	112	628	417	622	421	<b>626</b>	<b>417</b>
519.lbm_r	112	947	125	<b>944</b>	<b>125</b>	944	125	112	935	126	<b>935</b>	<b>126</b>	936	126
521.wrf_r	112	1112	226	1093	230	<b>1100</b>	<b>228</b>	56	481	261	481	261	<b>481</b>	<b>261</b>
526.blender_r	112	512	333	514	332	<b>513</b>	<b>332</b>	112	<b>513</b>	<b>332</b>	515	332	512	333
527.cam4_r	112	631	311	628	312	<b>630</b>	<b>311</b>	112	618	317	<b>615</b>	<b>319</b>	615	319
538.imagick_r	112	<b>389</b>	<b>716</b>	388	718	390	715	112	390	713	389	716	<b>390</b>	<b>714</b>
544.nab_r	112	<b>353</b>	<b>533</b>	354	532	352	535	112	350	538	352	535	<b>352</b>	<b>536</b>
549.fotonik3d_r	112	<b>2618</b>	<b>167</b>	2618	167	2625	166	112	<b>2621</b>	<b>167</b>	2617	167	2627	166
554.roms_r	112	1799	98.9	<b>1804</b>	<b>98.7</b>	1810	98.3	56	<b>743</b>	<b>120</b>	736	121	751	119

**SPECrate®2017\_fp\_base = 255**

**SPECrate®2017\_fp\_peak = 274**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

SCALING\_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-mqjy Tue Apr 14 14:18:33 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Platform Notes (Continued)

CPU(s): 112  
On-line CPU(s) list: 0-111  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6238R CPU @ 2.20GHz  
Stepping: 7  
CPU MHz: 2200.000  
CPU max MHz: 4000.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79  
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83  
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107  
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 39424 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78 79  
node 0 size: 192031 MB  
node 0 free: 177977 MB  
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 255

Inspur NF5180M5 (Intel Xeon Gold 6238R)

SPECrate®2017\_fp\_peak = 274

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Feb-2020

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
82 83
node 1 size: 193501 MB
node 1 free: 181787 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 193530 MB
node 2 free: 181860 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193330 MB
node 3 free: 181414 MB
node distances:
node   0   1   2   3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      790931828 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 4
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-mqjy 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Apr 14 04:48 last=5

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	407G	74G	334G	19%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 4.1.5 05/21/2019  
Vendor: Inspur  
Product: NF5280M5  
Serial: 217406686

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Hynix HMAA4GR7AJR8N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Feb-2020

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_fp\_base = 255

Inspur NF5180M5 (Intel Xeon Gold 6238R)

SPECrate®2017\_fp\_peak = 274

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Feb-2020

Tested by: Inspur Corporation

Software Availability: May-2019

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Gold 6238R)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 255

SPECrate®2017\_fp\_peak = 274

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-14 14:18:33-0400.

Report generated on 2020-05-12 14:58:32 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.