



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

**SPECrate®2017\_int\_base = 397**

**SPECrate®2017\_int\_peak = 413**

CPU2017 License: 9016


Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

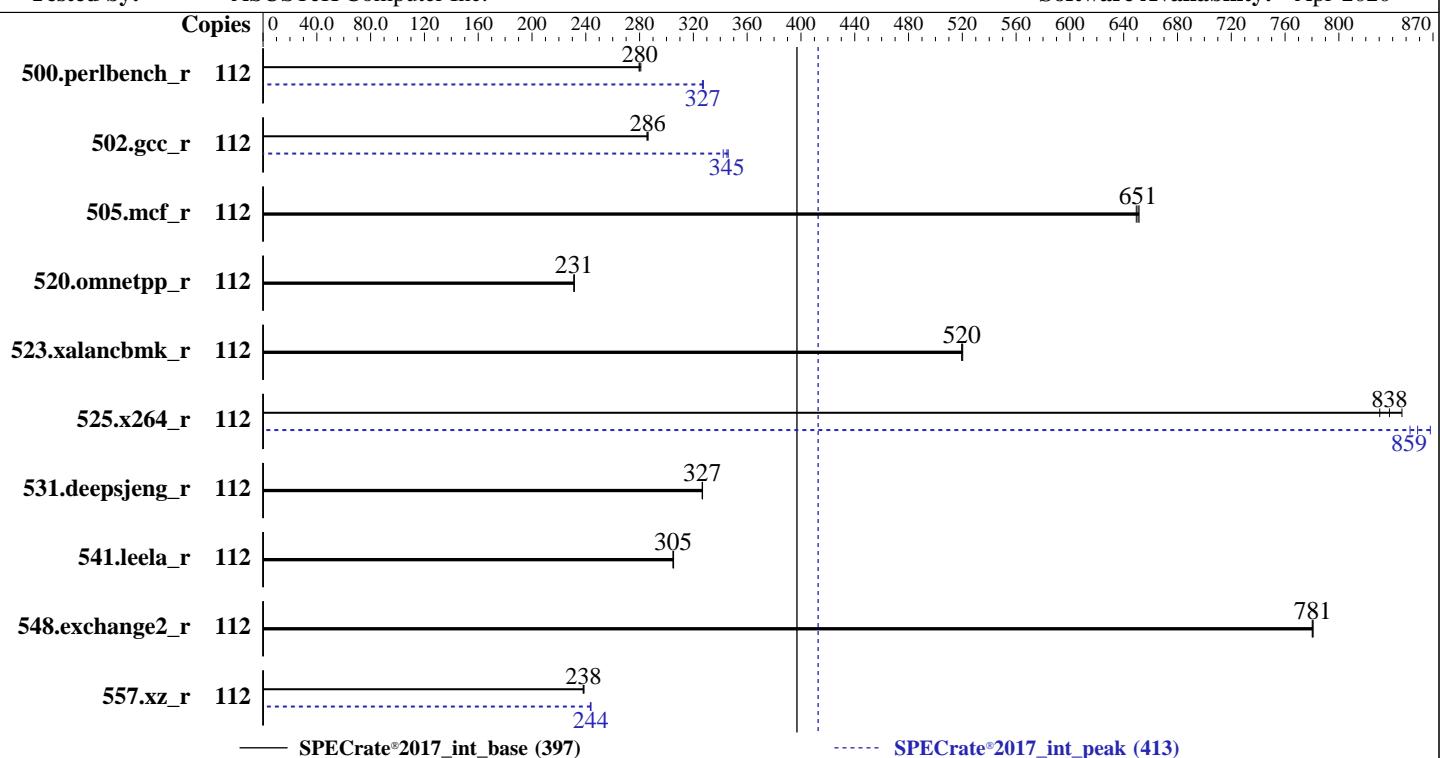

### Hardware

CPU Name: Intel Xeon Gold 6258R  
Max MHz: 4000  
Nominal: 2700  
Enabled: 56 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 1 TB SATA SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 15 SP1

Kernel 4.12.14-195-default

C/C++: Version 19.1.1.217 of Intel C/C++

Compiler Build 20200306 for Linux;

Fortran: Version 19.1.1.217 of Intel Fortran

Compiler Build 20200306 for Linux

### Compiler:

No

Version 6102 released Dec-2019

Parallel:  
Firmware:  
File System:  
System State:  
Base Pointers:  
Peak Pointers:  
Other:  
Power Management:

xfs

Run level 3 (multi-user)

64-bit

32/64-bit

jemalloc: jemalloc memory allocator library V5.0.1

BIOS and OS set to prefer performance at the cost of additional power usage

### Software



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

**SPECrate®2017\_int\_base = 397**

**SPECrate®2017\_int\_peak = 413**

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	<b>637</b>	<b>280</b>	638	280	635	281	112	<b>546</b>	<b>327</b>	545	327	<b>545</b>	<b>327</b>		
502.gcc_r	112	<b>554</b>	<b>286</b>	556	285	554	286	112	<b>460</b>	<b>345</b>	459	346	<b>463</b>	<b>342</b>		
505.mcf_r	112	279	649	278	651	<b>278</b>	<b>651</b>	112	279	649	278	651	<b>278</b>	<b>651</b>		
520.omnetpp_r	112	635	231	636	231	<b>635</b>	<b>231</b>	112	635	231	636	231	<b>635</b>	<b>231</b>		
523.xalancbmk_r	112	227	520	<b>228</b>	<b>520</b>	228	520	112	227	520	<b>228</b>	<b>520</b>	228	520		
525.x264_r	112	236	830	<b>234</b>	<b>838</b>	232	847	112	226	868	230	853	<b>228</b>	<b>859</b>		
531.deepsjeng_r	112	393	327	<b>393</b>	<b>327</b>	393	327	112	393	327	<b>393</b>	<b>327</b>	393	327		
541.leela_r	112	608	305	608	305	<b>608</b>	<b>305</b>	112	608	305	608	305	<b>608</b>	<b>305</b>		
548.exchange2_r	112	376	781	<b>376</b>	<b>781</b>	376	780	112	376	781	<b>376</b>	<b>781</b>	376	780		
557.xz_r	112	508	238	<b>507</b>	<b>238</b>	507	239	112	496	244	<b>496</b>	<b>244</b>	497	243		

**SPECrate®2017\_int\_base = 397**

**SPECrate®2017\_int\_peak = 413**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/191u1/lib/intel64:/191u1/lib/ia32:/191u1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The jemalloc library was configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = performance

SNC = Enabled

IMC interleaving = 1-way

Engine Boost = Level3(Max)

Enforce POR = Disable

Memory Frequency = 2933

LLC dead line allc = Disabled

SR-IOV Support = Disabled

CSM Support = Disabled

Sysinfo program /191ul/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011

running on linux-628j Mon Aug 3 17:07:55 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
  2 "physical id"s (chips)
  112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                112
On-line CPU(s) list:  0-111
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
Stepping:               7
CPU MHz:               2700.000
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                      aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

```
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 192077 MB
node 0 free: 191660 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 193530 MB
node 1 free: 193229 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 193501 MB
node 2 free: 193214 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193529 MB
node 3 free: 193207 MB
node distances:
node    0    1    2    3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      791182144 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*
os-release:
NAME="SLES"
VERSION="15-SP1"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

```
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-628j 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 3 17:06

SPEC is set to: /191u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	932G	43G	890G	5%	/

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 6102 12/05/2019
Vendor: ASUSTeK COMPUTER INC.
Product: Z11PP-D24 Series
Product Family: Server
Serial: System Serial Number
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-fuse-lld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -fuse-lld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/ia32\_lin  
-std=gnu89  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math  
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.1.217/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E9(Z11PP-D24) Server System  
(2.70 GHz, Intel Xeon Gold 6258R)

SPECrate®2017\_int\_base = 397

SPECrate®2017\_int\_peak = 413

CPU2017 License: 9016

Test Date: Aug-2020

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Feb-2020

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2020

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revH.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-03 05:07:55-0400.

Report generated on 2020-09-29 15:26:12 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-29.