



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

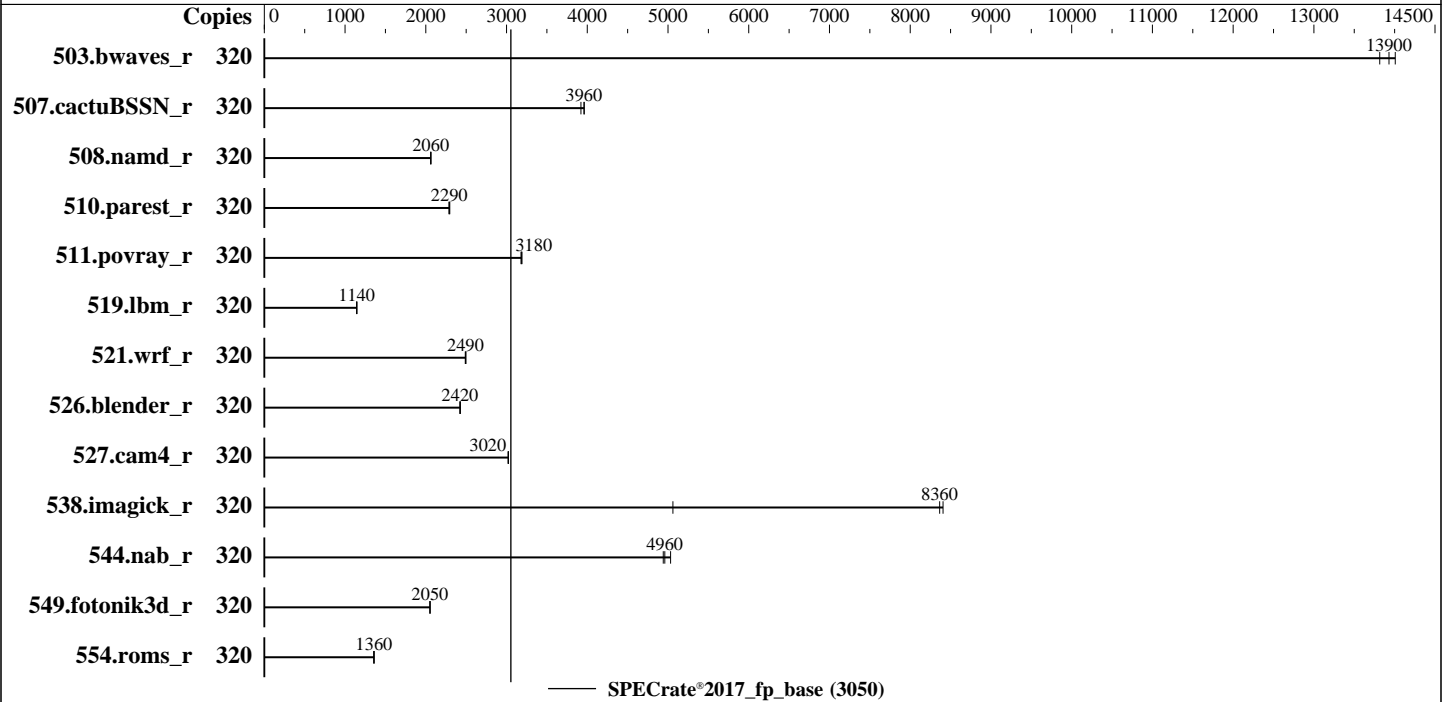

Hardware

CPU Name: Intel Xeon Platinum 8460H
 Max MHz: 3800
 Nominal: 2200
 Enabled: 320 cores, 8 chips
 Orderable: 8 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x SATA SSD, 3.84TB
 Other: 1 x Fujitsu PRAID EP740i Raid Card

Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.2.0 for D4029-C1x. Released Jun-2023 tested as V1.0.0.0 R0.11.0 for D4029-C1x Feb-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	320	230	13900	229	14000	232	13800							
507.cactuBSSN_r	320	102	3960	103	3920	102	3960							
508.namd_r	320	147	2060	148	2060	147	2060							
510.parest_r	320	364	2300	365	2290	366	2290							
511.povray_r	320	234	3190	235	3180	235	3180							
519.lbm_r	320	295	1140	294	1150	295	1140							
521.wrf_r	320	288	2490	288	2490	287	2500							
526.blender_r	320	201	2420	201	2430	201	2420							
527.cam4_r	320	185	3020	185	3020	185	3020							
538.imagick_r	320	94.7	8410	95.1	8360	157	5060							
544.nab_r	320	107	5030	109	4940	109	4960							
549.fotonik3d_r	320	608	2050	608	2050	608	2050							
554.roms_r	320	375	1360	374	1360	374	1360							

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper-Threading = Disabled
SNC (Sub NUMA) = Enable SNC4

Sysinfo program /home/benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu May 18 19:33:30 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
19:33:30 up 2:59, 2 users, load average: 1.17, 100.82, 216.67
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 16:36 2:57m 0.06s 0.06s -bash
root pts/0 192.168.1.114 16:36 2:56m 2.78s 0.20s

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
/home/benchmark/ptu_v4.0/UNIFIED_SERVER_PTAT_V4.0.0_20230110/ptat -mon -i 5000000 -filter 0x3f -y -ts -csv -log
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 16510451
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 16510451
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8460H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 40
siblings       : 40
8 physical ids (chips)
320 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 2: core ids 0-39

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

physical id 3: core ids 0-39
physical id 4: core ids 0-39
physical id 5: core ids 0-39
physical id 6: core ids 0-39
physical id 7: core ids 0-39
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78
physical id 1: apicids
128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206
physical id 2: apicids
256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 290, 292, 294, 296, 298, 300, 302, 304, 306, 308, 310, 312, 314, 316, 318, 320, 322, 324, 326, 328, 330, 332, 334
physical id 3: apicids
384, 386, 388, 390, 392, 394, 396, 398, 400, 402, 404, 406, 408, 410, 412, 414, 416, 418, 420, 422, 424, 426, 428, 430, 432, 434, 436, 438, 440, 442, 444, 446, 448, 450, 452, 454, 456, 458, 460, 462
physical id 4: apicids
512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590
physical id 5: apicids
640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718
physical id 6: apicids
768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798, 800, 802, 804, 806, 808, 810, 812, 814, 816, 818, 820, 822, 824, 826, 828, 830, 832, 834, 836, 838, 840, 842, 844, 846
physical id 7: apicids
896, 898, 900, 902, 904, 906, 908, 910, 912, 914, 916, 918, 920, 922, 924, 926, 928, 930, 932, 934, 936, 938, 940, 942, 944, 946, 948, 950, 952, 954, 956, 958, 960, 962, 964, 966, 968, 970, 972, 974

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 320
On-line CPU(s) list:   0-319
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8460H
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    40
Socket(s):              8
Stepping:               6
CPU max MHz:            3800.0000
CPU min MHz:            800.0000
BogoMIPS:               4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
amx_tile flush_l1d arch_capabilities

Virtualization:

L1d cache: 15 MiB (320 instances)
L1i cache: 10 MiB (320 instances)
L2 cache: 640 MiB (320 instances)
L3 cache: 840 MiB (8 instances)

NUMA node(s): 32
NUMA node0 CPU(s): 0-9
NUMA node1 CPU(s): 10-19
NUMA node2 CPU(s): 20-29
NUMA node3 CPU(s): 30-39
NUMA node4 CPU(s): 40-49
NUMA node5 CPU(s): 50-59
NUMA node6 CPU(s): 60-69
NUMA node7 CPU(s): 70-79
NUMA node8 CPU(s): 80-89
NUMA node9 CPU(s): 90-99
NUMA node10 CPU(s): 100-109
NUMA node11 CPU(s): 110-119
NUMA node12 CPU(s): 120-129
NUMA node13 CPU(s): 130-139
NUMA node14 CPU(s): 140-149
NUMA node15 CPU(s): 150-159
NUMA node16 CPU(s): 160-169
NUMA node17 CPU(s): 170-179
NUMA node18 CPU(s): 180-189
NUMA node19 CPU(s): 190-199
NUMA node20 CPU(s): 200-209
NUMA node21 CPU(s): 210-219
NUMA node22 CPU(s): 220-229
NUMA node23 CPU(s): 230-239
NUMA node24 CPU(s): 240-249
NUMA node25 CPU(s): 250-259
NUMA node26 CPU(s): 260-269
NUMA node27 CPU(s): 270-279
NUMA node28 CPU(s): 280-289
NUMA node29 CPU(s): 290-299
NUMA node30 CPU(s): 300-309
NUMA node31 CPU(s): 310-319

Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	15M	12	Data	1	64	1	64
L1i	32K	10M	8	Instruction	1	64	1	64
L2	2M	640M	16	Unified	2	2048	1	64
L3	105M	840M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

```

node 0 cpus: 0-9
node 0 size: 128470 MB
node 0 free: 126962 MB
node 1 cpus: 10-19
node 1 size: 129021 MB
node 1 free: 128473 MB
node 2 cpus: 20-29
node 2 size: 129021 MB
node 2 free: 128467 MB
node 3 cpus: 30-39
node 3 size: 129021 MB
node 3 free: 128478 MB
node 4 cpus: 40-49
node 4 size: 129021 MB
node 4 free: 128528 MB
node 5 cpus: 50-59
node 5 size: 129021 MB
node 5 free: 128522 MB
node 6 cpus: 60-69
node 6 size: 129021 MB
node 6 free: 128521 MB
node 7 cpus: 70-79
node 7 size: 129021 MB
node 7 free: 128504 MB
node 8 cpus: 80-89
node 8 size: 129021 MB
node 8 free: 128518 MB
node 9 cpus: 90-99
node 9 size: 129021 MB
node 9 free: 128519 MB
node 10 cpus: 100-109
node 10 size: 129021 MB
node 10 free: 128510 MB
node 11 cpus: 110-119
node 11 size: 129021 MB
node 11 free: 128516 MB
node 12 cpus: 120-129
node 12 size: 129021 MB
node 12 free: 128506 MB
node 13 cpus: 130-139
node 13 size: 129021 MB
node 13 free: 128510 MB
node 14 cpus: 140-149
node 14 size: 129021 MB
node 14 free: 128497 MB
node 15 cpus: 150-159
node 15 size: 129021 MB
node 15 free: 128517 MB
node 16 cpus: 160-169
node 16 size: 129021 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 16 free: 128528 MB
node 17 cpus: 170-179
node 17 size: 129021 MB
node 17 free: 128490 MB
node 18 cpus: 180-189
node 18 size: 129021 MB
node 18 free: 128527 MB
node 19 cpus: 190-199
node 19 size: 129021 MB
node 19 free: 128523 MB
node 20 cpus: 200-209
node 20 size: 129021 MB
node 20 free: 128518 MB
node 21 cpus: 210-219
node 21 size: 129021 MB
node 21 free: 128514 MB
node 22 cpus: 220-229
node 22 size: 129021 MB
node 22 free: 128527 MB
node 23 cpus: 230-239
node 23 size: 129021 MB
node 23 free: 128517 MB
node 24 cpus: 240-249
node 24 size: 129021 MB
node 24 free: 128471 MB
node 25 cpus: 250-259
node 25 size: 129021 MB
node 25 free: 128520 MB
node 26 cpus: 260-269
node 26 size: 129021 MB
node 26 free: 128525 MB
node 27 cpus: 270-279
node 27 size: 128986 MB
node 27 free: 128490 MB
node 28 cpus: 280-289
node 28 size: 129021 MB
node 28 free: 128437 MB
node 29 cpus: 290-299
node 29 size: 129021 MB
node 29 free: 128521 MB
node 30 cpus: 300-309
node 30 size: 129021 MB
node 30 free: 128512 MB
node 31 cpus: 310-319
node 31 size: 128563 MB
node 31 free: 128067 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 12 12 12 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
1: 12 10 12 12 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
2: 12 12 10 12 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
3: 12 12 12 10 21 21 21 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31
4: 21 21 21 21 21 10 12 12 12 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21
5: 21 21 21 21 12 10 12 12 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

31 31 31 21 21 21 21
6: 21 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
7: 21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
8: 21 21 21 21 31 31 31 31 31 10 12 12 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
9: 21 21 21 21 31 31 31 31 31 12 10 12 12 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
10: 21 21 21 21 31 31 31 31 31 12 12 10 12 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
11: 21 21 21 21 31 31 31 31 12 12 12 10 21 21 21 21 21 21 21 31 31 31 31 31
31 31 31 21 21 21 21
12: 31 31 31 31 31 21 21 21 21 21 21 10 12 12 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
13: 31 31 31 31 21 21 21 21 21 21 21 12 10 12 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
14: 31 31 31 31 21 21 21 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
15: 31 31 31 31 21 21 21 21 21 21 21 12 12 12 10 31 31 31 31 21 21 21 21 21
21 21 21 31 31 31 31
16: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 10 12 12 12 21 21 21 21 21
21 21 21 31 31 31 31
17: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 10 12 12 21 21 21 21 21
21 21 21 31 31 31 31
18: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 12 10 12 21 21 21 21 21
21 21 21 31 31 31 31
19: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 12 12 12 10 21 21 21 21 21
21 21 21 31 31 31 31
20: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 10 12 12 12 31
31 31 31 21 21 21 21
21: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 12 10 12 12 31
31 31 31 21 21 21 21
22: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 12 12 10 12 31
31 31 31 21 21 21 21
23: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 12 12 12 10 31
31 31 31 21 21 21 21
24: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 10
12 12 12 21 21 21 21
25: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
10 12 12 21 21 21 21
26: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
12 10 12 21 21 21 21
27: 21 21 21 21 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 31 31 31 31 12
12 12 10 21 21 21 21
28: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 10 12 12 12
29: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 10 12 12
30: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 12 10 12
31: 31 31 31 31 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      4226701124 kB
-----

```

```

10. who -r

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

run-level 3 May 18 16:35

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time
* smartd.service	loaded	failed	failed	Self Monitoring and Reporting Technology (SMART) Daemon

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower
indirect	wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=c13187e0-8b8c-4db9-ba32-defae6e6232c
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=375M,high
crashkernel=72M,low

15. cpupower frequency-info

analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "powersave" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.dirty_expire_centisecs    3000
vm.dirty_ratio               20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages  0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /home/benchmark/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   3.5T  46G  3.5T   2% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         n/a
Product Family: SERVER
Serial:          n/a

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
31x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
26x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU
BIOS Version: V1.0.0.0 R0.11.0 for D4029-Clx
BIOS Date: 02/28/2023
BIOS Revision: 0.11
Firmware Revision: 2.0

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H, 2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8460H,
2.20GHz

SPECrate®2017_fp_base = 3050

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-18 06:33:29-0400.

Report generated on 2023-08-16 14:13:30 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.