



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081


Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

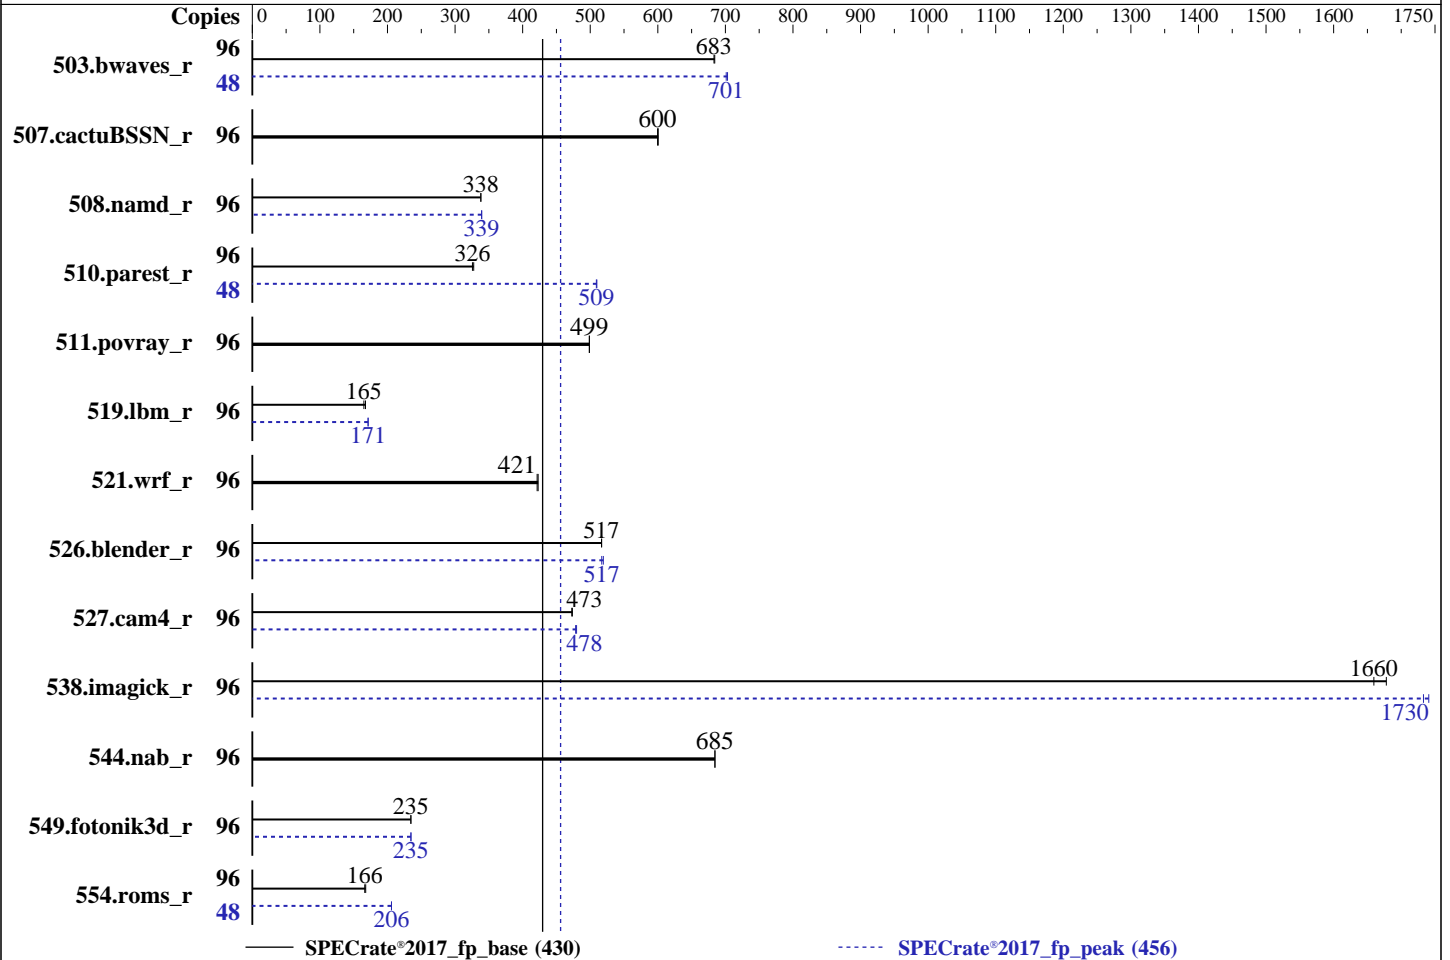

## Hardware

CPU Name: AMD EPYC 7443  
 Max MHz: 4000  
 Nominal: 2850  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA III SSD  
 Other: None

## Software

OS: Ubuntu 22.04.2 LTS  
 Kernel 5.15.0-79-generic x86\_64  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: No  
 Firmware: BIOS Version 1401 released Apr-2023  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1407	684	<u>1409</u>	<u>683</u>			48	<u>686</u>	<u>701</u>	685	703		
507.cactuBSSN_r	96	202	601	<u>203</u>	<u>600</u>			96	202	601	<u>203</u>	<u>600</u>		
508.namd_r	96	<u>270</u>	<u>338</u>	270	338			96	269	339	<u>269</u>	<u>339</u>		
510.parest_r	96	767	328	<u>771</u>	<u>326</u>			48	246	510	<u>247</u>	<u>509</u>		
511.povray_r	96	449	499	<u>450</u>	<u>499</u>			96	449	499	<u>450</u>	<u>499</u>		
519.lbm_r	96	<u>613</u>	<u>165</u>	604	167			96	590	171	<u>591</u>	<u>171</u>		
521.wrf_r	96	508	423	<u>510</u>	<u>421</u>			96	508	423	<u>510</u>	<u>421</u>		
526.blender_r	96	<u>283</u>	<u>517</u>	283	517			96	<u>283</u>	<u>517</u>	281	519		
527.cam4_r	96	355	474	<u>355</u>	<u>473</u>			96	<u>351</u>	<u>478</u>	350	480		
538.imagick_r	96	<u>144</u>	<u>1660</u>	142	1680			96	137	1740	<u>138</u>	<u>1730</u>		
544.nab_r	96	<u>236</u>	<u>685</u>	236	685			96	<u>236</u>	<u>685</u>	236	685		
549.fotonik3d_r	96	1595	235	<u>1595</u>	<u>235</u>			96	<u>1595</u>	<u>235</u>	1593	235		
554.roms_r	96	909	168	<u>917</u>	<u>166</u>			48	<u>370</u>	<u>206</u>	370	206		

SPECrate®2017\_fp\_base = 430

SPECrate®2017\_fp\_peak = 456

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
'sync; sysctl -w vm.drop\_caches=3' was used to clear filesystem caches

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/cpu2017.1.1.9/amd_rate_aocc320_milanx_A_lib/lib;/cpu2017.1.1.9/amd_rate_aocc320_milanx_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

Bios settings:

Engine Boost = Enabled  
SVM Mode = Disabled  
NUMA nodes per socket = NPS4  
ACPI SRAT L3 Cache as NUMA Domain = Enabled  
DLWM Support = Disabled  
APBDIS = 1  
Fix SOC P-state = P0

Sysinfo program /cpu2017.1.1.9/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sut Fri Sep 15 14:35:32 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2021

**Software Availability:** Jul-2023

## Platform Notes (Continued)

```

6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux sut 5.15.0-79-generic #86-Ubuntu SMP Mon Jul 10 16:07:21 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
 14:35:32 up 4:02, 3 users, load average: 53.34, 84.71, 90.93
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
test   tty1    -                10:35   3:59m  0.47s  0.00s -bash
test   pts/0   -                10:36   3:57m  1.18s  0.43s sudo -s
test   tty2    -                10:37   3:58m  0.04s  0.01s more /proc/cpuinfo

```

```

-----
3. Username
From environment variable $USER:  root
From the command 'logname':      test

```

```

-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            2062751
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio            0

```

```

-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo -s
sudo -s
/bin/bash

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Platform Notes (Continued)

```
python3 ./run_amd_rate_aocc320_milanx_A1.py
/bin/bash ./amd_rate_aocc320_milanx_A1.sh
runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 fprate
runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017.1.1.9
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 7443 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011a9
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 2560 4K pages
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 1: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
physical id 1: apicids 64-75,80-91,96-107,112-123
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 7443 24-Core Processor
CPU family:            25
Model:                 1
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           4035.6440
CPU min MHz:           1500.0000
BogoMIPS:              5689.86
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                        xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                        misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                        perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Platform Notes (Continued)

```
erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt
xsavvec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pftthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
vpclmulqdq rdpid overflow_recov succor smca fsrm
```

AMD-V

```
Virtualization:
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 24 MiB (48 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	512K	24M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-5,48-53
node 0 size: 64308 MB
node 0 free: 63669 MB
node 1 cpus: 6-11,54-59
node 1 size: 64508 MB
node 1 free: 63522 MB
node 2 cpus: 12-17,60-65
node 2 size: 64508 MB
node 2 free: 63902 MB
node 3 cpus: 18-23,66-71
node 3 size: 64496 MB
node 3 free: 63914 MB
node 4 cpus: 24-29,72-77
node 4 size: 64508 MB
node 4 free: 63977 MB
node 5 cpus: 30-35,78-83
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Platform Notes (Continued)

```

node 5 size: 64508 MB
node 5 free: 63965 MB
node 6 cpus: 36-41,84-89
node 6 size: 64461 MB
node 6 free: 63931 MB
node 7 cpus: 42-47,90-95
node 7 size: 64502 MB
node 7 free: 63956 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10

```

```

-----
9. /proc/meminfo
MemTotal:      528181544 kB

```

```

-----
10. who -r
run-level 5 Sep 15 10:35

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
Default Target   Status
graphical        degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

```

-----
13. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
           blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
           e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup
           lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb
           snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
           systemd-timesyncd thermald unattended-upgrades wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled    console-getty debug-shell ipmievd iscsid serial-getty@ systemd-boot-check-no-failures
           systemd-network-generator systemd-sysexit systemd-time-wait-sync upower
           wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated   apport cpufrequtils loadcpufreq openipmi
masked     cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot numad rc rcS screen-cleanup
           sudo tuned x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-79-generic
root=UUID=ca6cbc2c-44a5-484e-a5b4-38016e430e94
ro

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Platform Notes (Continued)

15. cpupower frequency-info  
CPU scaling: performance

```

16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.2 LTS

```

```

20. Disk information
SPEC is set to: /cpu2017.1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  879G  44G  790G   6% /

```

```

21. /sys/devices/virtual/dmi/id
Vendor:          Epsilon
Product:         eterio 227 RZ2 90SF01G5-M01620
Product Family: Server
Serial:          02300666

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

**CPU2017 License:** 9081  
**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa  
**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2021  
**Software Availability:** Jul-2023

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

16x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200  
16x Unknown Unknown

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 1401  
BIOS Date: 04/26/2023  
BIOS Revision: 14.1

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Compiler Version Notes (Continued)

```

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

```

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

```

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2021

**Software Availability:** Jul-2023

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430

SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Peak Optimization Flags (Continued)

519.lbm\_r (continued):

```
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick\_r: Same as 519.lbm\_r

544.nab\_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-flv-function-specialization -mllvm -enable-licm-vrp  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Peak Optimization Flags (Continued)

503.bwaves\_r (continued):

```
-lamdlibm -ljemalloc -lflang
```

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
```

```
-Mrecursive -mllvm -reduce-array-computations=3
```

```
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

```
-lamdlibm -ljemalloc -lflang
```

554.roms\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
```

```
-mllvm -reduce-array-computations=3
```

```
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
```

```
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
```

```
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

```
-Wl,-mllvm -Wl,-function-specialize
```

```
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
```

```
-march=znver3 -fveclib=AMDLIBM -ffast-math
```

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
```

```
-fremap-arrays -flv-function-specialization
```

```
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

```
-mllvm -global-vectorize-slp=true
```

```
-mllvm -function-specialize -mllvm -enable-licm-vrp
```

```
-mllvm -reduce-array-computations=3 -O3 -funroll-loops
```

```
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
```

```
-Mrecursive -Hz,1,0x1 -mllvm -enable-loopinterchange
```

```
-mllvm -compute-interchange-order -lamdlibm -ljemalloc
```

```
-lflang
```

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023

Hardware Availability: Mar-2021

Software Availability: Jul-2023

## Peak Optimization Flags (Continued)

511.povray\_r: basepeak = yes

```
526.blender_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa  
eterio 227 RZ2 (AMD EPYC 7443, 2.85 GHz)

SPECrate®2017\_fp\_base = 430  
SPECrate®2017\_fp\_peak = 456

**CPU2017 License:** 9081

**Test Sponsor:** Epsilon Sp. z o.o. Sp. Komandytowa

**Tested by:** Epsilon Sp. z o.o. Sp. Komandytowa

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2021

**Software Availability:** Jul-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevD-OCT-2023-For-AMD-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevD-OCT-2023-For-AMD-Platform.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-15 10:35:32-0400.

Report generated on 2023-10-11 12:33:47 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-10.