



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

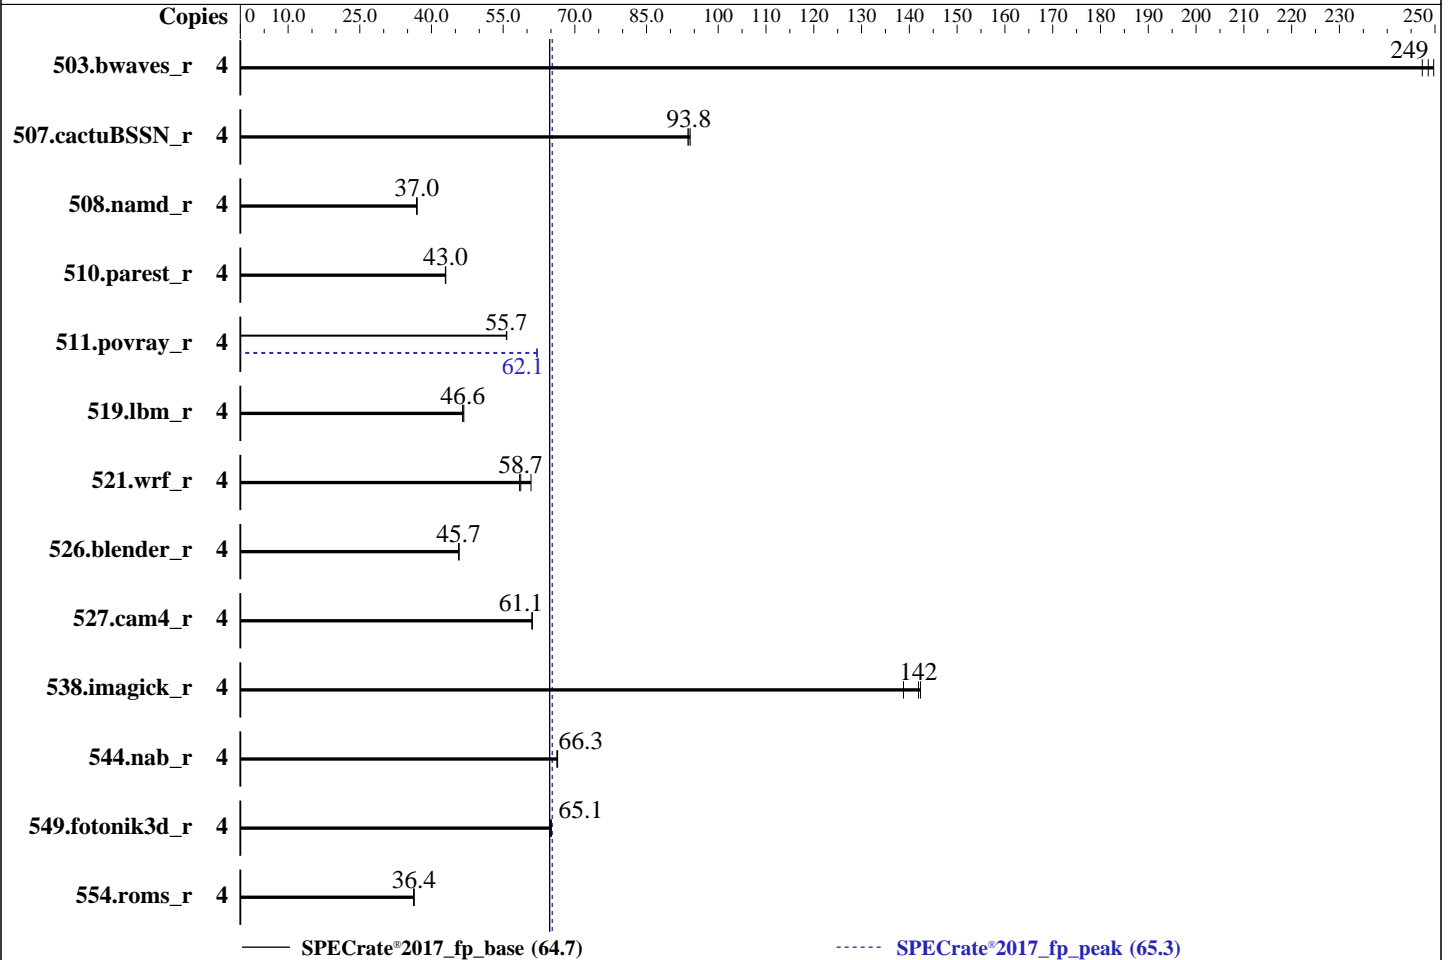

### Hardware

CPU Name: Intel Xeon E-2414  
 Max MHz: 4500  
 Nominal: 2600  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version CTE101Z 1.10 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jan-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	4	<b>161</b>	<b>249</b>	162	247	161	250	4	<b>161</b>	<b>249</b>	162	247	161	250
507.cactuBSSN_r	4	53.8	94.1	<b>54.0</b>	<b>93.8</b>	54.1	93.7	4	53.8	94.1	<b>54.0</b>	<b>93.8</b>	54.1	93.7
508.namd_r	4	103	37.0	<b>103</b>	<b>37.0</b>	103	36.9	4	103	37.0	<b>103</b>	<b>37.0</b>	103	36.9
510.parest_r	4	<b>244</b>	<b>43.0</b>	244	43.0	244	42.9	4	<b>244</b>	<b>43.0</b>	244	43.0	244	42.9
511.povray_r	4	<b>168</b>	<b>55.7</b>	168	55.7	168	55.7	4	151	62.0	150	62.1	<b>150</b>	<b>62.1</b>
519.lbm_r	4	<b>90.5</b>	<b>46.6</b>	90.1	46.8	90.7	46.5	4	<b>90.5</b>	<b>46.6</b>	90.1	46.8	90.7	46.5
521.wrf_r	4	153	58.4	147	60.8	<b>153</b>	<b>58.7</b>	4	153	58.4	147	60.8	<b>153</b>	<b>58.7</b>
526.blender_r	4	133	45.8	133	45.7	<b>133</b>	<b>45.7</b>	4	133	45.8	133	45.7	<b>133</b>	<b>45.7</b>
527.cam4_r	4	115	61.1	115	61.1	<b>115</b>	<b>61.1</b>	4	115	61.1	115	61.1	<b>115</b>	<b>61.1</b>
538.imagick_r	4	69.9	142	71.7	139	<b>70.1</b>	<b>142</b>	4	69.9	142	71.7	139	<b>70.1</b>	<b>142</b>
544.nab_r	4	<b>101</b>	<b>66.3</b>	101	66.4	102	66.3	4	<b>101</b>	<b>66.3</b>	101	66.4	102	66.3
549.fotonik3d_r	4	<b>240</b>	<b>65.1</b>	240	64.9	240	65.1	4	<b>240</b>	<b>65.1</b>	240	64.9	240	65.1
554.roms_r	4	175	36.2	175	36.4	<b>175</b>	<b>36.4</b>	4	175	36.2	175	36.4	<b>175</b>	<b>36.4</b>

SPECrate®2017\_fp\_base = **64.7**

SPECrate®2017\_fp\_peak = **65.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"  
MALLOCONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 64.7

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jan 17 18:50:13 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:50:13 up 5:53, 2 users, load average: 3.19, 3.82, 3.94
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 12:57 2:54m 0.79s 0.01s -bash
root tty2 - 18:08 41:31 0.01s 0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 256797
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 256797
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

-----

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=4 -c
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define cores=4 --define physicalfirst --define no-numa --tune
  base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=4 --configfile
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define cores=4 --define physicalfirst --define no-numa --tune
  base,peak --output_format all --define drop_caches --nopower --runmode rate --tune base:peak --size
  rfrate fprate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.313/templogs/preenv.fprate.313.0.log
  --lognum 313.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

-----

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) E E-2414
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 4
siblings      : 4
1 physical ids (chips)
4 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0,2,4,6
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----

7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

Address sizes:          42 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                4
On-line CPU(s) list:   0-3
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) E E-2414
CPU family:            6
Model:                 183
Thread(s) per core:    1
Core(s) per socket:    4
Socket(s):             1
Stepping:              1
BogoMIPS:              5222.40
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                        clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                        avx_vnni dtherm ida arat pln pts hfi umip pku ospke waitpkg gfni vaes
                        vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig
                        arch_lbr flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             192 KiB (4 instances)
L1i cache:             128 KiB (4 instances)
L2 cache:              8 MiB (4 instances)
L3 cache:              12 MiB (1 instance)
NUMA node(s):          1
NUMA node0 CPU(s):    0-3
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	192K	12	Data	1	64	1	64
L1i	32K	128K	8	Instruction	1	64	1	64
L2	2M	8M	16	Unified	2	2048	1	64
L3	12M	12M	6	Unified	3	32768	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-3
node 0 size: 64229 MB
node 0 free: 61620 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
node distances:
node      0
0:        10
```

```
-----
9. /proc/meminfo
MemTotal:      65770876 kB
```

```
-----
10. who -r
run-level 3 Jan 17 12:57
```

```
-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallD gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated      ntp_sync
indirect       wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1a7e87cc-1541-4a67-83ce-e77f091f769b
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes              0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio              20
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda2   xfs   1.8T  30G  1.8T   2% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem ST250 V3
Product Family: ThinkSystem
Serial:      1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Samsung M324R4GA3BB0-CQKOL 32 GB 2 rank 4800, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

BIOS Vendor: Lenovo  
BIOS Version: CTE101Z-1.10  
BIOS Date: 12/27/2023  
BIOS Revision: 1.10  
Firmware Revision: 1.10

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 64.7

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_peak = 65.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 64.7

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 64.7

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_peak = 65.3

**CPU2017 License:** 9017

**Test Date:** Jan-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECrate®2017\_fp\_base = 64.7

SPECrate®2017\_fp\_peak = 65.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-17 05:50:13-0500.

Report generated on 2024-02-20 14:11:49 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-20.