



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 480

### PowerEdge R760xa (Intel Xeon Gold 6526Y)

### SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573


Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

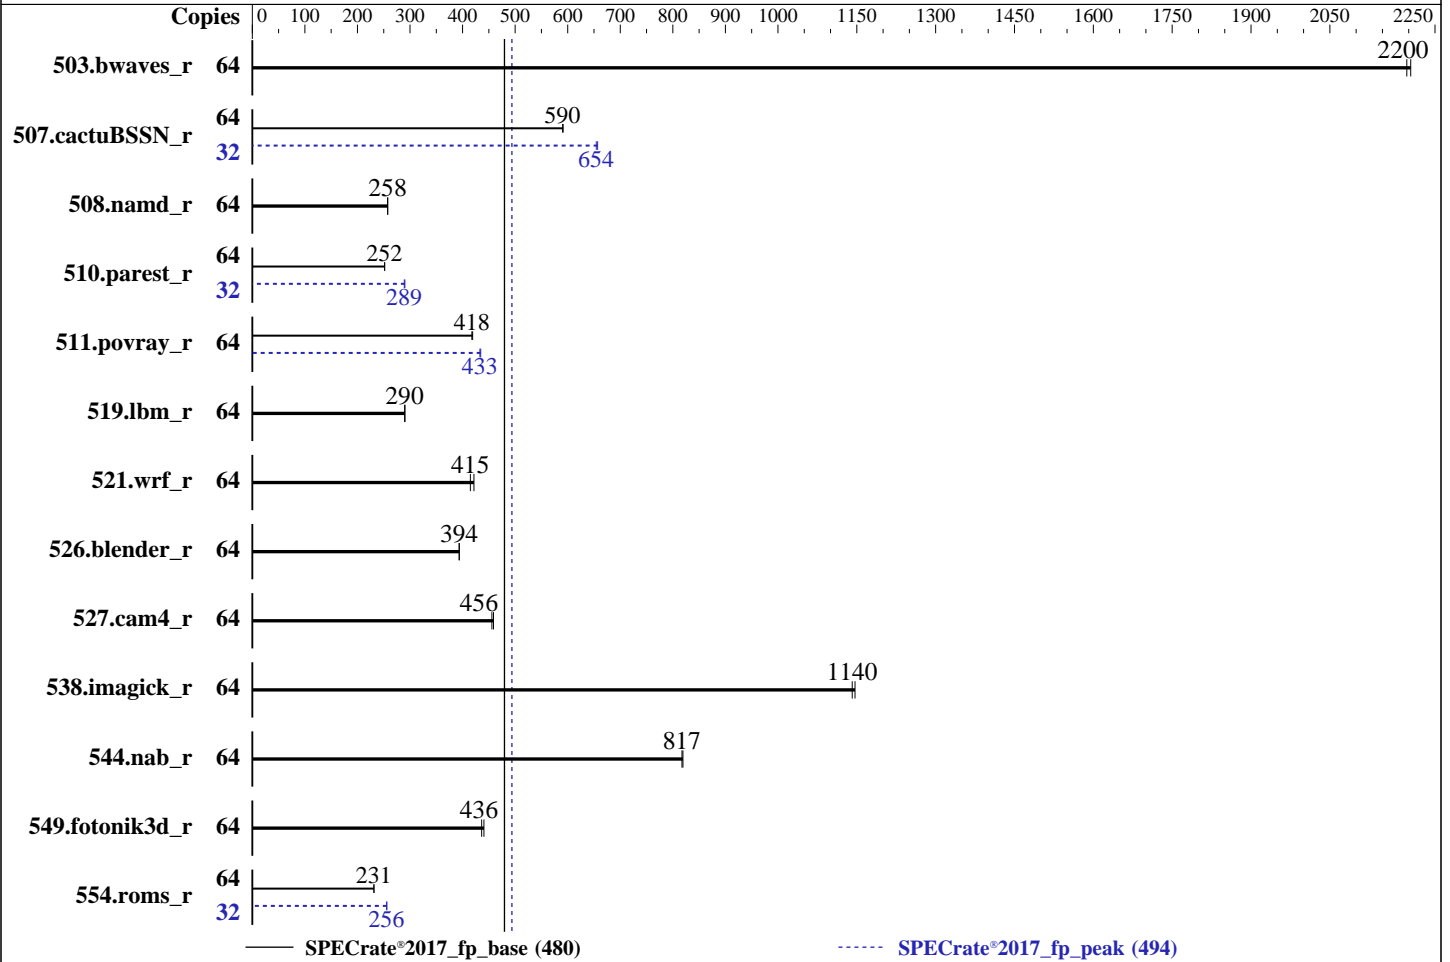

### Hardware

CPU Name: Intel Xeon Gold 6526Y  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 60 GB on tmpfs  
 Other: Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.0.0 released Nov-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 480

## PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	291	2200	<u>292</u>	<u>2200</u>			64	291	2200	<u>292</u>	<u>2200</u>		
507.cactuBSSN_r	64	<u>137</u>	<u>590</u>	137	591			32	<u>61.9</u>	<u>654</u>	61.7	657		
508.namd_r	64	<u>236</u>	<u>258</u>	236	258			64	<u>236</u>	<u>258</u>	236	258		
510.parest_r	64	665	252	<u>665</u>	<u>252</u>			32	<u>290</u>	<u>289</u>	288	290		
511.povray_r	64	357	419	<u>358</u>	<u>418</u>			64	<u>345</u>	<u>433</u>	344	435		
519.lbm_r	64	232	290	<u>233</u>	<u>290</u>			64	232	290	<u>233</u>	<u>290</u>		
521.wrf_r	64	<u>346</u>	<u>415</u>	340	422			64	<u>346</u>	<u>415</u>	340	422		
526.blender_r	64	<u>248</u>	<u>394</u>	248	394			64	<u>248</u>	<u>394</u>	248	394		
527.cam4_r	64	<u>246</u>	<u>456</u>	244	459			64	<u>246</u>	<u>456</u>	244	459		
538.imagick_r	64	<u>139</u>	<u>1140</u>	139	1150			64	<u>139</u>	<u>1140</u>	139	1150		
544.nab_r	64	131	819	<u>132</u>	<u>817</u>			64	131	819	<u>132</u>	<u>817</u>		
549.fotonik3d_r	64	<u>572</u>	<u>436</u>	566	441			64	<u>572</u>	<u>436</u>	566	441		
554.roms_r	64	439	231	<u>440</u>	<u>231</u>			32	199	256	<u>199</u>	<u>256</u>		

SPECrate®2017\_fp\_base = 480

SPECrate®2017\_fp\_peak = 494

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOCCONF = "retain:true"
```

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
DCU Streamer Prefetcher : Disabled  
LLC Prefetch : Disabled  
Dead Line LLC Alloc : Disabled  
Optimizer Mode : Enabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Dec 28 17:46:26 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
17:46:26 up 4:24, 1 user, load average: 41.02, 58.21, 61.63
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:22 3:29m 1.40s 0.00s /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124081
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124081
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.5.1 --output_format html, pdf, txt --define DL-LQC=1 fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base, peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.5.1 --output_format html, pdf, txt --define DL-LQC=1 --nopower --runmode rate --tune base:peak
--size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6526Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-31
physical id 1: apicids 128-159
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6526Y
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 2
BogoMIPS: 5600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 480

## PowerEdge R760xa (Intel Xeon Gold 6526Y)

## SPECrate®2017\_fp\_peak = 494

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Dec-2023  
**Hardware Availability:** Dec-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities
```

```
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 75 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
node 0 size: 515339 MB
node 0 free: 513089 MB
node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
node 1 size: 515705 MB
node 1 free: 506100 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1055789544 kB
```

10. who -r

```
run-level 3 Dec 28 13:22
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd udisks2
upower
indirect wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=825c10fd-7ec5-4674-a94f-b7ae4890083d
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=319M,high
crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4  
-----

-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 60G 4.1G 56G 7% /mnt/ramdisk  
-----

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R760xa  
Product Family: PowerEdge  
Serial: 1234567  
-----

-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600, configured at 5200  
-----

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 2.0.0  
BIOS Date: 11/23/2023  
BIOS Revision: 2.0  
-----

## Compiler Version Notes

-----  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Dec-2023  
Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 480

PowerEdge R760xa (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 494

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

511.povray\_r (continued):

```
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-28 04:46:26-0500.

Report generated on 2024-02-28 19:15:02 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.