



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix


SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

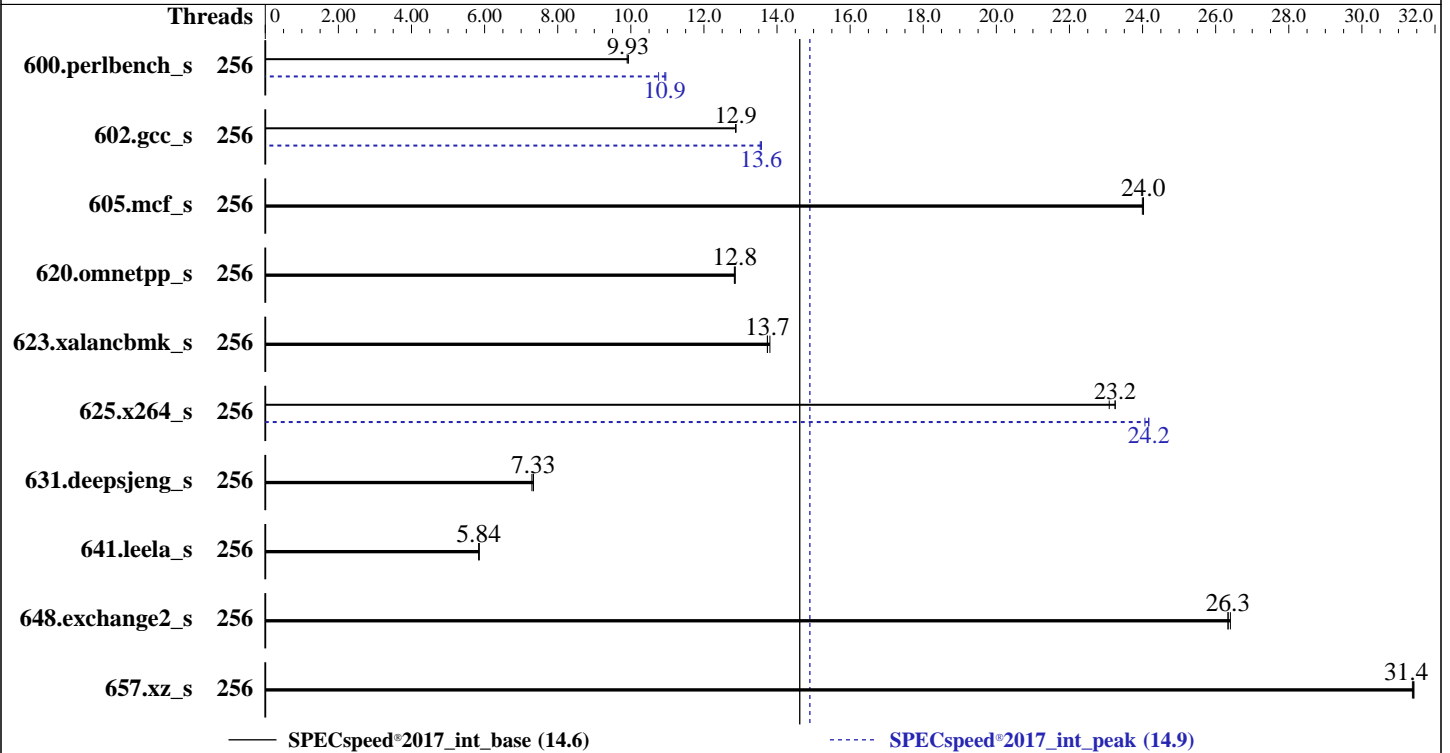

Hardware

CPU Name: Intel Xeon Platinum 8592+
Max MHz: 3900
Nominal: 1900
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 320 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage: 1 x 10 TB SATA HDD (7200 rpm)
Other: CPU Cooling: Air

Software

OS: openSUSE Leap 15.5
5.14.21-150500.53-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Nettrix BIOS Version NNH1041261 released Dec-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECSpeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECSpeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	179	9.90	<u>179</u>	<u>9.93</u>	179	9.93	256	165	10.8	<u>162</u>	<u>10.9</u>	162	11.0
602.gcc_s	256	<u>309</u>	<u>12.9</u>	309	12.9	309	12.9	256	294	13.5	293	13.6	<u>294</u>	<u>13.6</u>
605.mcf_s	256	197	24.0	196	24.0	<u>197</u>	<u>24.0</u>	256	197	24.0	196	24.0	<u>197</u>	<u>24.0</u>
620.omnetpp_s	256	<u>127</u>	<u>12.8</u>	127	12.9	127	12.8	256	<u>127</u>	<u>12.8</u>	127	12.9	127	12.8
623.xalancbmk_s	256	103	13.8	<u>103</u>	<u>13.7</u>	103	13.7	256	103	13.8	<u>103</u>	<u>13.7</u>	103	13.7
625.x264_s	256	75.9	23.3	76.4	23.1	<u>75.9</u>	<u>23.2</u>	256	73.0	24.2	<u>73.0</u>	<u>24.2</u>	73.3	24.1
631.deepsjeng_s	256	<u>195</u>	<u>7.33</u>	196	7.29	195	7.34	256	<u>195</u>	<u>7.33</u>	196	7.29	195	7.34
641.leela_s	256	291	5.85	292	5.84	<u>292</u>	<u>5.84</u>	256	291	5.85	292	5.84	<u>292</u>	<u>5.84</u>
648.exchange2_s	256	111	26.4	112	26.3	<u>112</u>	<u>26.3</u>	256	111	26.4	112	26.3	<u>112</u>	<u>26.3</u>
657.xz_s	256	197	31.4	197	31.4	<u>197</u>	<u>31.4</u>	256	197	31.4	197	31.4	<u>197</u>	<u>31.4</u>

SPECSpeed®2017_int_base = **14.6**

SPECSpeed®2017_int_peak = **14.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu_2024_1/lib/intel64:/home/SPECcpu_2024_1/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes

BIOS Configuration:

SNC (Sub NUMA) set to Enable SNC2 (2-clusters)
Patrol Scrub set to Disabled
DCU Streamer Prefetcher set to Enabled
Enable LP [Global] set to ALL LPs

Sysinfo program /home/SPECcpu_2024_1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Nov 21 00:06:07 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
00:06:07 up 3:27, 2 users, load average: 0.31, 3.59, 3.13
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 10.32.4.15 20:44 3:18m 1.01s 0.15s -bash
root pts/1 10.32.4.15 20:45 3:18m 0.10s 0.10s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size (blocks, -c) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 4126323
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 4126323
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0,pts/1
-bash
sh ww-speed-test.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base,peak --output_format all
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.041/templogs/preenv.intspeed.041.0.log
  --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/SPECcpu_2024_1

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000170
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 64
siblings       : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

Address sizes:          52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) PLATINUM 8592+
CPU family:            6
Model:                 207
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
Stepping:              2
CPU max MHz:           3900.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-31,128-159
NUMA node1 CPU(s):    32-63,160-191
NUMA node2 CPU(s):    64-95,192-223
NUMA node3 CPU(s):    96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE
L1d    48K      6M   12 Data          1       64      1           64
L1i    32K      4M    8 Instruction    1       64      1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

L2	2M	256M	16 Unified	2	2048	1	64
L3	320M	640M	20 Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 257624 MB
node 0 free: 255153 MB
node 1 cpus: 32-63,160-191
node 1 size: 258031 MB
node 1 free: 257471 MB
node 2 cpus: 64-95,192-223
node 2 size: 258031 MB
node 2 free: 251522 MB
node 3 cpus: 96-127,224-255
node 3 size: 257922 MB
node 3 free: 256976 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056369640 kB

10. who -r

run-level 3 Nov 20 20:39

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* smartd.service loaded failed failed Self Monitoring and Reporting Technology (SMART) Daemon

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron cups display-manager getty@
                haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix
                purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm
                grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kdump kdump-early
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                vncserver@
indirect       wickedd

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=6a1519a2-3e29-4588-989b-2ae1420cf2df
splash=silent
resume=/dev/disk/by-uuid/643aff63-94e3-47ad-b49c-c4f7f09a01af
mitigations=auto
quiet
security=apparmor

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

20. OS release
From /etc/*-release /etc/*-version
os-release opensUSE Leap 15.5

21. Disk information
SPEC is set to: /home/SPECcpu_2024_1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb3 xfs 8.6T 189G 8.5T 3% /home

22. /sys/devices/virtual/dmi/id
Vendor: Nettrix
Product: R620 G50
Product Family: Rack
Serial: 6101810603446688

23. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0PB0-CWXXH 64 GB 2 rank 5600

24. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041261
BIOS Date: 12/13/2023
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Compiler Version Notes (Continued)

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Nov-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017_int_base = 14.6

R620 G50 (Intel Xeon Platinum 8592+, 1.90 GHz)

SPECspeed®2017_int_peak = 14.9

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Nov-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-20 11:06:06-0500.

Report generated on 2024-12-18 18:19:32 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-17.