



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

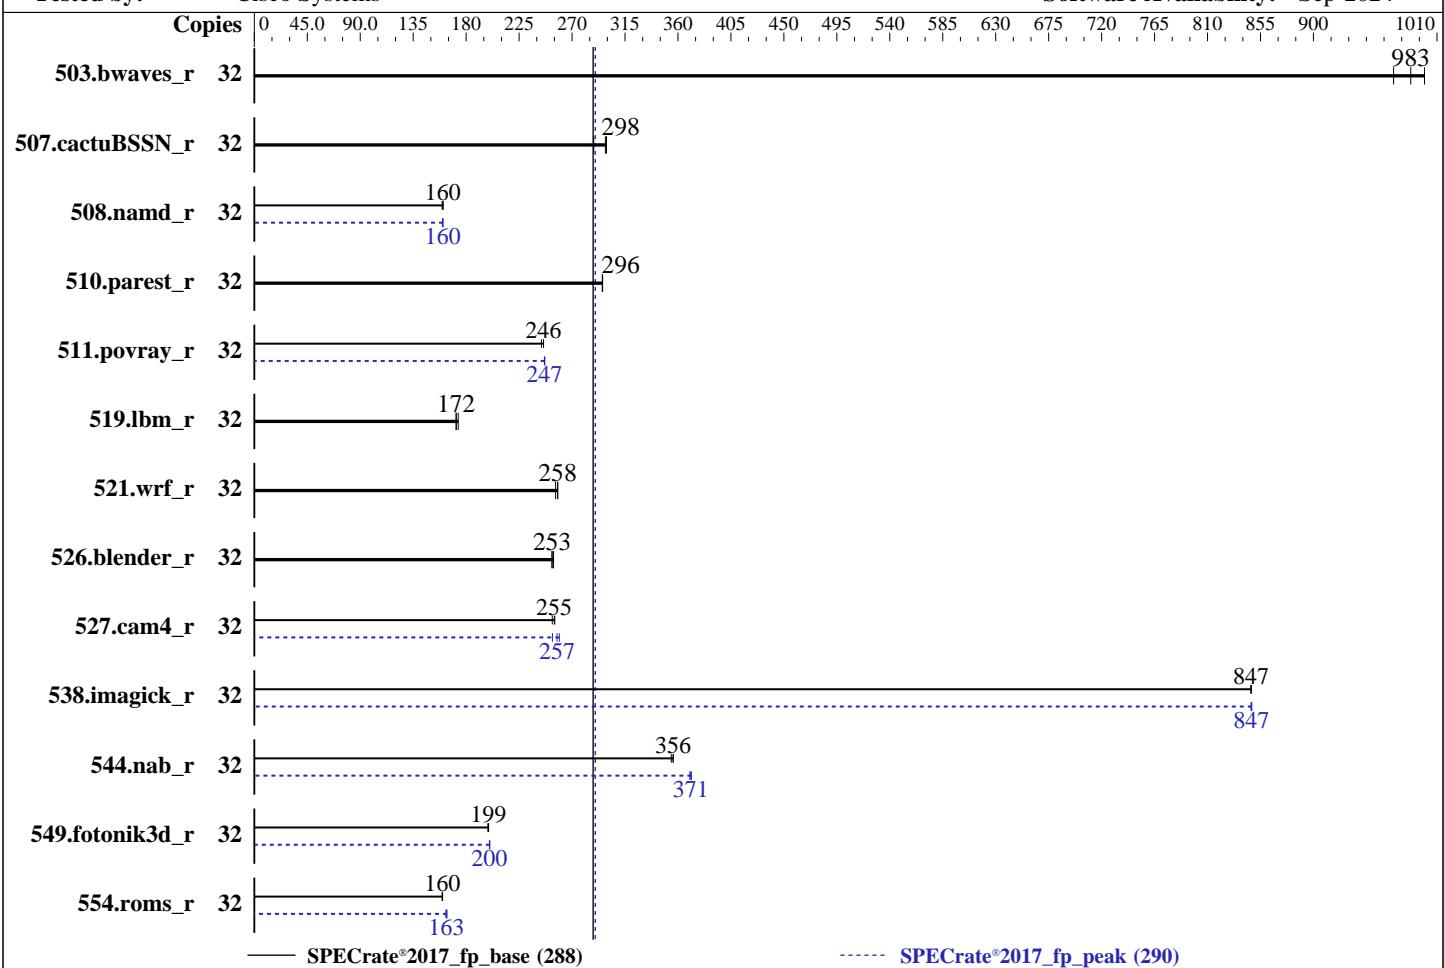

Hardware

CPU Name: AMD EPYC 9174F
 Max MHz: 4400
 Nominal: 4100
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 240 GB M.2 SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 kernel version 6.4.0-150600.21-default
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 4.3.6 released Oct-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	327	983	323	994	331	968	32	327	983	323	994	331	968		
507.cactusBSSN_r	32	140	288	136	298	135	299	32	140	288	136	298	135	299		
508.namd_r	32	189	160	190	160	190	160	32	190	160	190	160	190	160		
510.parest_r	32	283	296	283	296	283	296	32	283	296	283	296	283	296		
511.povray_r	32	306	244	304	246	304	246	32	303	247	303	247	303	247		
519.lbm_r	32	195	173	197	171	197	172	32	195	173	197	171	197	172		
521.wrf_r	32	278	258	280	256	278	258	32	278	258	280	256	278	258		
526.blender_r	32	193	253	193	253	192	254	32	193	253	193	253	192	254		
527.cam4_r	32	220	255	221	253	219	255	32	221	253	218	257	216	259		
538.imagick_r	32	94.0	847	93.9	847	94.0	847	32	94.0	847	93.9	848	93.9	847		
544.nab_r	32	152	354	151	356	151	356	32	145	371	145	371	146	370		
549.fotonik3d_r	32	627	199	626	199	628	199	32	623	200	624	200	624	200		
554.roms_r	32	318	160	318	160	318	160	32	311	163	312	163	311	164		

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4
Determinism Slider set to Power
DF C-States set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Feb 4 02:52:45 2025
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Platform Notes (Continued)

```
15. sysctl  
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS
```

```
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w  
02:52:45 up 1 min, 1 user, load average: 0.17, 0.10, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 02:52 21.00s 0.98s 0.07s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username  
From environment variable $USER: root
```

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 3094869  
max locked memory       (kbytes, -l) 2097152  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 3094869  
virtual memory          (kbytes, -v) unlimited  
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
login -- root  
-bash  
python3 ./run_amd_rate_aocc500_znver5_A1.py -b fprate  
/bin/bash ./amd_rate_aocc500_znver5_A1.sh  
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate  
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Platform Notes (Continued)

```
model name      : AMD EPYC 9174F 16-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101148
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 16
siblings         : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 32
On-line CPU(s) list:    0-31
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9174F 16-Core Processor
BIOS Model name:        AMD EPYC 9174F 16-Core Processor
BIOS CPU family:        Unknown CPU @ 4.1GHz
CPU family:              25
Model:                  17
Thread(s) per core:     2
Core(s) per socket:      16
Socket(s):              1
Stepping:                1
Frequency boost:        enabled
CPU(s) scaling MHz:     94%
CPU max MHz:            4408.2998
CPU min MHz:            1500.0000
BogoMIPS:                8187.74
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skininit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsfsbase bml1 avx2 smep bml2
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cq_mllc cq_moccup_llc cq_mmbm_total cq_mmbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```

avx512_vpopcndq la57 rdpid overflow_recov succor smca flush_l1d
debug_swap
AMD-V

Virtualization:
L1d cache: 512 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Llftf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 193232 MB
node 0 free: 192772 MB
node 1 cpus: 4-7,20-23
node 1 size: 193495 MB
node 1 free: 193080 MB
node 2 cpus: 8-11,24-27
node 2 size: 193533 MB
node 2 free: 193108 MB
node 3 cpus: 12-15,28-31
node 3 size: 193483 MB
node 3 free: 193044 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10

```

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Platform Notes (Continued)

MemTotal: 792314784 kB

10. who -r
run-level 3 Feb 4 02:51

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore virtqemud wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievrd iscsi-init iscsid
issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
munge nfs nfs-blkmap nfs-server rpcbind rpmconfigcheck rsyncd salt-minion
serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter
svnserve systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2
virtinterfaced virtlockd virtlogd virtnetworkd virtnodeudev virtnwfilterd virtsecretd
virtstoraged yplibd
indirect pcsd systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=62bf82ca-659e-4401-8eca-cbfb4d3e5700
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 14:
current policy: frequency should be within 1.50 GHz and 4.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Platform Notes (Continued)

```
vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode              1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs    60000
    defrag                   1
    max_ptes_none            511
    max_ptes_shared           256
    max_ptes_swap              64
    pages_to_scan             4096
    scan_sleep_millisecs      10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda2        btrfs  222G  8.1G  210G  4%  /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Cisco Systems Inc
    Product:         UCSC-C225-M8S
    Serial:          WZP28199HWN

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        12x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      Cisco Systems, Inc.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Platform Notes (Continued)

BIOS Version: C225M8.4.3.6.94.1011241558
BIOS Date: 10/11/2024
BIOS Revision: 5.27

Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----



=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----



=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----



=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----



=====
Fortran      | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactubssn_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Base Portability Flags (Continued)

```
526.blender_r: -funsigned-char -DSPEC_LP64  
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

```
538.imagick_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

```
510.parest_r: basepeak = yes
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

554.roms_r (continued):

-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactusBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9174F 16-Core Processor)

SPECrate®2017_fp_base = 288

SPECrate®2017_fp_peak = 290

CPU2017 License: 9019

Test Date: Jan-2025

Test Sponsor: Cisco Systems

Hardware Availability: Nov-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-04 02:52:45-0500.

Report generated on 2025-02-25 19:05:38 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.