



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

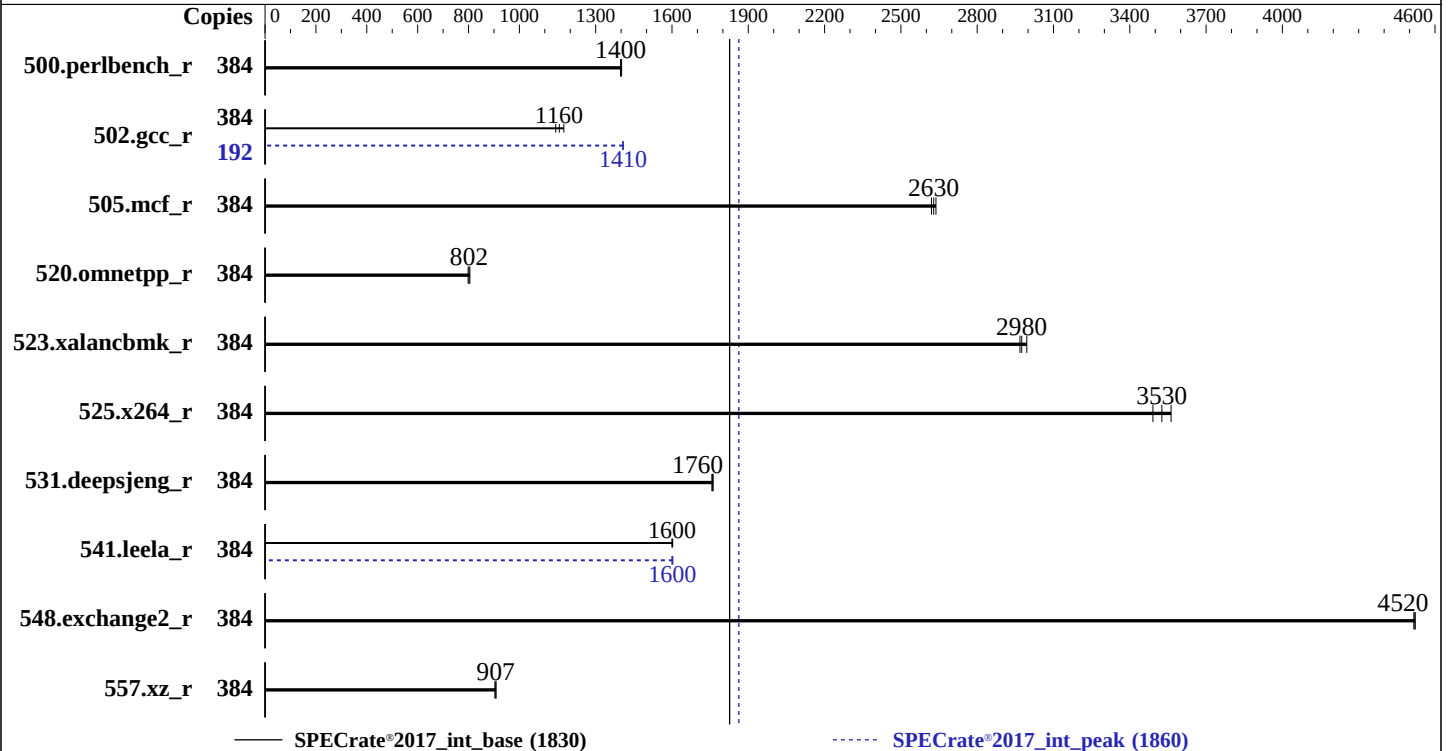

Hardware

CPU Name: AMD EPYC 9654
Max MHz: 3700
Nominal: 2400
Enabled: 192 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 3.84TB SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
kernel version 6.8.0-41-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 6.30.39 released May-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	436	1400	437	1400	<u>437</u>	<u>1400</u>	384	436	1400	437	1400	<u>437</u>	<u>1400</u>
502.gcc_r	384	<u>470</u>	<u>1160</u>	463	1170	476	1140	<u>192</u>	<u>193</u>	<u>1410</u>	193	1410	193	1410
505.mcf_r	384	237	2620	<u>236</u>	<u>2630</u>	235	2640	<u>384</u>	<u>237</u>	<u>2620</u>	<u>236</u>	<u>2630</u>	235	2640
520.omnetpp_r	384	626	805	631	798	<u>628</u>	<u>802</u>	<u>384</u>	<u>626</u>	<u>805</u>	631	798	<u>628</u>	<u>802</u>
523.xalancbmk_r	384	<u>136</u>	<u>2980</u>	135	3000	137	2970	<u>384</u>	<u>136</u>	<u>2980</u>	135	3000	137	2970
525.x264_r	384	<u>191</u>	<u>3530</u>	193	3490	189	3560	<u>384</u>	<u>191</u>	<u>3530</u>	193	3490	189	3560
531.deepsjeng_r	384	251	1760	250	1760	<u>250</u>	<u>1760</u>	<u>384</u>	<u>251</u>	<u>1760</u>	250	1760	<u>250</u>	<u>1760</u>
541.leela_r	384	397	1600	<u>397</u>	<u>1600</u>	397	1600	<u>384</u>	<u>397</u>	<u>1600</u>	397	1600	397	1600
548.exchange2_r	384	222	4520	<u>223</u>	<u>4520</u>	223	4520	<u>384</u>	<u>222</u>	<u>4520</u>	<u>223</u>	<u>4520</u>	223	4520
557.xz_r	384	459	904	<u>457</u>	<u>907</u>	457	908	<u>384</u>	<u>459</u>	<u>904</u>	<u>457</u>	<u>907</u>	457	908

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32:/usr/lib:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Control set to Enabled

SVM Mode set to Disabled

Power Profile Selection set to High Performance Mode

Determinism Slider set to Power

cTDP set to 400

PPT set to 400

NUMA nodes per socket set to NPS 4

L3 cache as NUMA domain set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on h3c Sat Jul 26 12:25:01 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux h3c 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug 2 20:41:06 UTC 2024 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
12:25:01 up 9 min, 2 users, load average: 0.47, 4.88, 5.35
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      172.17.21.35 12:24        8:00    0.00s  0.14s  sshd: root@pts/0
root      172.17.21.35 12:24        8:00    0.00s  0.05s  sshd: root@notty
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093576
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.004/temlogs/preenv.intrate.004.0.log --lognum 004.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
stepping      : 1
microcode     : 0xa101154
bugs          : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores     : 96
siblings      : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9654 96-Core Processor
BIOS Model name:       AMD EPYC 9654 96-Core Processor
BIOS CPU family:       107
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    100%
CPU max MHz:           3709.0000
CPU min MHz:           400.0000
BogoMIPS:              4788.82
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                    amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                    flushbyasid decodeassists pausefilter pfthreshold avic
                    v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                    debug_swap
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

L1d cache: 6 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 24
NUMA node0 CPU(s): 0-7,192-199
NUMA node1 CPU(s): 8-15,200-207
NUMA node2 CPU(s): 16-23,208-215
NUMA node3 CPU(s): 24-31,216-223
NUMA node4 CPU(s): 32-39,224-231
NUMA node5 CPU(s): 40-47,232-239
NUMA node6 CPU(s): 48-55,240-247
NUMA node7 CPU(s): 56-63,248-255
NUMA node8 CPU(s): 64-71,256-263
NUMA node9 CPU(s): 72-79,264-271
NUMA node10 CPU(s): 80-87,272-279
NUMA node11 CPU(s): 88-95,280-287
NUMA node12 CPU(s): 96-103,288-295
NUMA node13 CPU(s): 104-111,296-303
NUMA node14 CPU(s): 112-119,304-311
NUMA node15 CPU(s): 120-127,312-319
NUMA node16 CPU(s): 128-135,320-327
NUMA node17 CPU(s): 136-143,328-335
NUMA node18 CPU(s): 144-151,336-343
NUMA node19 CPU(s): 152-159,344-351
NUMA node20 CPU(s): 160-167,352-359
NUMA node21 CPU(s): 168-175,360-367
NUMA node22 CPU(s): 176-183,368-375
NUMA node23 CPU(s): 184-191,376-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)
node 0 cpus: 0-7,192-199
node 0 size: 31815 MB
node 0 free: 31201 MB
node 1 cpus: 8-15,200-207

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

node 1 size: 32250 MB
node 1 free: 31950 MB
node 2 cpus: 16-23,208-215
node 2 size: 32250 MB
node 2 free: 32015 MB
node 3 cpus: 24-31,216-223
node 3 size: 32250 MB
node 3 free: 32008 MB
node 4 cpus: 32-39,224-231
node 4 size: 32250 MB
node 4 free: 32001 MB
node 5 cpus: 40-47,232-239
node 5 size: 32250 MB
node 5 free: 32023 MB
node 6 cpus: 48-55,240-247
node 6 size: 32250 MB
node 6 free: 31471 MB
node 7 cpus: 56-63,248-255
node 7 size: 32250 MB
node 7 free: 32024 MB
node 8 cpus: 64-71,256-263
node 8 size: 32250 MB
node 8 free: 32025 MB
node 9 cpus: 72-79,264-271
node 9 size: 32250 MB
node 9 free: 32027 MB
node 10 cpus: 80-87,272-279
node 10 size: 32250 MB
node 10 free: 31996 MB
node 11 cpus: 88-95,280-287
node 11 size: 32250 MB
node 11 free: 31985 MB
node 12 cpus: 96-103,288-295
node 12 size: 32250 MB
node 12 free: 31993 MB
node 13 cpus: 104-111,296-303
node 13 size: 32250 MB
node 13 free: 32017 MB
node 14 cpus: 112-119,304-311
node 14 size: 32207 MB
node 14 free: 31973 MB
node 15 cpus: 120-127,312-319
node 15 size: 32250 MB
node 15 free: 32020 MB
node 16 cpus: 128-135,320-327
node 16 size: 32250 MB
node 16 free: 32024 MB
node 17 cpus: 136-143,328-335
node 17 size: 32250 MB
node 17 free: 32001 MB
node 18 cpus: 144-151,336-343
node 18 size: 32250 MB
node 18 free: 32027 MB
node 19 cpus: 152-159,344-351
node 19 size: 32250 MB
node 19 free: 32013 MB
node 20 cpus: 160-167,352-359
node 20 size: 32250 MB
node 20 free: 32043 MB
node 21 cpus: 168-175,360-367

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

node 21 size: 32250 MB
node 21 free: 32027 MB
node 22 cpus: 176-183,368-375
node 22 size: 32250 MB
node 22 free: 31942 MB
node 23 cpus: 184-191,376-383
node 23 size: 32189 MB
node 23 free: 31915 MB
node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
0:	0	11	11	12	12	12	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
1:	11	0	11	12	12	12	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
2:	11	11	0	12	12	12	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
3:	12	12	12	0	11	11	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
4:	12	12	12	11	0	11	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
5:	12	12	12	11	11	0	12	12	12	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
6:	12	12	12	12	12	12	0	11	11	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
7:	12	12	12	12	12	12	11	0	11	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
8:	12	12	12	12	12	12	11	11	0	12	12	12	12	22	22	22	22	22	22	22	22	22	22	22
9:	12	12	12	12	12	12	12	12	10	0	11	11	12	22	22	22	22	22	22	22	22	22	22	22
10:	12	12	12	12	12	12	12	12	11	10	0	11	12	22	22	22	22	22	22	22	22	22	22	22
11:	12	12	12	12	12	12	12	12	11	11	10	0	12	22	22	22	22	22	22	22	22	22	22	22
12:	22	22	22	22	22	22	22	22	22	22	22	10	0	11	11	12	12	12	12	12	12	12	12	12
13:	22	22	22	22	22	22	22	22	22	22	22	11	10	0	11	12	12	12	12	12	12	12	12	12
14:	22	22	22	22	22	22	22	22	22	22	22	11	11	10	0	12	12	12	12	12	12	12	12	12
15:	22	22	22	22	22	22	22	22	22	22	22	12	12	10	11	0	11	12	12	12	12	12	12	12
16:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	11	10	0	11	12	12	12	12	12	12
17:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	11	11	10	0	12	12	12	12	12	12
18:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	10	11	0	11	12	12	12	12
19:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	12	11	10	0	11	12	12	12
20:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	12	11	11	10	0	12	12	12
21:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	12	12	12	10	11	0	12	12
22:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	12	12	12	12	11	10	0	12
23:	22	22	22	22	22	22	22	22	22	22	22	12	12	12	12	12	12	12	12	12	11	11	10	0

9. /proc/meminfo
MemTotal: 792034480 kB

10. who -r
run-level 3 Jul 26 12:19

11. systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
1 loaded units listed.

13. Services, from systemctl list-unit-files
STATE UNIT FILES

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lvm2-monitor mariadb multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb snapd systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmiev d iscsid mariadb@ rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex t systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	cpufrequtils loadcpufreq openipmi
indirect	systemd-sysupdate systemd-sysupdate-reboot
masked	cryptdisks cryptdisks-early hwclock multipath-tools-boot sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-6.8.0-41-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
iommu=pt
amd_pstate=passive
```

15. cpupower frequency-info

```
analyzing CPU 277:
  current policy: frequency should be within 400 MHz and 3.71 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4 3.5T 154G 3.2T 5% /

21. /sys/devices/virtual/dmi/id
Vendor: New H3C Technologies Co., Ltd.
Product: H3C UniServer R4950 G7
Product Family: Rack
Serial: 210235A55C0123456715

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x SK Hynix HMC88AEBRA107N 32 GB 2 rank 4800
8x SK Hynix HMC88AEBRA115N 32 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.30.39
BIOS Date: 05/22/2025
BIOS Revision: 5.27

Compiler Version Notes

=====

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 502.gcc_r(peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
Fortran | 548.exchange2_r(base, peak)
```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flt0
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fvecLib=AMDLibm
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fvecLib=AMDLibm -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9654

SPECrate®2017_int_base = 1830

SPECrate®2017_int_peak = 1860

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

541.leela_r (continued):

-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-26 08:25:00-0400.

Report generated on 2025-08-12 15:49:00 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-12.