



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

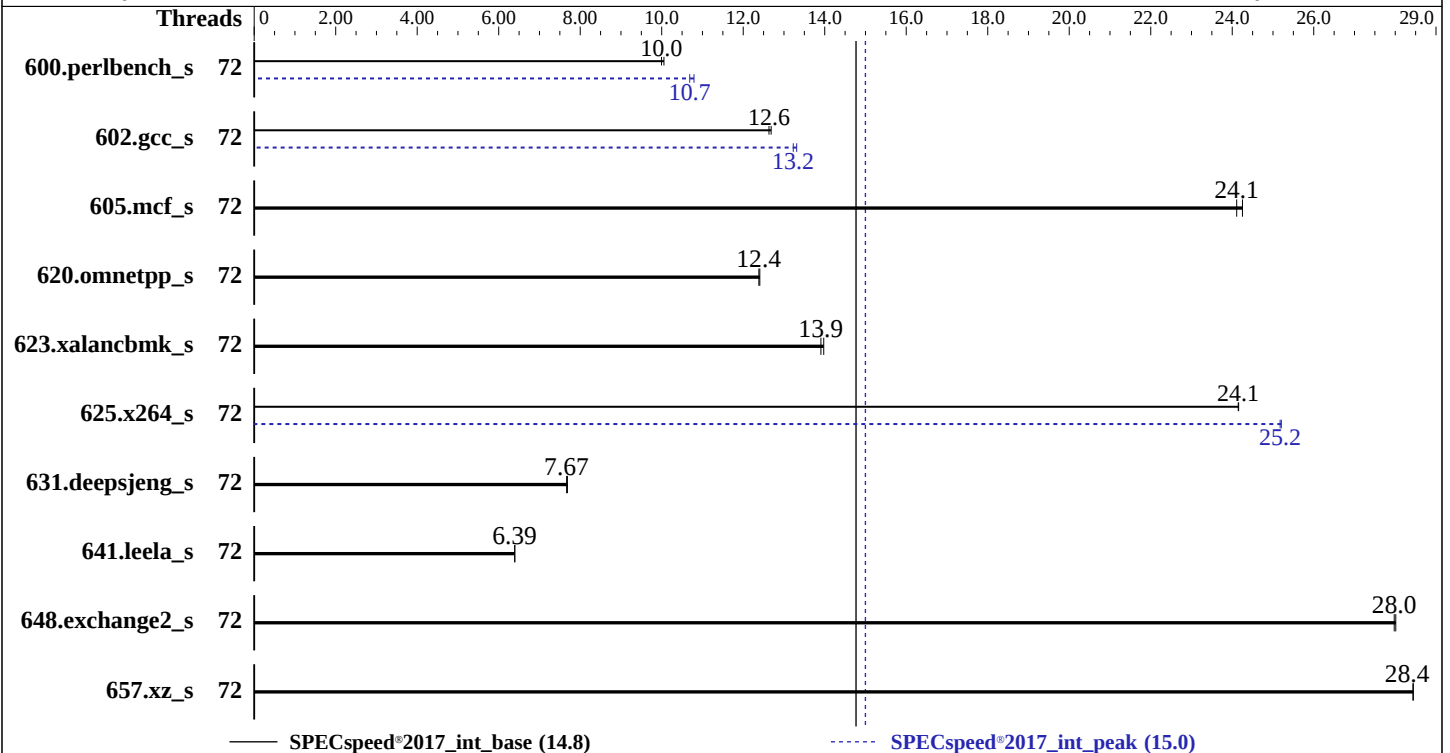

Hardware

CPU Name: Intel Xeon 6736P
Max MHz: 4100
Nominal: 2000
Enabled: 72 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 144 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 60 GB on tmpfs
Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.3.2 released May-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECSpeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	72	177	10.1	<u>178</u>	<u>10.0</u>			72	164	10.8	<u>166</u>	<u>10.7</u>		
602.gcc_s	72	<u>315</u>	<u>12.6</u>	314	12.7			72	<u>301</u>	<u>13.2</u>	299	13.3		
605.mcf_s	72	<u>196</u>	<u>24.1</u>	195	24.3			72	<u>196</u>	<u>24.1</u>	195	24.3		
620.omnetpp_s	72	<u>132</u>	<u>12.4</u>	131	12.4			72	<u>132</u>	<u>12.4</u>	131	12.4		
623.xalancbmk_s	72	101	14.0	<u>102</u>	<u>13.9</u>			72	101	14.0	<u>102</u>	<u>13.9</u>		
625.x264_s	72	73.0	24.2	<u>73.1</u>	<u>24.1</u>			72	70.0	25.2	<u>70.1</u>	<u>25.2</u>		
631.deepsjeng_s	72	<u>187</u>	<u>7.67</u>	186	7.69			72	<u>187</u>	<u>7.67</u>	186	7.69		
641.leela_s	72	<u>267</u>	<u>6.39</u>	267	6.40			72	<u>267</u>	<u>6.39</u>	267	6.40		
648.exchange2_s	72	<u>105</u>	<u>28.0</u>	105	28.0			72	<u>105</u>	<u>28.0</u>	105	28.0		
657.xz_s	72	<u>217</u>	<u>28.4</u>	217	28.4			72	<u>217</u>	<u>28.4</u>	217	28.4		

SPECSpeed®2017_int_base = 14.8

SPECSpeed®2017_int_peak = 15.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

Adjacent Cache Line Prefetch : Disabled

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Sub NUMA Cluster : Enabled
MADT Core Enumeration : Linear
LLC Prefetch : Enabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
C1E : Disabled
C-States : Autonomous
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
CPU Interconnect Bus -
Link Power Management : Disabled
PCI ASPM L1 Link Power Management : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R770 Tue Jun 24 09:55:04 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux 1234567-R770 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
09:55:04 up 4 min, 1 user, load average: 0.13, 0.29, 0.16
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
root      tty1      -                09:51  39.00s  0.74s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.3 --output_format html,pdf,txt
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126776
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126776
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.3 --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.3 --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=72 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --define DL-VERS=6.3 --output_format html,pdf,txt
intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=72 --tune base,peak --output_format all
--define intsppedaffinity --define drop_caches --iterations 2 --define DL-VERS=6.3 --output_format
html,pdf,txt --nopower --runmode speed --tune base:peak --size refspped intspped --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspped.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6736P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003c2
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 36
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

siblings : 36
2 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-35
physical id 1: core ids 0-35
physical id 0: apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70
physical id 1: apicids
128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	72
On-line CPU(s) list:	0-71
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel
Model name:	Intel(R) Xeon(R) 6736P
BIOS Model name:	Intel(R) Xeon(R) 6736P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	1
Core(s) per socket:	36
Socket(s):	2
Stepping:	1
BogoMIPS:	4000.00
Flags:	fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat pse36_clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx pdpe1gb_rdtscp_lm_constant_tsc_art_arch_perfmon_pebs_bts_rep_good nopl_xtopology_nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni pclmulqdq_dtes64_monitor_ds_cpl_vmx_smx_est_tm2_ssse3_sdbg_fma_cx16 xtpr_pdc_m_pcid_dca_sse4_1_sse4_2_x2apic_movbe_popcnt tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm_abm 3dnowprefetch_cpuid_fault_epb_cat_l3_cat_l2_cdp_l3_intel_ppin_cdp_l2 ssbd_mba_ibrs_ibpb_stibp_ibrs_enhanced_tpr_shadow_flexpriority_ept vpid_ept_ad_fsgsbase_tsc_adjust_bmi1_hle_avx2_smp_bmi2_erms_invpcid rtm_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap_avx512ifma_clflushopt clwb_intel_pt_avx512cd_sha_ni_avx512bw_avx512vl_xsaveopt_xsavec xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total_cqm_mbm_local split_lock_detect_user_shstk_avx_vnni_avx512_bf16_wbnoinvd_dtherm_ida arat_pln_pts_hfi_vnmi_avx512vbmi_umip_pku_ospke_waitpkg_avx512_vbmi2 gfni_vaes_vpclmulqdq_avx512_vnni_avx512_bitalg_tme_avx512_vpopcntdq la57_rdpid_bus_lock_detect_cldemote_movdiri_movdir64b_enqcmd_fsrn md_clear_serialize_tsxldtrk_pconfig_arch_lbr_ibt_amx_bf16_avx512_fp16 amx_tile_amx_int8_flush_l1d_arch_capabilities
Virtualization:	VT-x
L1d cache:	3.4 MiB (72 instances)
L1i cache:	4.5 MiB (72 instances)
L2 cache:	144 MiB (72 instances)
L3 cache:	288 MiB (2 instances)
NUMA node(s):	2

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

NUMA node0 CPU(s): 0-35
NUMA node1 CPU(s): 36-71
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	64K	4.5M	16	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-35
node 0 size: 515660 MB
node 0 free: 514531 MB
node 1 cpus: 36-71
node 1 size: 516064 MB
node 1 free: 503887 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1056486324 kB

10. who -r

run-level 3 Jun 24 09:51

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings klogd lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

enabled-runtime wickedd-dhcp6 wickedd-nanny wpa_supplicant
disabled systemd-remount-fs
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
ebtables exchange-bmc-os-info fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev
issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap
nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=1d10f0af-4b17-4d18-ba8a-bacfa841f6e
splash=silent
resume=/dev/disk/by-uuid/f8ac12e2-ca56-4f3b-a824-95169c852a50
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 1:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

16. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	60G	5.0G	56G	9%	/mnt/ramdisk

20. /sys/devices/virtual/dmi/id

```
Vendor: Dell Inc.
Product: PowerEdge R770
Product Family: PowerEdge
Serial: 1234567
```

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x 002C069D002C MTC40F2046S1RC64BD1 USFF 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Dell Inc.
BIOS Version: 1.3.2
BIOS Date: 05/15/2025
BIOS Revision: 1.3
```

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
      | 657.xz_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
      | 641.leela_s(base, peak)  
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapfirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.8

PowerEdge R770 (Intel Xeon 6736P)

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

602.gcc_s (continued):

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-24 09:55:03-0400.

Report generated on 2025-08-12 15:49:37 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-12.