



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

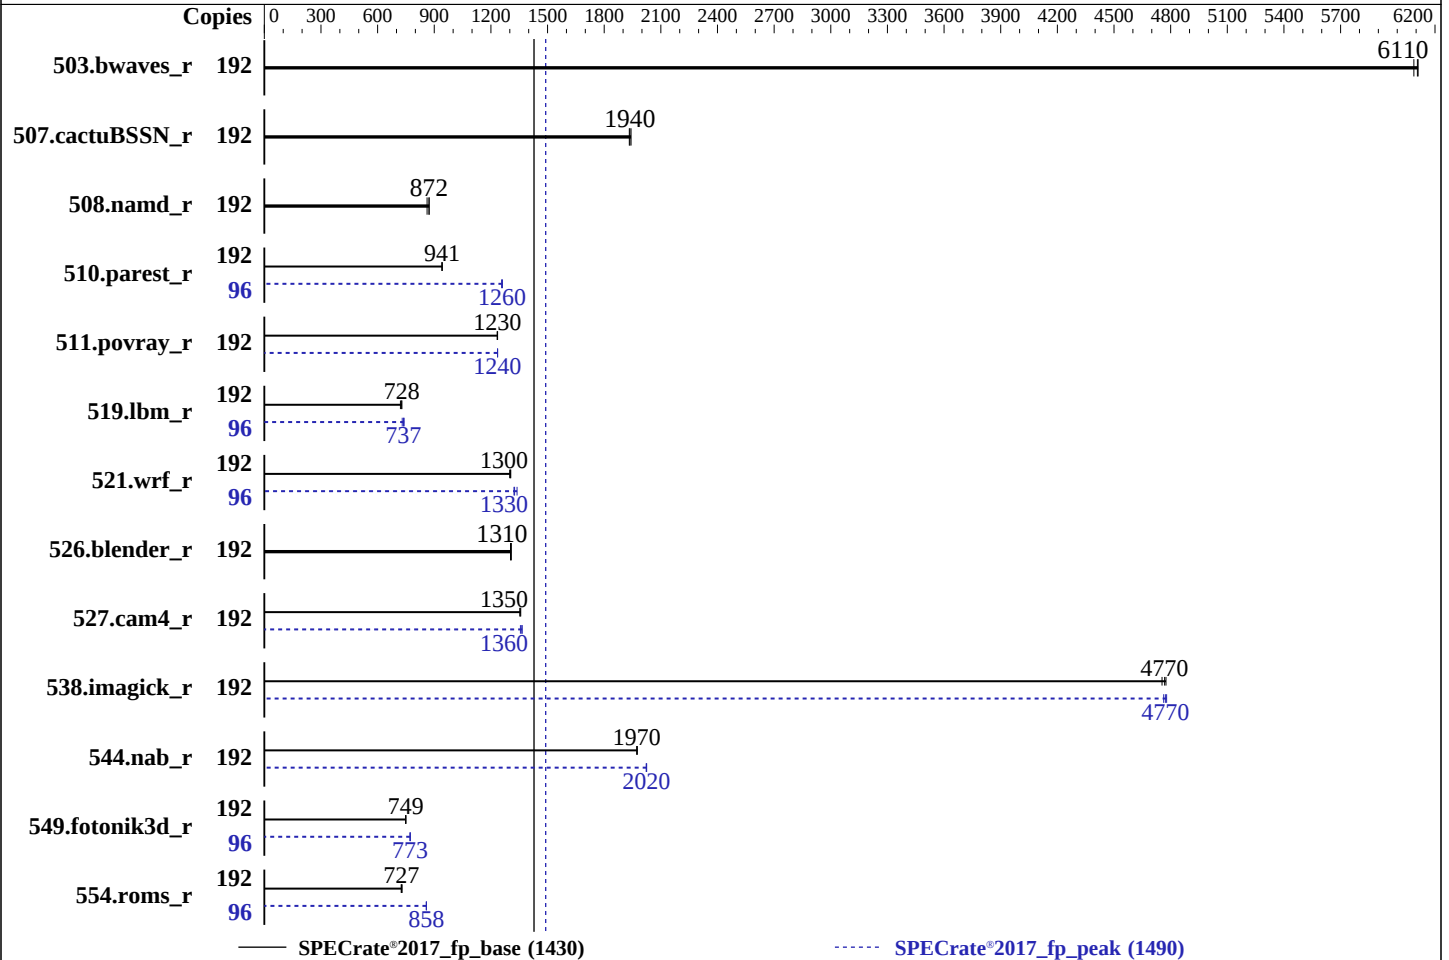

Hardware

CPU Name: AMD EPYC 9455
Max MHz: 4400
Nominal: 3150
Enabled: 96 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 960 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
Kernel 6.8.0-86-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 3.5 released Mar-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	<u>315</u>	<u>6110</u>	316	6090	315	6110	192	<u>315</u>	<u>6110</u>	316	6090	315	6110
507.cactuBSSN_r	192	126	1930	125	1940	<u>126</u>	<u>1940</u>	192	126	1930	125	1940	<u>126</u>	<u>1940</u>
508.namd_r	192	212	862	209	873	<u>209</u>	<u>872</u>	192	212	862	209	873	<u>209</u>	<u>872</u>
510.parest_r	192	533	942	534	941	<u>534</u>	<u>941</u>	96	199	1260	200	1260	<u>199</u>	<u>1260</u>
511.povray_r	192	363	1230	<u>363</u>	<u>1230</u>	363	1240	192	363	1230	363	1240	<u>363</u>	<u>1240</u>
519.lbm_r	192	<u>278</u>	<u>728</u>	278	728	281	721	96	139	730	137	740	<u>137</u>	<u>737</u>
521.wrf_r	192	330	1310	331	1300	<u>330</u>	<u>1300</u>	96	161	1340	163	1320	<u>162</u>	<u>1330</u>
526.blender_r	192	224	1310	224	1300	<u>224</u>	<u>1310</u>	192	224	1310	224	1300	<u>224</u>	<u>1310</u>
527.cam4_r	192	<u>248</u>	<u>1350</u>	247	1360	248	1350	192	248	1360	246	1370	<u>246</u>	<u>1360</u>
538.imagick_r	192	<u>100</u>	<u>4770</u>	100	4780	100	4750	192	99.9	4780	100	4760	<u>100</u>	<u>4770</u>
544.nab_r	192	164	1970	<u>164</u>	<u>1970</u>	164	1980	192	160	2020	<u>160</u>	<u>2020</u>	160	2020
549.fotonik3d_r	192	998	750	<u>999</u>	<u>749</u>	1000	748	96	484	773	<u>484</u>	<u>773</u>	485	772
554.roms_r	192	<u>420</u>	<u>727</u>	418	730	421	725	96	178	858	178	859	<u>178</u>	<u>858</u>

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH, AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 300
Package Power Limit Control = Manual
Package Power Limit = 300
Memory Target Speed = DDR6400
DRAM Scrub Time = Disabled
TSME = Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-1125hs-tnr-9455 Tue Oct 28 12:00:09 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.11)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux as-1125hs-tnr-9455 6.8.0-86-generic #87-Ubuntu SMP PREEMPT_DYNAMIC Mon Sep 22 18:03:36 UTC 2025
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
12:00:09 up 4:38, 1 user, load average: 130.19, 176.68, 185.26
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
amd   tty1    -             07:23    4:32m  0.35s  0.33s  sudo su -
```

```
3. Username
From environment variable $USER: root
From the command 'logname': amd
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093860
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Platform Notes (Continued)

```
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9455 48-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002147
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 48
siblings        : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 1:  core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0:  apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123
physical id 1:  apicids 128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9455 48-Core Processor
BIOS Model name:        AMD EPYC 9455 48-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     48
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:     100%
CPU max MHz:            3150.0000
CPU min MHz:            1500.0000
BogoMIPS:               6299.56
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
```

Unknown CPU @ 3.1GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH, AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Platform Notes (Continued)

ibrs ibpb stibp ibrs_enhanced vmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap

AMD-V

4.5 MiB (96 instances)

3 MiB (96 instances)

96 MiB (96 instances)

512 MiB (16 instances)

8

0-11,96-107

12-23,108-119

24-35,120-131

36-47,132-143

48-59,144-155

60-71,156-167

72-83,168-179

84-95,180-191

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Vulnerability Tsx async abort:

Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-11,96-107

node 0 size: 96294 MB

node 0 free: 95076 MB

node 1 cpus: 12-23,108-119

node 1 size: 96759 MB

node 1 free: 95601 MB

node 2 cpus: 24-35,120-131

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Platform Notes (Continued)

```
node 2 size: 96759 MB
node 2 free: 95436 MB
node 3 cpus: 36-47,132-143
node 3 size: 96759 MB
node 3 free: 95335 MB
node 4 cpus: 48-59,144-155
node 4 size: 96759 MB
node 4 free: 95607 MB
node 5 cpus: 60-71,156-167
node 5 size: 96759 MB
node 5 free: 95598 MB
node 6 cpus: 72-83,168-179
node 6 size: 96759 MB
node 6 free: 95597 MB
node 7 cpus: 84-95,180-191
node 7 size: 96692 MB
node 7 free: 95495 MB
node distances:
node  0  1  2  3  4  5  6  7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
MemTotal:          792110204 kB
```

```
-----
10. who -r
run-level 5 Oct 28 07:22
```

```
-----
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.11)
Default Target      Status
graphical            running
```

```
-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled      console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower
indirect     systemd-sysupdate systemd-sysupdate-reboot uuid
masked       cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-86-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

14. cpupower frequency-info
analyzing CPU 99:
current policy: frequency should be within 1.50 GHz and 3.15 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3150MHz

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4 877G 16G 825G 2% /

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: SMC H13
Serial: 0123456789

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x Micron Technology MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 3.5
BIOS Date: 03/31/2025
BIOS Revision: 5.35

Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
---	---

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++	508.namd_r(base, peak) 510.parest_r(base, peak)
-----	---

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Base Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang  
-ldl
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Sep-2025

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

C++ benchmarks:

508.namd_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH, AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Peak Optimization Flags (Continued)

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: basepeak = yes
```

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

Peak Optimization Flags (Continued)

527.cam4_r (continued):

-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000 -lamdlibm
-lamdalloc -ldl

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -1125HS-TNR
(H13DSH , AMD EPYC 9455)

SPECrate®2017_fp_base = 1430

SPECrate®2017_fp_peak = 1490

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Turin-revE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-28 08:00:09-0400.

Report generated on 2025-11-19 10:41:19 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-18.