SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

PRIMERGY RX2540 M8, Intel Xeon 6787P, 2.00GHz

SPECspeed®2026_int_base = 6.57

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: Jun-2026
Hardware Availability: Oct-2025
Software Availability: Apr-2026

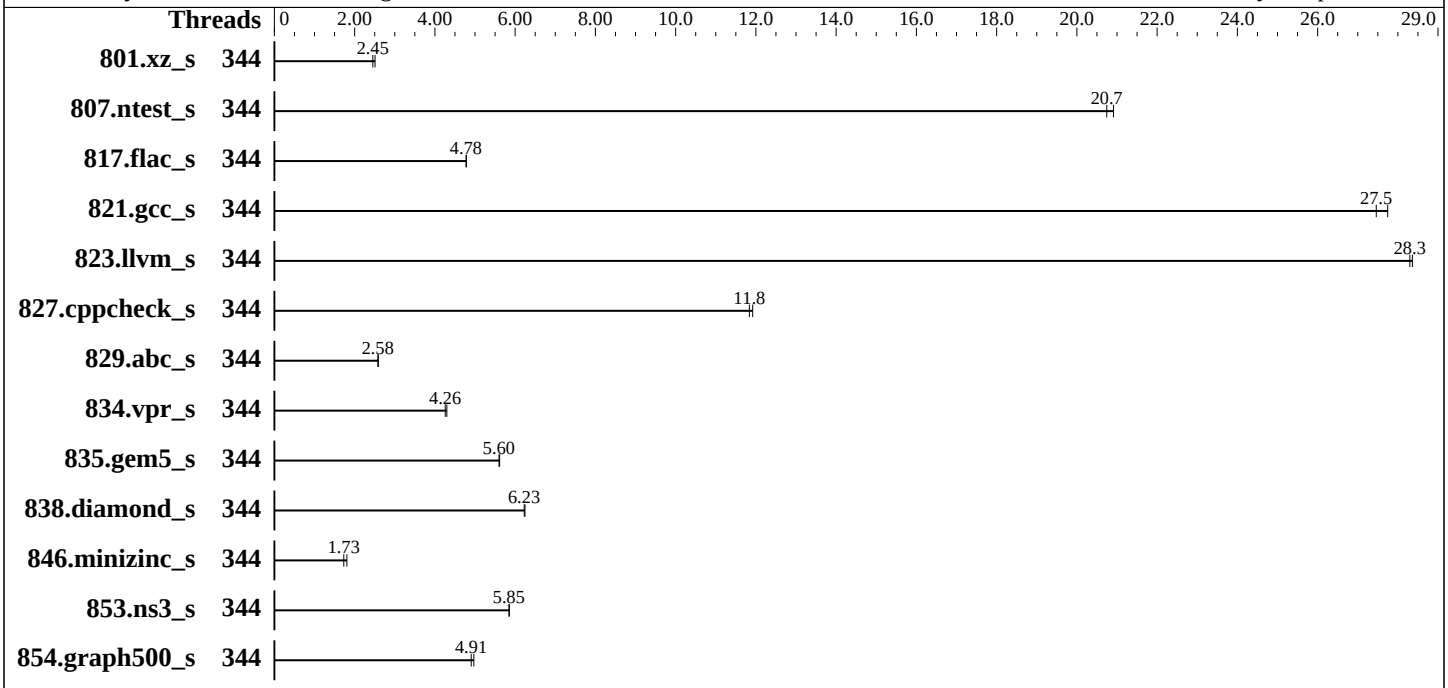

Hardware

CPU Name:	Intel Xeon 6787P
Max MHz:	3800
Nominal:	2000
Enabled:	172 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	336 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-88/56B-M, running at 8000)
Storage:	1 x PCIe SSD, 1.92TB
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP7 6.4.0-150700.51-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Fsas Technologies Inc. BIOS Version V1.0.0.0 R1.5.0 for D4135-A1x. Released Apr-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator v5.3
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Integer Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

Fsas Technologies Inc.
(Test Sponsor: Fujitsu)
PRIMERGY RX2540 M8, Intel Xeon 6787P, 2.00GHz

SPECspeed®2026_int_base = 6.57

SPECspeed®2026_int_peak = Not Run

CPU2026 License: 19
Test Sponsor: Fujitsu
Tested by: Fsas Technologies Inc.

Test Date: Jun-2026
Hardware Availability: Oct-2025
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
801.xz_s	344	**241**	**2.45**	236	2.51									
807.ntest_s	344	54.5	20.9	**55.0**	**20.7**									
817.flac_s	344	363	4.79	**364**	**4.78**									
821.gcc_s	344	**75.4**	**27.5**	74.6	27.7									
823.llvm_s	344	49.7	28.4	**49.9**	**28.3**									
827.cppcheck_s	344	93.9	11.9	**94.5**	**11.8**									
829.abc_s	344	321	2.59	**322**	**2.58**									
834.vpr_s	344	**224**	**4.26**	222	4.30									
835.gem5_s	344	**203**	**5.60**	203	5.61									
838.diamond_s	344	**161**	**6.23**	160	6.25									
846.minizinc_s	344	371	1.81	**387**	**1.73**									
853.ns3_s	344	**197**	**5.85**	197	5.86									
854.graph500_s	344	**125**	**4.91**	123	4.97									

SPECspeed®2026_int_base = 6.57

SPECspeed®2026_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/Benchmark/cpu2026/lib"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the CentOS Stream 9, and the system compiler gcc 11.5.0
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Fan Control = Full
SNC (Sub NUMA) = Enabled
CPU Performance Boost = Aggressive
LLC Prefetch = Enabled
Homeless Prefetch = Enabled
Latency Optimized Mode = Enabled

Sysinfo program /home/Benchmark/cpu2026/bin/sysinfo
Rev: 779ab21020787073335a329f3a45e2cd
running on localhost Tue Jun  2 22:31:06 2026

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611) x86_64

------------------------------------------------------------
2. w
```

(Continued on next page)

Platform Notes (Continued)

```
   22:31:06 up 3 min,  1 user,  load average: 1.05, 2.10, 1.01
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                22:30   10.00s  1.57s  0.19s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2061619
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2061619
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --reportable --action validate --define default-platform-flags -c
   ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 344 --define cores=172 --tune base -o
   all --define intspeedaffinity --define smt-on --define drop_caches intspeed
 runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
   ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 344 --define cores=172 --tune base
   --output_format all --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode
   speed --tune base --size refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2026

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6787P
```

(Continued on next page)

Platform Notes (Continued)

```
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 173
     stepping        : 1
     microcode       : 0x1000405
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
     cpu cores       : 86
     siblings        : 172
     2 physical ids (chips)
     344 processors (hardware threads)
     physical id 0: core ids 0-42,64-106
     physical id 1: core ids 0-42,64-106
     physical id 0: apicids 0-85,128-213
     physical id 1: apicids 256-341,384-469
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.40.4:
   Architecture:                          x86_64
   CPU op-mode(s):                        32-bit, 64-bit
   Address sizes:                         52 bits physical, 57 bits virtual
   Byte Order:                            Little Endian
   CPU(s):                                344
   On-line CPU(s) list:                   0-343
   Vendor ID:                             GenuineIntel
   Model name:                            Intel(R) Xeon(R) 6787P
   CPU family:                            6
   Model:                                 173
   Thread(s) per core:                    2
   Core(s) per socket:                    86
   Socket(s):                             2
   Stepping:                              1
   CPU(s) scaling MHz:                    21%
   CPU max MHz:                           3800.0000
   CPU min MHz:                           800.0000
   BogoMIPS:                              4000.00
   Flags:                                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                          pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                          pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                          xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                          tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                          3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
```

(Continued on next page)

Platform Notes (Continued)

```
                                ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                               rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                 clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                              split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                               umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                  avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                              pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                                arch_capabilities
  Virtualization:                               VT-x
  L1d cache:                                    8.1 MiB (172 instances)
  L1i cache:                                    10.8 MiB (172 instances)
  L2 cache:                                     344 MiB (172 instances)
  L3 cache:                                     672 MiB (2 instances)
  NUMA node(s):                                 4
  NUMA node0 CPU(s):                            0-42,172-214
  NUMA node1 CPU(s):                            43-85,215-257
  NUMA node2 CPU(s):                            86-128,258-300
  NUMA node3 CPU(s):                            129-171,301-343
  Vulnerability Gather data sampling:           Not affected
  Vulnerability Itlb multihit:                  Not affected
  Vulnerability L1tf:                           Not affected
  Vulnerability Mds:                            Not affected
  Vulnerability Meltdown:                       Not affected
  Vulnerability Mmio stale data:                Not affected
  Vulnerability Reg file data sampling:         Not affected
  Vulnerability Retbleed:                       Not affected
  Vulnerability Spec rstack overflow:           Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                                PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                          Not affected
  Vulnerability Tsx async abort:                Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     8.1M   12 Data            1     64        1             64
     L1i       64K    10.8M   16 Instruction     1     64        1             64
     L2         2M     344M   16 Unified         2   2048        1             64
     L3       336M     672M   16 Unified         3 344064        1             64

------------------------------------------------------------
8. numactl --hardware
```

(Continued on next page)

Platform Notes (Continued)

```
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-42,172-214
  node 0 size: 128544 MB
  node 0 free: 127965 MB
  node 1 cpus: 43-85,215-257
  node 1 size: 129001 MB
  node 1 free: 128165 MB
  node 2 cpus: 86-128,258-300
  node 2 size: 129001 MB
  node 2 free: 128502 MB
  node 3 cpus: 129-171,301-343
  node 3 size: 128884 MB
  node 3 free: 128419 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527802072 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jun 2 22:28

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                    issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                  nvmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
                    wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime   systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                  man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                    smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
```

(Continued on next page)

Platform Notes (Continued)

```
                systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                  systemd-timesyncd vncserver@
  indirect        systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
  root=UUID=6490486a-f020-45c4-b83e-03e98fc56a3b
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  tsx=auto

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 54:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP7

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/cpu2026
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 btrfs  1.9T  156G  1.8T   9% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Fsas Technologies
    Product:        PRIMERGY RX2540 M8
    Product Family: SERVER
    Serial:         xxxxxxxxxx

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M327R4GA3EB0-CLVXB 32 GB 2 rank 8800, configured at 8000


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Vendor:       Fsas Technologies
    BIOS Version:      V1.0.0.0 R1.5.0 for D4135-A1x
    BIOS Date:         03/06/2026
    BIOS Revision:     1.5
    Firmware Revision: 3.12
```

Compiler Version Notes

```
==============================================================================
C      | 854.graph500_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++    | 807.ntest_s(base) 827.cppcheck_s(base) 853.ns3_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C | 801.xz_s(base) 817.flac_s(base) 821.gcc_s(base) 823.llvm_s(base)
       | 829.abc_s(base) 834.vpr_s(base) 835.gem5_s(base) 838.diamond_s(base)
       | 846.minizinc_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

834.vpr_s: `-fno-fast-math`

Base Optimization Flags

C benchmarks:
```
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fno-strict-aliasing -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

C++ benchmarks:
```
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

Benchmarks using both C and C++:
```
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fno-strict-aliasing -fiopenmp
-DSPEC_OPENMP -pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml
http://www.spec.org/cpu2026/results/flags/Fsas-Platform-Settings-V1.0-GNR-RevB.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-06-02 09:31:05-0400.
Report generated on 2026-08-11 15:23:47 by CPU2026 PDF formatter (unknown).
Originally published on 2026-06-16.