




CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K (72 processor)

SPECint_rate2000 = 852
SPECint_rate_base2000 = 789

SPEC license #: 6 Tested by: Sun Microsystems Test date: Jul-2004 Hardware Avail: Jul-2004 Software Avail: Apr-2004

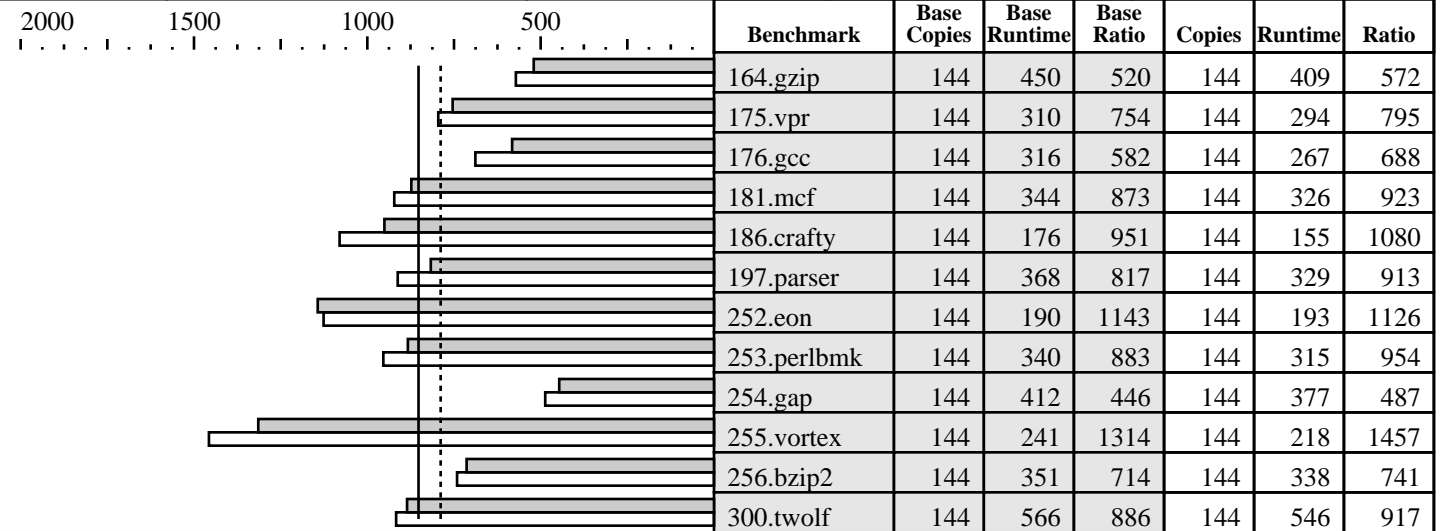

Hardware

CPU: UltraSPARC IV
 CPU MHz: 1200
 FPU: Integrated
 CPU(s) enabled: 144 cores, 72 chips, 2 cores/chip
 CPU(s) orderable: 4-72 (order by chips in groups of 4)
 Parallel: No
 Primary Cache: 32KBI+64KBD per core on chip (64KBI+128KBD on chip)
 Secondary Cache: 8MB(I+D) per core off chip (16MB(I+D) off chip)
 L3 Cache: None
 Other Cache: None
 Memory: 288GB 16-way interleaved
 Disk Subsystem: Sun StorEdge S1 Disk Array (2x36GB)
 Sun StorEdge T3 Array for the Workgroup (9x36GB)
 Other Hardware: None

Software

Operating System: Solaris 9 04/04
 Compiler: Sun Studio 8
 Sun Performance Library 8
 File System: ufs with ufs logging
 System State: Multi-User

Notes/Tuning Information

Compiler invocation:

C: cc
CXX: CC

Integer base flags:

-fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:

ONESTEP=yes and feedback for all benchmarks

164.zip: -xO4 -xbuiltin=%all -xtarget=native -xalias_level=std
 -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr: -fast -xalias_level=std -xipo=2
 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc: -fast -xipo=2 -l12amm
 181.mcf: -fast -xipo=2 -xprefetch_level=2 -Wc,-Qeps:enabled=1
 186.crafty: -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst



CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K (72 processor)

SPECint_rate2000 = 852
SPECint_rate_base2000 = 789

SPEC license #: 6 Tested by: Sun Microsystems Test date: Jul-2004 Hardware Avail: Jul-2004 Software Avail: Apr-2004

Notes/Tuning Information (Continued)

```

Feedback adds -xlinkopt in PASS2
197.parser: -fast -xipo=2 -xalias_level=strong
            -Wc,-Qgsched-T6,-Qipa:valueprediction
252.eon:    -fast -xipo=2 -xalias_level=compatible -noex
            -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
253.perlbnk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
            -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
            -Qiselect-funcalign=32,-Qicache-chbab=1
254.gap:    -fast -xipo=2 -xalias_level=strong -xvector
            -xprefetch_level=3 -W2,-Abcopy
255.vortex: -fast -xrestrict -xipo=2
            -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
            -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
            -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
256.bzip2:  -fast -xipo -xalias_level=strong -xrestrict
            -Wc,-Qeps:enabled=1
300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
            -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

```

Feedback is done as follows, unless otherwise noted:

```

fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
PASS1:     -xprofile=collect:./feedback
PASS2:     -xprofile=use:./feedback

```

Portability:

```

176.gcc:   -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon:   -library=iostream
253.perlbnk: -DSPEC_CPU2000_SOLARIS
254.gap:   -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
            -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

```

Shell Environments:

```

Stack size set to unlimited via "ulimit -s unlimited"
MPSSHEAP=4M
MPSSSTACK=4M
LD_PRELOAD=mpss.so.1

```

Kernel Parameters (/etc/system):

```

autoup=900
tune_t_fsflushr=1

```

Processes were bound to CPUs using submit=pbind

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorEdge S1
Disk Array (ufs, ufs w/logging). The benchmark was run on
the Sun StorEdge T3 Array, using H/W Raid 5 and ufs with
ufs logging file system.