



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5310,1.60GHz)

SPECint®2006 = 10.3

SPECint\_base2006 = 9.85

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Apr-2007

Hardware Availability: Jan-2007

Software Availability: Dec-2006

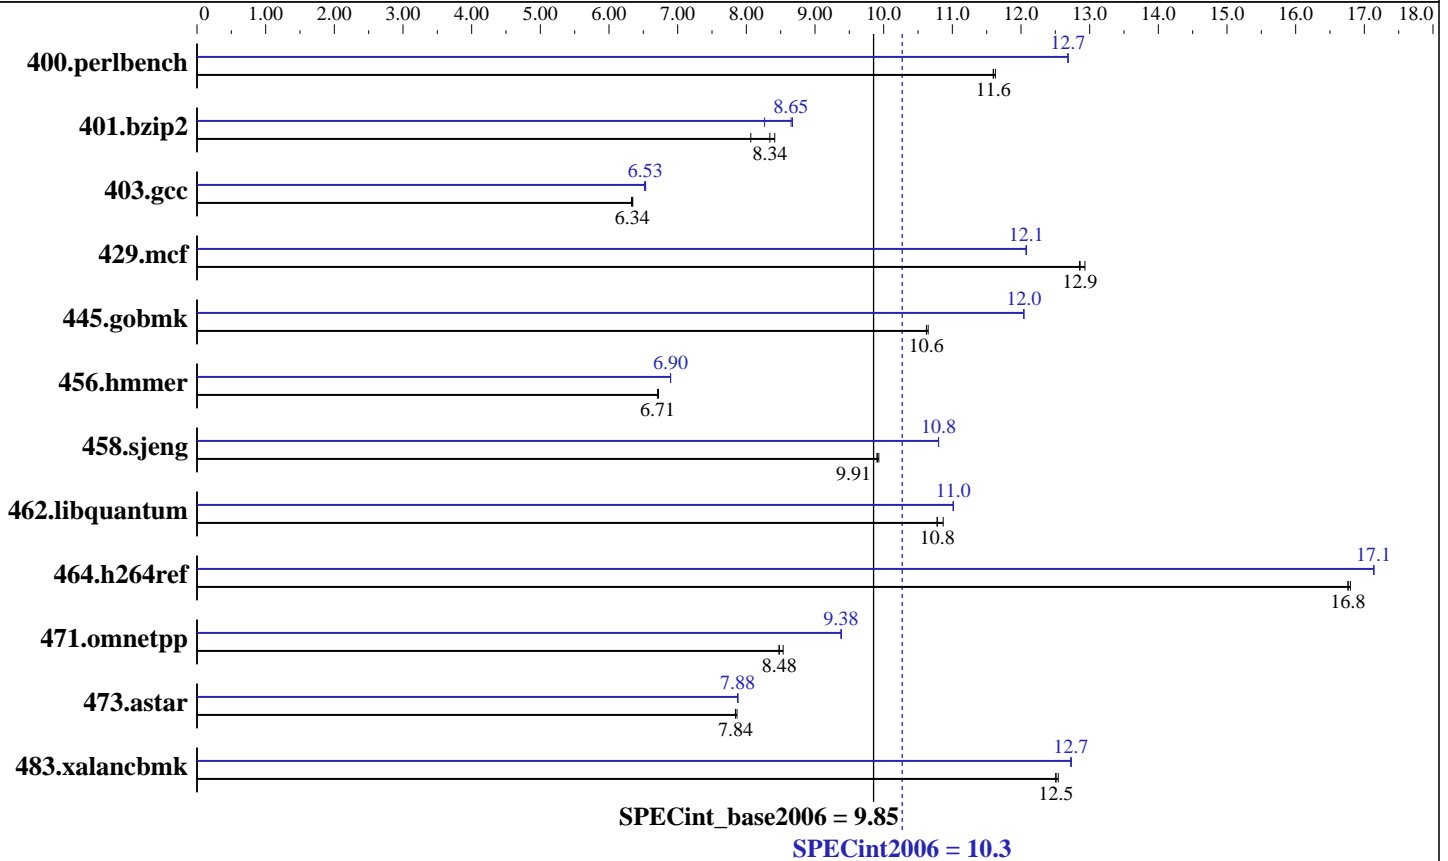

### Hardware

CPU Name: Intel Xeon E5310  
 CPU Characteristics: 1.60 GHz, 8 MB L2, 1066 MHz bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB) FB-DIMM PC2-5300F ECC CL5  
 Disk Subsystem: 1x73 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5310,1.60GHz)

SPECint2006 = 10.3

SPECint\_base2006 = 9.85

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	843	11.6	<b>842</b>	<b>11.6</b>	840	11.6	770	12.7	<b>770</b>	<b>12.7</b>	770	12.7
401.bzip2	<b>1157</b>	<b>8.34</b>	1197	8.06	1147	8.41	<b>1115</b>	<b>8.65</b>	1167	8.27	1113	8.67
403.gcc	1268	6.35	1272	6.33	<b>1270</b>	<b>6.34</b>	<b>1233</b>	<b>6.53</b>	1232	6.53	1235	6.52
429.mcf	<b>709</b>	<b>12.9</b>	710	12.9	705	12.9	755	12.1	<b>755</b>	<b>12.1</b>	755	12.1
445.gobmk	<b>987</b>	<b>10.6</b>	987	10.6	985	10.6	871	12.0	<b>871</b>	<b>12.0</b>	871	12.0
456.hammer	<b>1390</b>	<b>6.71</b>	1390	6.71	1388	6.72	1353	6.90	<b>1353</b>	<b>6.90</b>	1353	6.90
458.sjeng	<b>1221</b>	<b>9.91</b>	1222	9.90	1219	9.93	1120	10.8	<b>1121</b>	<b>10.8</b>	1121	10.8
462.libquantum	1922	10.8	<b>1922</b>	<b>10.8</b>	1907	10.9	1881	11.0	1881	11.0	<b>1881</b>	<b>11.0</b>
464.h264ref	<b>1320</b>	<b>16.8</b>	1320	16.8	1318	16.8	1291	17.1	1292	17.1	<b>1292</b>	<b>17.1</b>
471.omnetpp	<b>737</b>	<b>8.48</b>	737	8.48	732	8.54	666	9.39	<b>666</b>	<b>9.38</b>	666	9.38
473.astar	895	7.84	<b>895</b>	<b>7.84</b>	893	7.86	891	7.88	<b>891</b>	<b>7.88</b>	891	7.88
483.xalancbmk	<b>552</b>	<b>12.5</b>	552	12.5	550	12.5	542	12.7	542	12.7	<b>542</b>	<b>12.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5310,1.60GHz)

SPECint2006 = 10.3

SPECint\_base2006 = 9.85

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Apr-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Base Optimization Flags (Continued)

C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:  
-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:  
-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260 (Intel Xeon processor E5310,1.60GHz)

**SPECint2006 = 10.3**

**SPECint\_base2006 = 9.85**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Apr-2007  
**Hardware Availability:** Jan-2007  
**Software Availability:** Dec-2006

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:50:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 May 2007.