SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260
(Intel Xeon E5450, 3.00 GHz)

SPECfp®_rate2006 = 67.5

SPECfp_rate_base2006 = 59.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

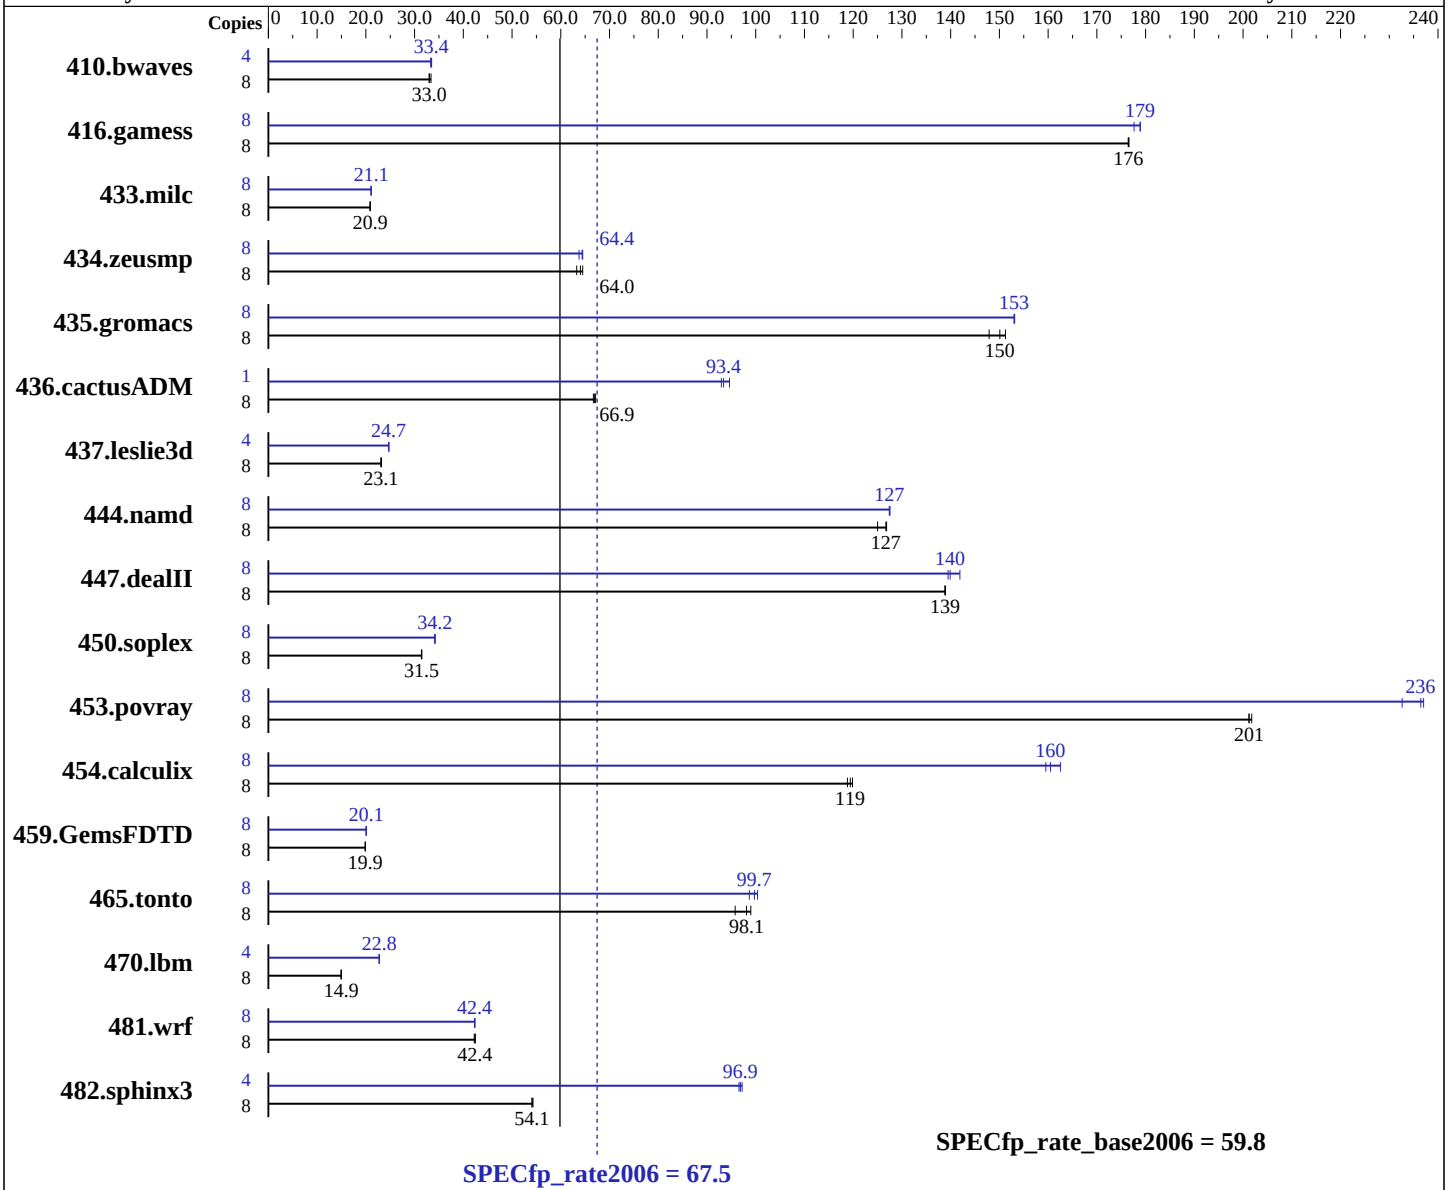

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE LINUX Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260
(Intel Xeon E5450, 3.00 GHz)

SPECfp_rate2006 = 67.5

SPECfp_rate_base2006 = 59.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x73 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3258	33.4	3297	33.0	**3290**	**33.0**	4	**1627**	**33.4**	1623	33.5	1632	33.3
416.gamess	8	888	176	**888**	**176**	887	177	8	882	178	875	179	**876**	**179**
433.milc	8	3518	20.9	**3514**	**20.9**	3513	20.9	8	3480	21.1	**3481**	**21.1**	3488	21.1
434.zeusmp	8	**1137**	**64.0**	1129	64.5	1151	63.3	8	1129	64.5	**1131**	**64.4**	1142	63.7
435.gromacs	8	378	151	**381**	**150**	386	148	8	373	153	373	153	**373**	**153**
436.cactusADM	8	1434	66.7	**1429**	**66.9**	1424	67.2	1	129	93.0	**128**	**93.4**	126	94.6
437.leslie3d	8	3239	23.2	3258	23.1	**3251**	**23.1**	4	1522	24.7	**1522**	**24.7**	1523	24.7
444.namd	8	513	125	506	127	**506**	**127**	8	503	128	504	127	**503**	**127**
447.dealII	8	**659**	**139**	659	139	659	139	8	**654**	**140**	645	142	656	139
450.soplex	8	2120	31.5	**2121**	**31.5**	2125	31.4	8	1955	34.1	1951	34.2	**1951**	**34.2**
453.povray	8	**211**	**201**	211	202	212	201	8	180	237	**180**	**236**	183	233
454.calculix	8	551	120	555	119	**553**	**119**	8	414	160	406	163	**411**	**160**
459.GemsFDTD	8	4267	19.9	**4268**	**19.9**	4269	19.9	8	**4230**	**20.1**	4222	20.1	4232	20.1
465.tonto	8	**802**	**98.1**	822	95.8	795	99.0	8	798	98.7	784	100	**789**	**99.7**
470.lbm	8	7358	14.9	**7356**	**14.9**	7355	14.9	4	2414	22.8	**2415**	**22.8**	2420	22.7
481.wrf	8	2116	42.2	2104	42.5	**2108**	**42.4**	8	2113	42.3	2108	42.4	**2109**	**42.4**
482.sphinx3	8	**2881**	**54.1**	2872	54.3	2883	54.1	4	**805**	**96.9**	802	97.2	807	96.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex,
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
BIOS settings :
Hardware Prefetcher :                Enabled
Adjacent Cache-Line Prefetch :       Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:42:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 September 2008.