



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon X5550, 2.67 GHz)

SPECint[®]2006 = 35.6

SPECint_base2006 = 32.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

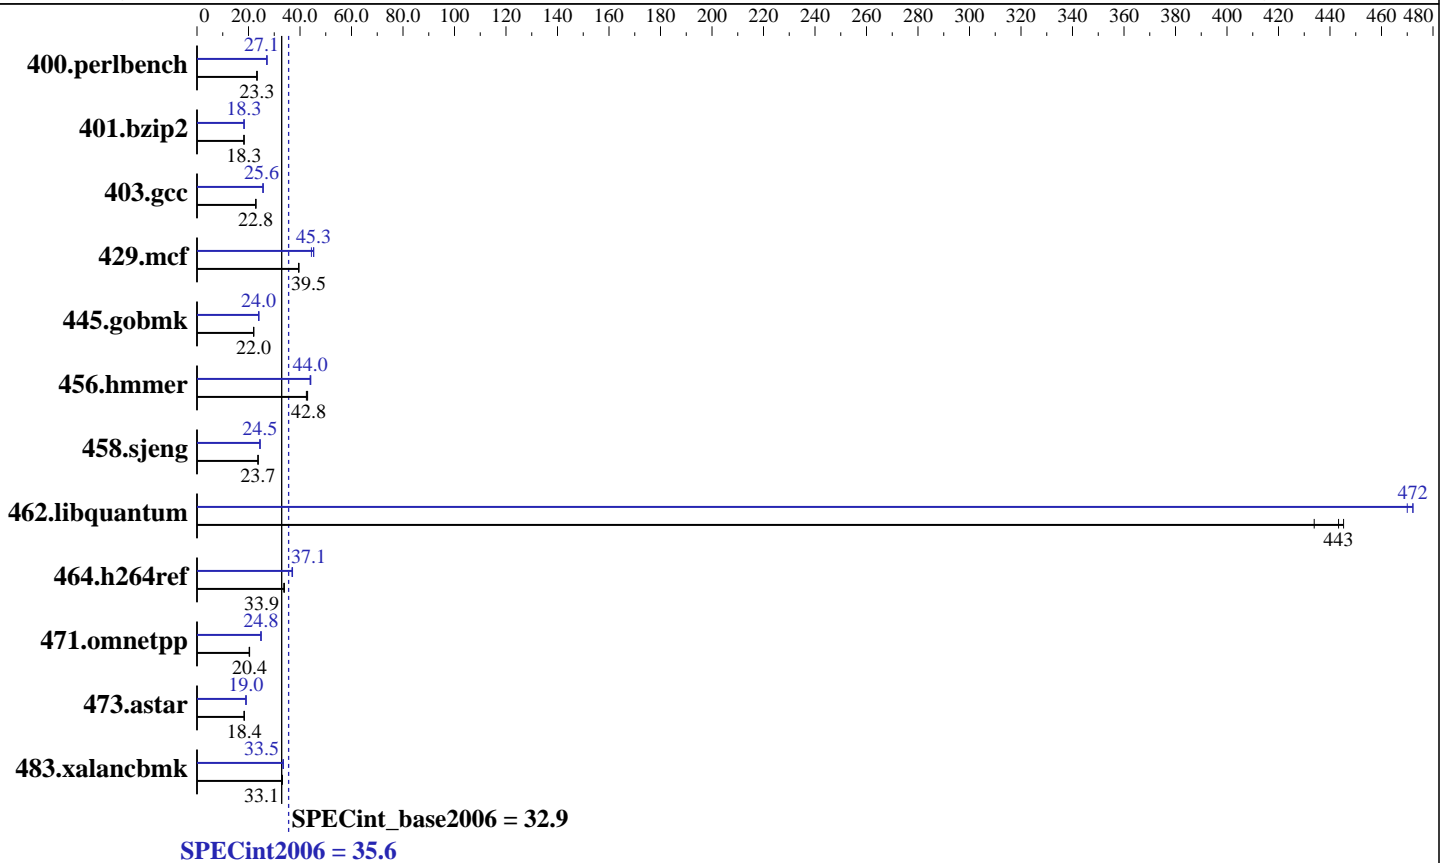

Hardware

CPU Name: Intel Xeon X5550
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon X5550, 2.67 GHz)

SPECint2006 = 35.6

SPECint_base2006 = 32.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	418	23.4	421	23.2	<u>419</u>	<u>23.3</u>	<u>360</u>	<u>27.1</u>	360	27.2	360	27.1
401.bzip2	528	18.3	<u>528</u>	<u>18.3</u>	529	18.2	528	18.3	527	18.3	<u>528</u>	<u>18.3</u>
403.gcc	353	22.8	352	22.9	<u>352</u>	<u>22.8</u>	314	25.6	<u>314</u>	<u>25.6</u>	313	25.7
429.mcf	231	39.5	<u>231</u>	<u>39.5</u>	230	39.6	205	44.4	<u>201</u>	<u>45.3</u>	201	45.3
445.gobmk	<u>477</u>	<u>22.0</u>	477	22.0	477	22.0	437	24.0	<u>437</u>	<u>24.0</u>	438	24.0
456.hammer	217	43.0	220	42.5	<u>218</u>	<u>42.8</u>	<u>212</u>	<u>44.0</u>	212	44.0	211	44.2
458.sjeng	<u>510</u>	<u>23.7</u>	511	23.7	510	23.7	494	24.5	<u>495</u>	<u>24.5</u>	495	24.4
462.libquantum	<u>46.7</u>	<u>44.3</u>	46.5	44.5	47.8	43.4	43.9	472	<u>43.9</u>	<u>472</u>	44.1	470
464.h264ref	<u>653</u>	<u>33.9</u>	652	34.0	657	33.7	600	36.9	<u>597</u>	<u>37.1</u>	596	37.1
471.omnetpp	309	20.3	<u>306</u>	<u>20.4</u>	306	20.4	252	24.8	<u>252</u>	<u>24.8</u>	251	24.9
473.astar	<u>382</u>	<u>18.4</u>	382	18.4	384	18.3	369	19.0	<u>369</u>	<u>19.0</u>	368	19.1
483.xalancbmk	208	33.1	208	33.2	<u>208</u>	<u>33.1</u>	<u>206</u>	<u>33.5</u>	206	33.4	206	33.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Bull NovaScale R460 F2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon X5550, 2.67 GHz)

SPECint2006 = 35.6

SPECint_base2006 = 32.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Base Portability Flags (Continued)

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32
429.mcf: icc -m32
445.gobmk: icc -m32
464.h264ref: icc -m32
C++ benchmarks (except as noted below):
icpc -m32
473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon X5550, 2.67 GHz)

SPECint2006 = 35.6

SPECint_base2006 = 32.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -auto-ilp32
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -par-schedule-static=32768 -ansi-alias
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2
(Intel Xeon X5550, 2.67 GHz)

SPECint2006 = 35.6

SPECint_base2006 = 32.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:54:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.