



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp[®]_rate2006 = 202

SPECfp_rate_base2006 = 187

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Dec-2011

Software Availability: Jul-2011

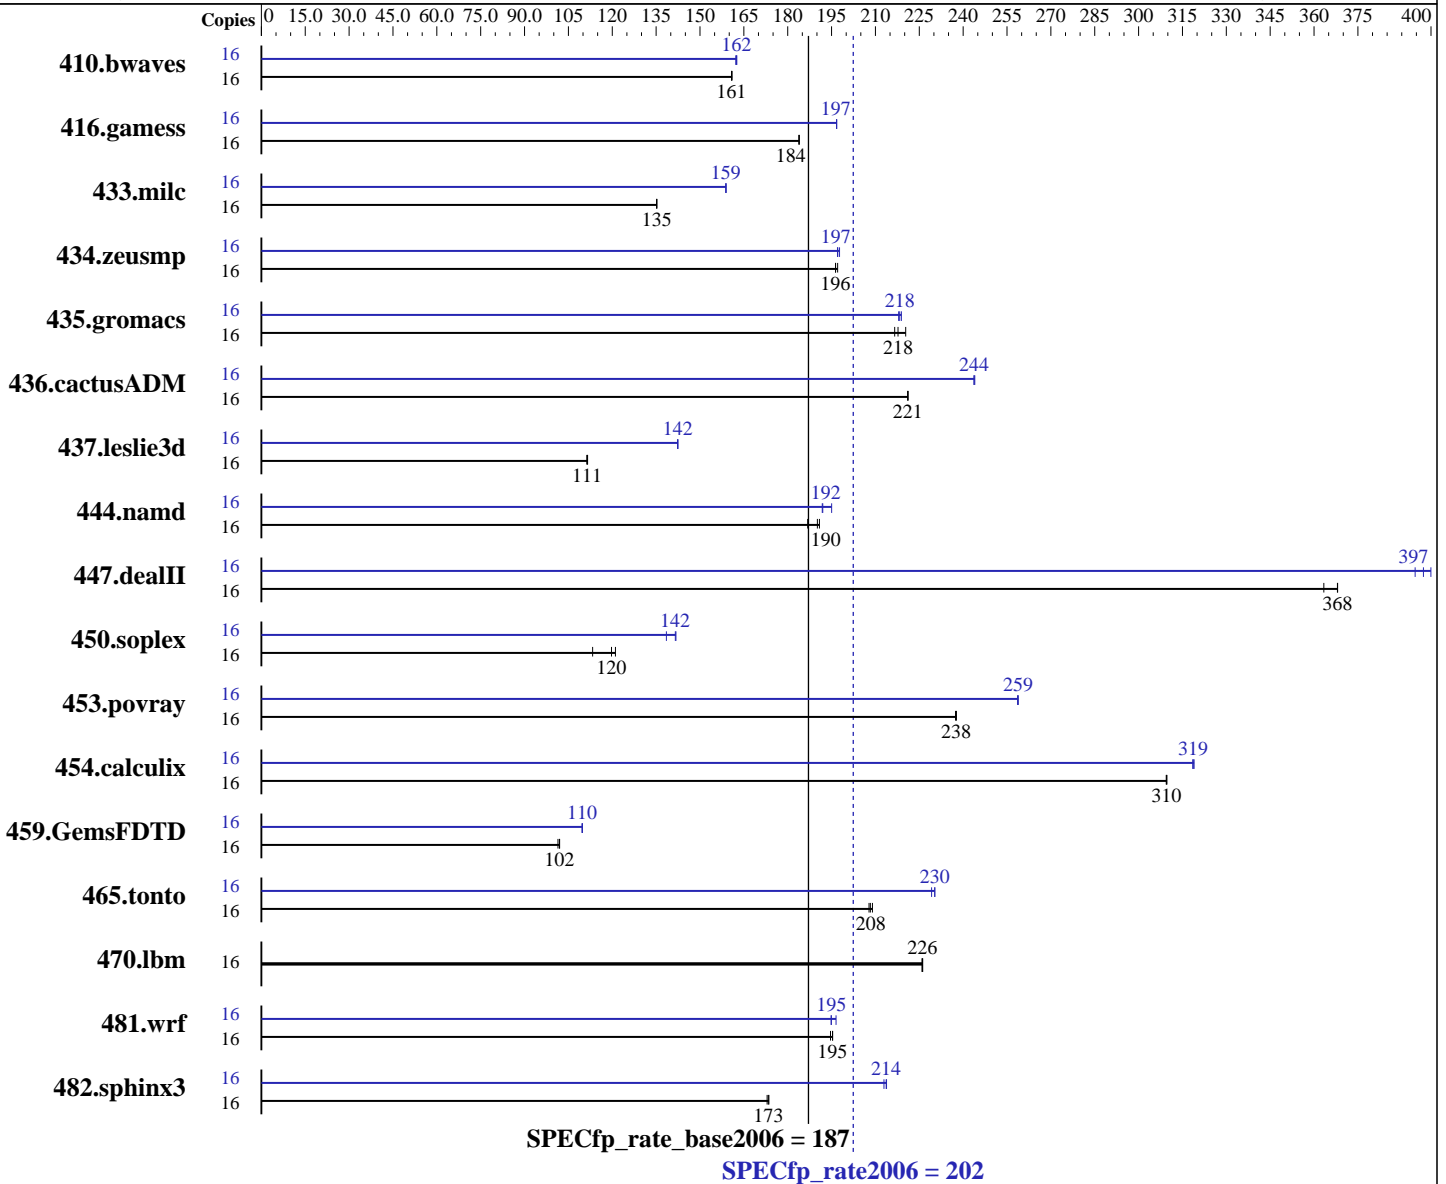

Hardware

CPU Name: AMD Opteron 4280
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate2006 = 202

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Dec-2011

Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 2 x 73 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	<u>1352</u>	<u>161</u>	1351	161	1352	161	16	<u>1338</u>	<u>162</u>	1337	163	1340	162		
416.gamess	16	<u>1703</u>	<u>184</u>	1704	184	1703	184	16	1592	197	1593	197	<u>1593</u>	<u>197</u>		
433.milc	16	1087	135	<u>1086</u>	<u>135</u>	1086	135	16	924	159	925	159	<u>925</u>	<u>159</u>		
434.zeusmp	16	<u>741</u>	<u>196</u>	742	196	739	197	16	736	198	739	197	<u>739</u>	<u>197</u>		
435.gromacs	16	518	220	<u>525</u>	<u>218</u>	527	217	16	522	219	524	218	<u>523</u>	<u>218</u>		
436.cactusADM	16	865	221	<u>865</u>	<u>221</u>	865	221	16	784	244	784	244	<u>784</u>	<u>244</u>		
437.leslie3d	16	1351	111	1348	112	<u>1349</u>	<u>111</u>	16	1056	142	<u>1056</u>	<u>142</u>	1056	142		
444.namd	16	<u>675</u>	<u>190</u>	672	191	687	187	16	658	195	669	192	<u>668</u>	<u>192</u>		
447.dealII	16	<u>497</u>	<u>368</u>	504	363	497	368	16	464	395	458	400	<u>461</u>	<u>397</u>		
450.soplex	16	1178	113	<u>1114</u>	<u>120</u>	1102	121	16	963	139	<u>943</u>	<u>142</u>	941	142		
453.povray	16	359	237	358	238	<u>358</u>	<u>238</u>	16	329	259	<u>329</u>	<u>259</u>	329	259		
454.calculix	16	426	310	427	309	<u>426</u>	<u>310</u>	16	414	319	414	319	<u>414</u>	<u>319</u>		
459.GemsFDTD	16	<u>1665</u>	<u>102</u>	1664	102	1674	101	16	1548	110	1546	110	<u>1547</u>	<u>110</u>		
465.tonto	16	753	209	<u>756</u>	<u>208</u>	758	208	16	684	230	<u>684</u>	<u>230</u>	687	229		
470.lbm	16	<u>972</u>	<u>226</u>	972	226	973	226	16	<u>972</u>	<u>226</u>	972	226	973	226		
481.wrf	16	<u>915</u>	<u>195</u>	918	195	915	195	16	917	195	909	197	<u>917</u>	<u>195</u>		
482.sphinx3	16	1803	173	1797	174	<u>1799</u>	<u>173</u>	16	1459	214	1465	213	<u>1459</u>	<u>214</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Large pages were not enabled for this run
Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate2006 = 202

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Dec-2011

Software Availability: Jul-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS

General Notes

environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate2006 = 202

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Dec-2011

Software Availability: Jul-2011

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 202

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Nov-2011

Test sponsor: Dell Inc.

Hardware Availability: Dec-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
      -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
      -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
      -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
      -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
      -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
      -fno-exceptions -HP:bdt=2m:heap=2m

```

```

447.deallI: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
      -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
      -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
      -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
      -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
      -TENV:frame_pointer=off

```

```

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
      -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
      -OPT:fold_unsigned_relops=on -fno-exceptions -m32
      -HP:bdt=2m:heap=2m -WOPT:sib=on

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 202

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test date: Nov-2011

Test sponsor: Dell Inc.

Hardware Availability: Dec-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bd=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415
(AMD Opteron 4280, 2.80 GHz)

SPECfp_rate2006 = 202

SPECfp_rate_base2006 = 187

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Dec-2011

Software Availability: Jul-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:43:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.