



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

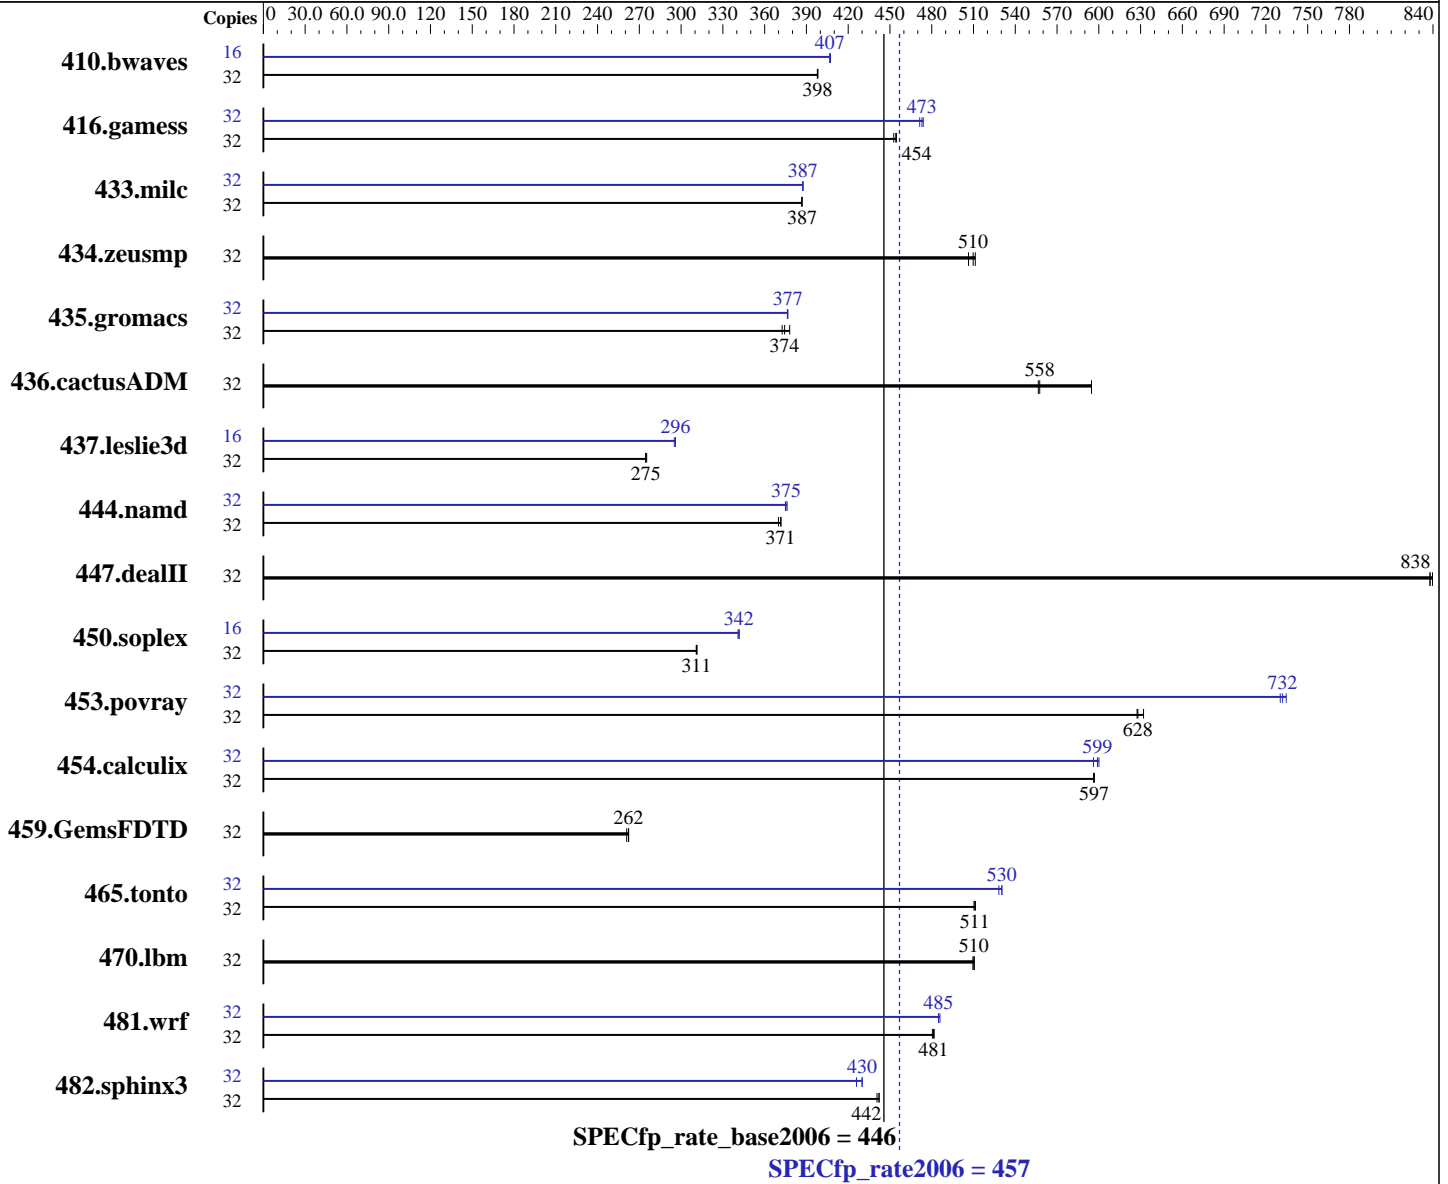

Hardware

CPU Name: Intel Xeon E5-2660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 2 x 146 GB 15 K SAS, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: HP Array Configuration Utility, CLI version

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<u>1093</u>	<u>398</u>	1092	398	1093	398	16	535	407	<u>535</u>	<u>407</u>	534	407
416.gamess	32	1378	455	<u>1380</u>	<u>454</u>	1384	453	32	1322	474	1329	471	<u>1325</u>	<u>473</u>
433.milc	32	760	387	759	387	<u>759</u>	<u>387</u>	32	758	388	758	387	<u>758</u>	<u>387</u>
434.zeusmp	32	575	506	570	511	<u>571</u>	<u>510</u>	32	575	506	570	511	<u>571</u>	<u>510</u>
435.gromacs	32	604	378	<u>610</u>	<u>374</u>	613	373	32	607	377	<u>607</u>	<u>377</u>	607	376
436.cactusADM	32	643	595	<u>686</u>	<u>558</u>	687	557	32	643	595	<u>686</u>	<u>558</u>	687	557
437.leslie3d	32	1093	275	1096	274	<u>1095</u>	<u>275</u>	16	510	295	508	296	<u>508</u>	<u>296</u>
444.namd	32	<u>691</u>	<u>371</u>	694	370	690	372	32	682	376	685	375	<u>684</u>	<u>375</u>
447.dealII	32	437	838	436	840	<u>437</u>	<u>838</u>	32	437	838	436	840	<u>437</u>	<u>838</u>
450.soplex	32	858	311	857	311	<u>858</u>	<u>311</u>	16	391	341	<u>391</u>	<u>342</u>	390	342
453.povray	32	269	632	271	627	<u>271</u>	<u>628</u>	32	232	735	233	730	<u>233</u>	<u>732</u>
454.calculix	32	442	597	<u>442</u>	<u>597</u>	443	596	32	443	596	440	600	<u>441</u>	<u>599</u>
459.GemsFDTD	32	1294	262	<u>1295</u>	<u>262</u>	1301	261	32	1294	262	<u>1295</u>	<u>262</u>	1301	261
465.tonto	32	616	511	<u>616</u>	<u>511</u>	617	510	32	596	528	<u>594</u>	<u>530</u>	594	530
470.lbm	32	863	510	861	511	<u>862</u>	<u>510</u>	32	863	510	861	511	<u>862</u>	<u>510</u>
481.wrf	32	744	480	<u>743</u>	<u>481</u>	742	482	32	<u>737</u>	<u>485</u>	736	486	737	485
482.sphinx3	32	1415	441	<u>1411</u>	<u>442</u>	1410	442	32	1464	426	1450	430	<u>1450</u>	<u>430</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Operating System Notes (Continued)

Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom
 Energy/Performance Bias is set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Sysinfo program /cpu2006/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on DL360G8 Mon May 14 16:33:15 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2660 0 @ 2.20GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 8
  siblings      : 16
  physical 0:   cores 0 1 2 3 4 5 6 7
  physical 1:   cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132260288 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux DL360G8 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 May 14 16:27

SPEC is set to: /cpu2006

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	133G	8.7G	118G	7%	/

Additional information from dmidecode:

BIOS HP P71 02/21/2012

Memory:

16x Not Specified Not Specified 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB memory using SLES11 SP2,RC3

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
         -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -prof-use(pass 2) -static

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 457

ProLiant DL360p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 446

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120605.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120605.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 06:09:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.