



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3


Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

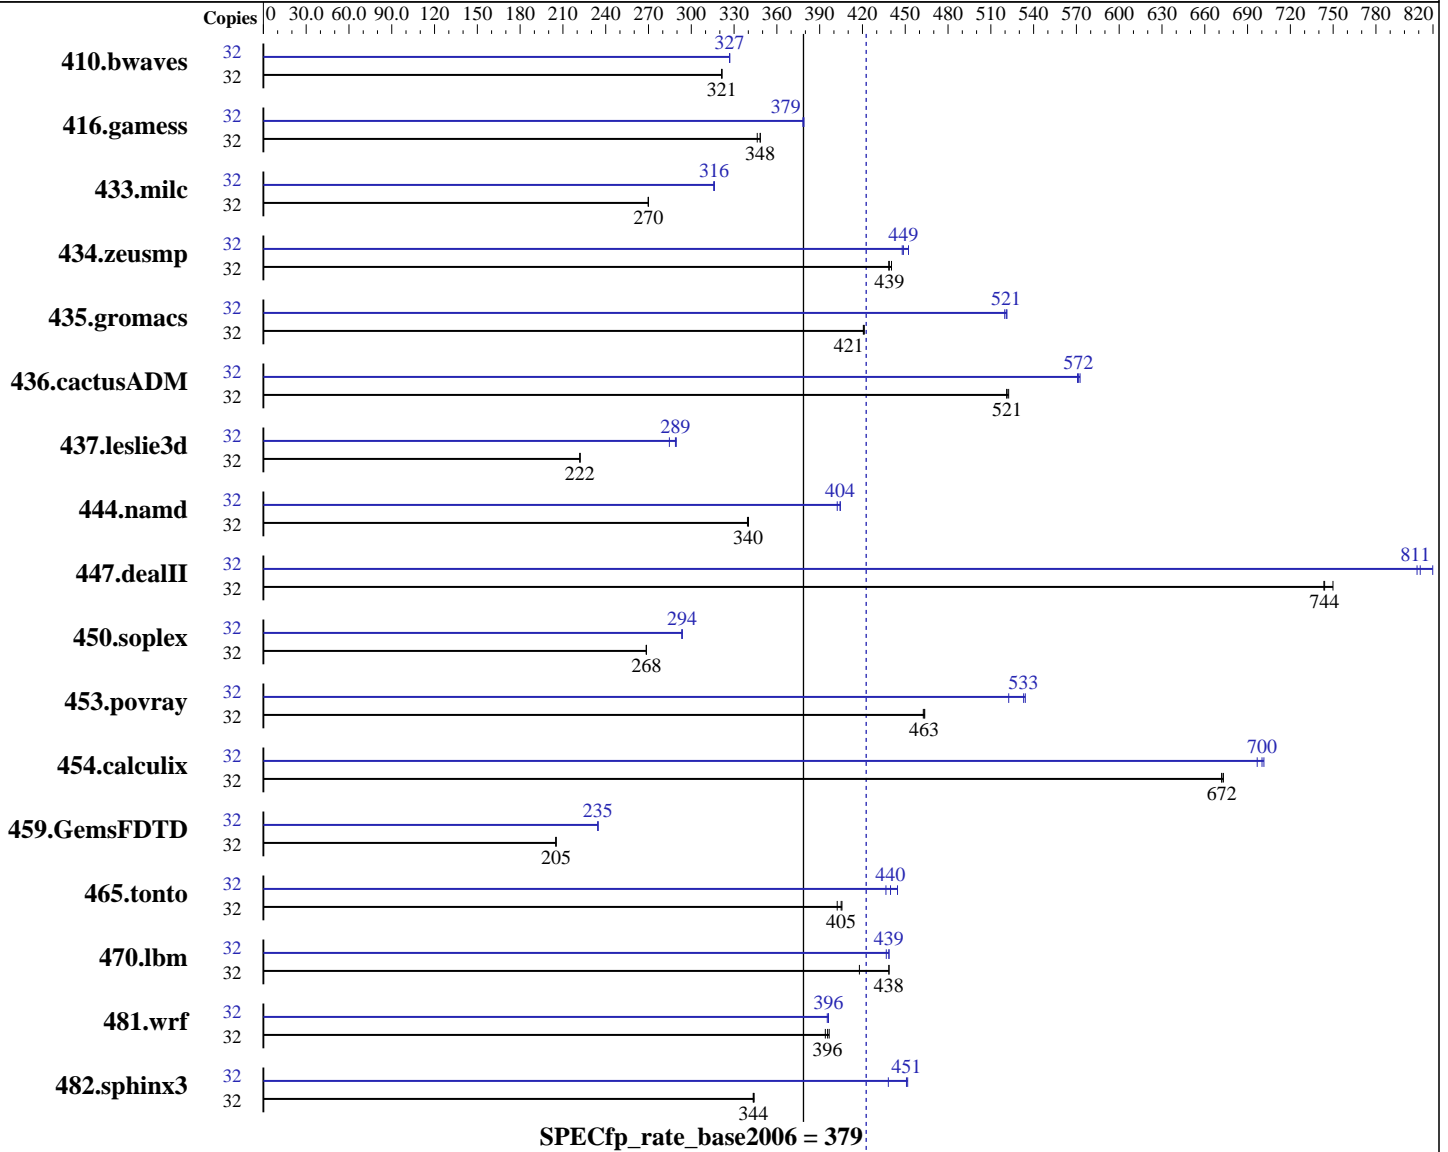

Hardware

CPU Name: AMD Opteron 6380
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 2 x 200 GB SSD SAS, RAID 1

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1353	321	<u>1353</u>	<u>321</u>	1353	321	32	1330	327	<u>1330</u>	<u>327</u>	1330	327
416.gamess	32	<u>1799</u>	<u>348</u>	1799	348	1810	346	32	1656	378	1653	379	<u>1655</u>	<u>379</u>
433.milc	32	<u>1088</u>	<u>270</u>	1089	270	1088	270	32	929	316	<u>930</u>	<u>316</u>	930	316
434.zeusmp	32	661	440	<u>664</u>	<u>439</u>	664	438	32	<u>649</u>	<u>449</u>	644	452	650	448
435.gromacs	32	<u>543</u>	<u>421</u>	542	421	543	421	32	<u>439</u>	<u>521</u>	438	521	440	520
436.cactusADM	32	732	523	734	521	<u>733</u>	<u>521</u>	32	668	573	<u>669</u>	<u>572</u>	670	571
437.leslie3d	32	<u>1355</u>	<u>222</u>	1355	222	1355	222	32	1039	289	<u>1041</u>	<u>289</u>	1057	285
444.namd	32	756	339	755	340	<u>755</u>	<u>340</u>	32	<u>635</u>	<u>404</u>	638	402	634	405
447.dealII	32	<u>492</u>	<u>744</u>	488	750	492	743	32	<u>451</u>	<u>811</u>	447	820	453	809
450.soplex	32	994	268	<u>994</u>	<u>268</u>	994	269	32	910	293	909	294	<u>909</u>	<u>294</u>
453.povray	32	367	464	368	463	<u>367</u>	<u>463</u>	32	326	523	<u>319</u>	<u>533</u>	319	534
454.calculix	32	392	673	<u>393</u>	<u>672</u>	393	672	32	379	697	<u>377</u>	<u>700</u>	376	701
459.GemsFDTD	32	1654	205	<u>1655</u>	<u>205</u>	1656	205	32	1448	235	1447	235	<u>1447</u>	<u>235</u>
465.tonto	32	783	402	776	406	<u>777</u>	<u>405</u>	32	708	445	721	436	<u>716</u>	<u>440</u>
470.lbm	32	1052	418	1002	439	<u>1003</u>	<u>438</u>	32	1002	439	1007	437	<u>1003</u>	<u>439</u>
481.wrf	32	<u>904</u>	<u>396</u>	901	397	907	394	32	904	395	902	396	<u>902</u>	<u>396</u>
482.sphinx3	32	1816	343	1813	344	<u>1815</u>	<u>344</u>	32	<u>1383</u>	<u>451</u>	1381	452	1423	438

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

BIOS configuration:

```
HP Power Profile set to Maximum Performace
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disable
Minimum Processor Idle Power Cle State to Enabled
Processor Power and Utilization Monitoring set to Disable
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
openc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

```

C++ benchmarks:

```

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

```

Fortran benchmarks:

```

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

```

Benchmarks using both Fortran and C:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2012

Hardware Availability: Dec-2012

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 423

ProLiant BL465c Gen8
(2.50 GHz AMD Opteron 6380)

SPECfp_rate_base2006 = 379

CPU2006 license: 3

Test date: Sep-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdtd=2m:heap=2m
-march=bdver1

481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
-WOPT:sib=on -march=bdver1

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20121205.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20121205.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:22:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 December 2012.