



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55


Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

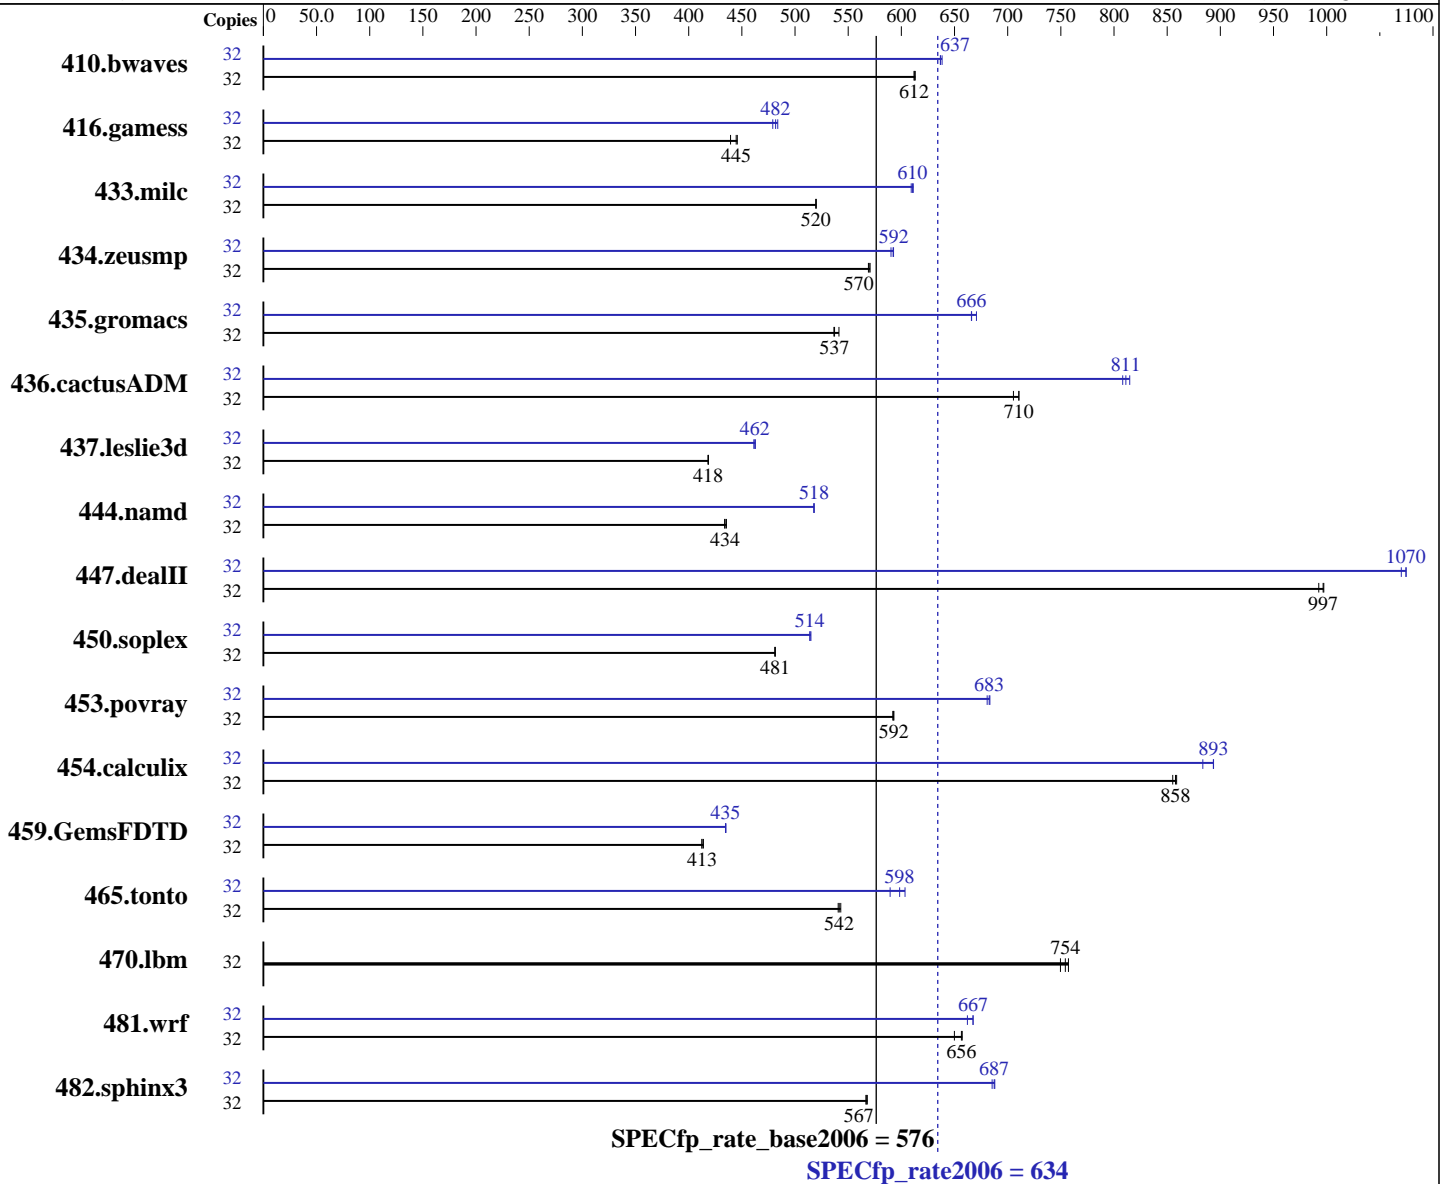

### Hardware

CPU Name: AMD Opteron 6328  
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache: 256 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 6 x 73 GB 7200 RPM SATA

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	711	612	<u>710</u>	<u>612</u>	709	613	32	681	638	<u>683</u>	<u>637</u>	683	637
416.gamess	32	1426	439	<u>1409</u>	<u>445</u>	1406	446	32	1295	484	1308	479	<u>1301</u>	<u>482</u>
433.milc	32	<u>565</u>	<u>520</u>	565	520	565	520	32	<u>481</u>	<u>610</u>	481	611	482	609
434.zeusmp	32	510	571	<u>511</u>	<u>570</u>	512	569	32	<u>492</u>	<u>592</u>	493	590	491	593
435.gromacs	32	426	537	<u>425</u>	<u>537</u>	422	541	32	341	671	343	666	<u>343</u>	<u>666</u>
436.cactusADM	32	538	711	542	705	<u>538</u>	<u>710</u>	32	<u>471</u>	<u>811</u>	473	808	469	815
437.leslie3d	32	719	419	<u>719</u>	<u>418</u>	719	418	32	<u>651</u>	<u>462</u>	652	461	650	463
444.namd	32	592	434	589	436	<u>591</u>	<u>434</u>	32	496	518	<u>496</u>	<u>518</u>	496	518
447.dealII	32	369	993	367	997	<u>367</u>	<u>997</u>	32	<u>341</u>	<u>1070</u>	341	1070	342	1070
450.soplex	32	554	481	<u>555</u>	<u>481</u>	555	481	32	<u>519</u>	<u>514</u>	518	515	519	514
453.povray	32	288	592	<u>287</u>	<u>592</u>	287	593	32	<u>249</u>	<u>683</u>	250	681	249	683
454.calculix	32	307	859	<u>308</u>	<u>858</u>	309	855	32	<u>295</u>	<u>893</u>	295	894	299	884
459.GemsFDTD	32	<u>823</u>	<u>413</u>	820	414	823	412	32	781	435	<u>781</u>	<u>435</u>	780	435
465.tonto	32	<u>581</u>	<u>542</u>	580	543	582	541	32	534	589	522	603	<u>526</u>	<u>598</u>
470.lbm	32	587	750	581	757	<u>583</u>	<u>754</u>	32	587	750	581	757	<u>583</u>	<u>754</u>
481.wrf	32	544	657	<u>544</u>	<u>656</u>	550	650	32	<u>536</u>	<u>667</u>	536	667	540	662
482.sphinx3	32	1098	568	1101	567	<u>1100</u>	<u>567</u>	32	<u>907</u>	<u>687</u>	910	685	907	688

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: basepeak = yes

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2
```

### Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1
```

```
459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1
```

```
465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1
```

### Benchmarks using both Fortran and C:

```
435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3
```

```
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1
```

```
454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 634

PowerEdge R815 (AMD Opteron 6328, 3.20 GHz)

SPECfp\_rate\_base2006 = 576

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:47:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 January 2013.