



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

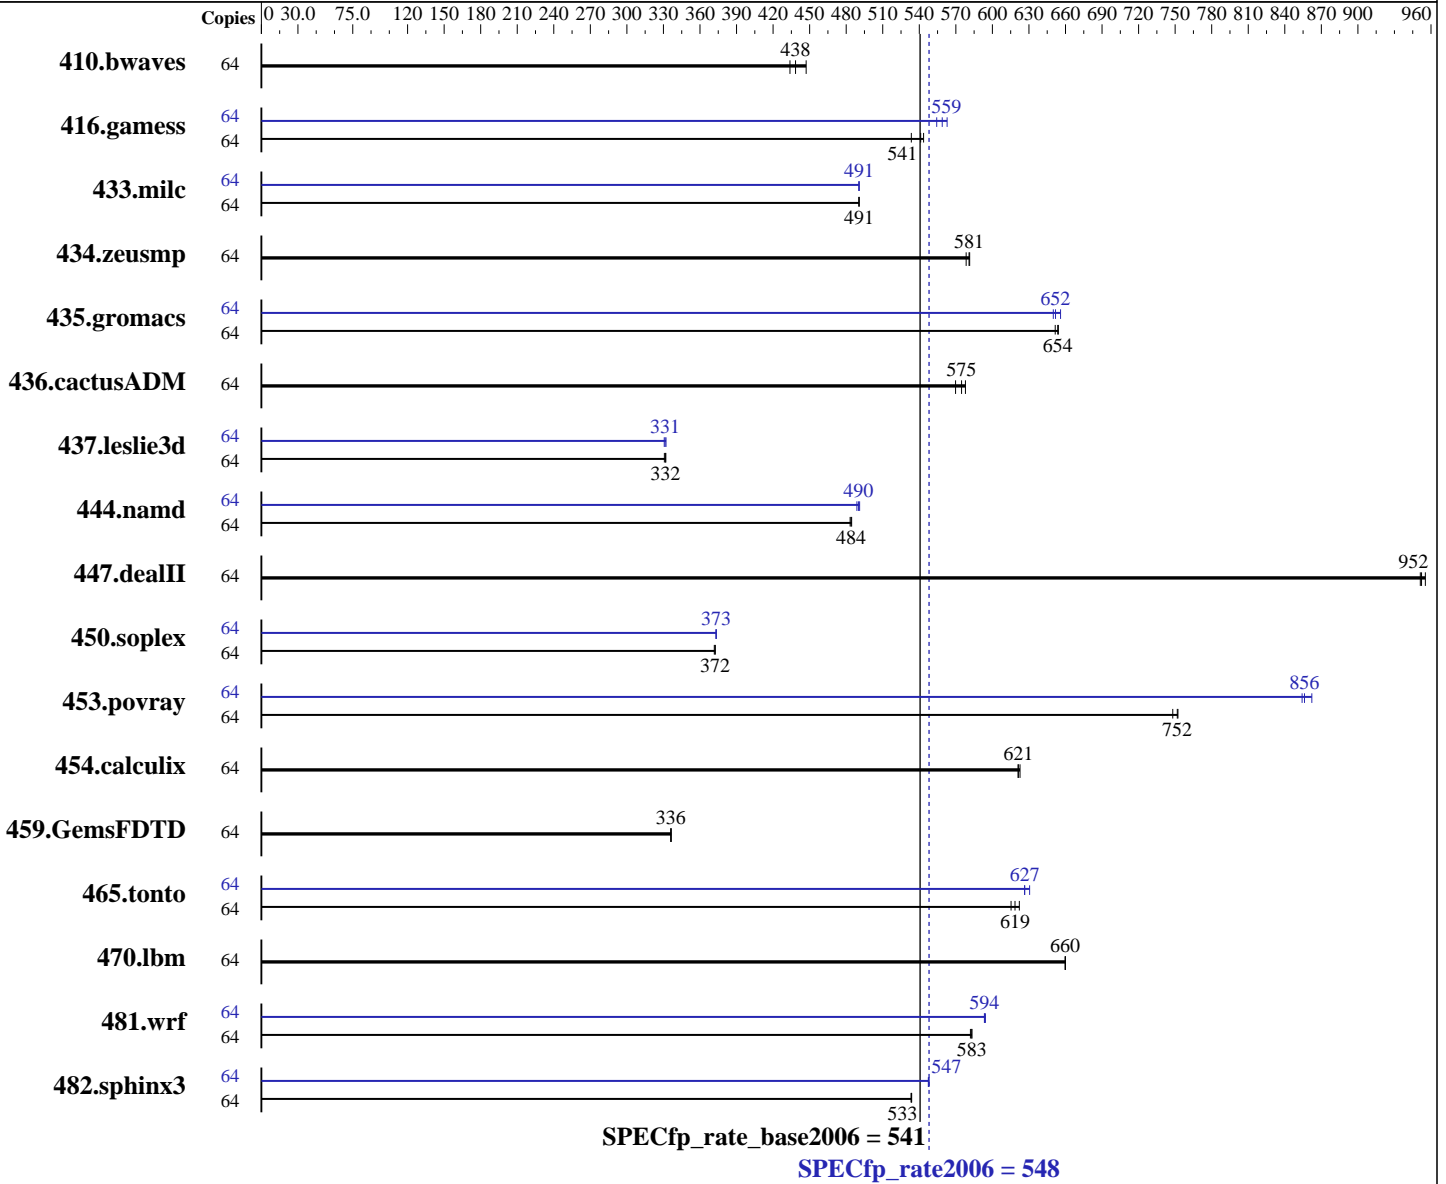

Hardware

CPU Name: Intel Xeon E7-4820
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux;
 Fortran: Version 13.0.0.079 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = **548**

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = **541**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 978 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	1945	447	1984	438	2005	434	64	1945	447	1984	438	2005	434		
416.gamess	64	2349	533	2306	544	2316	541	64	2261	554	2242	559	2226	563		
433.milc	64	1198	491	1198	490	1198	491	64	1198	491	1198	490	1198	491		
434.zeusmp	64	1002	581	1003	581	1007	578	64	1002	581	1003	581	1007	578		
435.gromacs	64	701	652	699	654	699	654	64	703	650	697	656	701	652		
436.cactusADM	64	1323	578	1331	575	1342	570	64	1323	578	1331	575	1342	570		
437.leslie3d	64	1813	332	1819	331	1813	332	64	1815	331	1819	331	1811	332		
444.namd	64	1059	484	1061	484	1062	483	64	1047	490	1050	489	1045	491		
447.dealII	64	769	952	766	955	770	951	64	769	952	766	955	770	951		
450.soplex	64	1436	372	1433	372	1433	372	64	1430	373	1430	373	1430	373		
453.povray	64	453	752	453	752	455	748	64	395	862	398	856	399	854		
454.calculix	64	850	621	850	621	848	623	64	850	621	850	621	848	623		
459.GemsFDTD	64	2020	336	2019	336	2021	336	64	2020	336	2019	336	2021	336		
465.tonto	64	1018	619	1023	615	1012	622	64	1005	626	1005	627	999	631		
470.lbm	64	1333	660	1333	660	1333	660	64	1333	660	1333	660	1333	660		
481.wrf	64	1226	583	1226	583	1228	582	64	1203	594	1204	594	1205	593		
482.sphinx3	64	2337	534	2339	533	2338	533	64	2278	547	2278	547	2276	548		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

Platform Notes

BIOS configuration:

Power Technology set to Custom, Performance/Watt set to Traditional
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ 5569a0425e2ad530534e4c79a46e4d28
running on RH5885-24 Tue Jan 29 04:59:54 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7- 4820 @ 2.00GHz
 4 "physical id"s (chips)
 64 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 8
siblings       : 16
physical 0:    cores 0 1 2 8 17 18 24 25
physical 1:    cores 0 1 2 8 17 18 24 25
physical 2:    cores 0 1 2 8 17 18 24 25
physical 3:    cores 0 1 2 8 17 18 24 25
cache size     : 18432 KB
```

From /proc/meminfo

```
MemTotal:      1058805592 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux RH5885-24 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 1 20:27

SPEC is set to: /home/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh588524-lv_home
                ext4      409G   69G  320G  18% /home
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. RGPUC-BIOS-V023 12/17/2012
```

Memory:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

Platform Notes (Continued)

64x 16 GB
64x Hyundai HMT42GR7BMR4C-H9 16 GB 978 MHz 4 rank

(End of data from sysinfo program)

Descriptions about memory generated by sysinfo are not correct, only 64 DIMMs are installed not 128, see descriptions below.

Memory:

64x Hyundai HMT42GR7BMR4C-H9 16 GB 978 MHz 4 rank

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 4x Xeon E7-8870 CPU + 1024GB memory using RHEL6.2

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Oct-2012

Tested by: Huawei

Software Availability: Oct-2012

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -static -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 548

Tecal RH5885 V2 (Intel Xeon E7-4820)

SPECfp_rate_base2006 = 541

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2013

Hardware Availability: Oct-2012

Software Availability: Oct-2012

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:20:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 February 2013.