



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Sep-2013

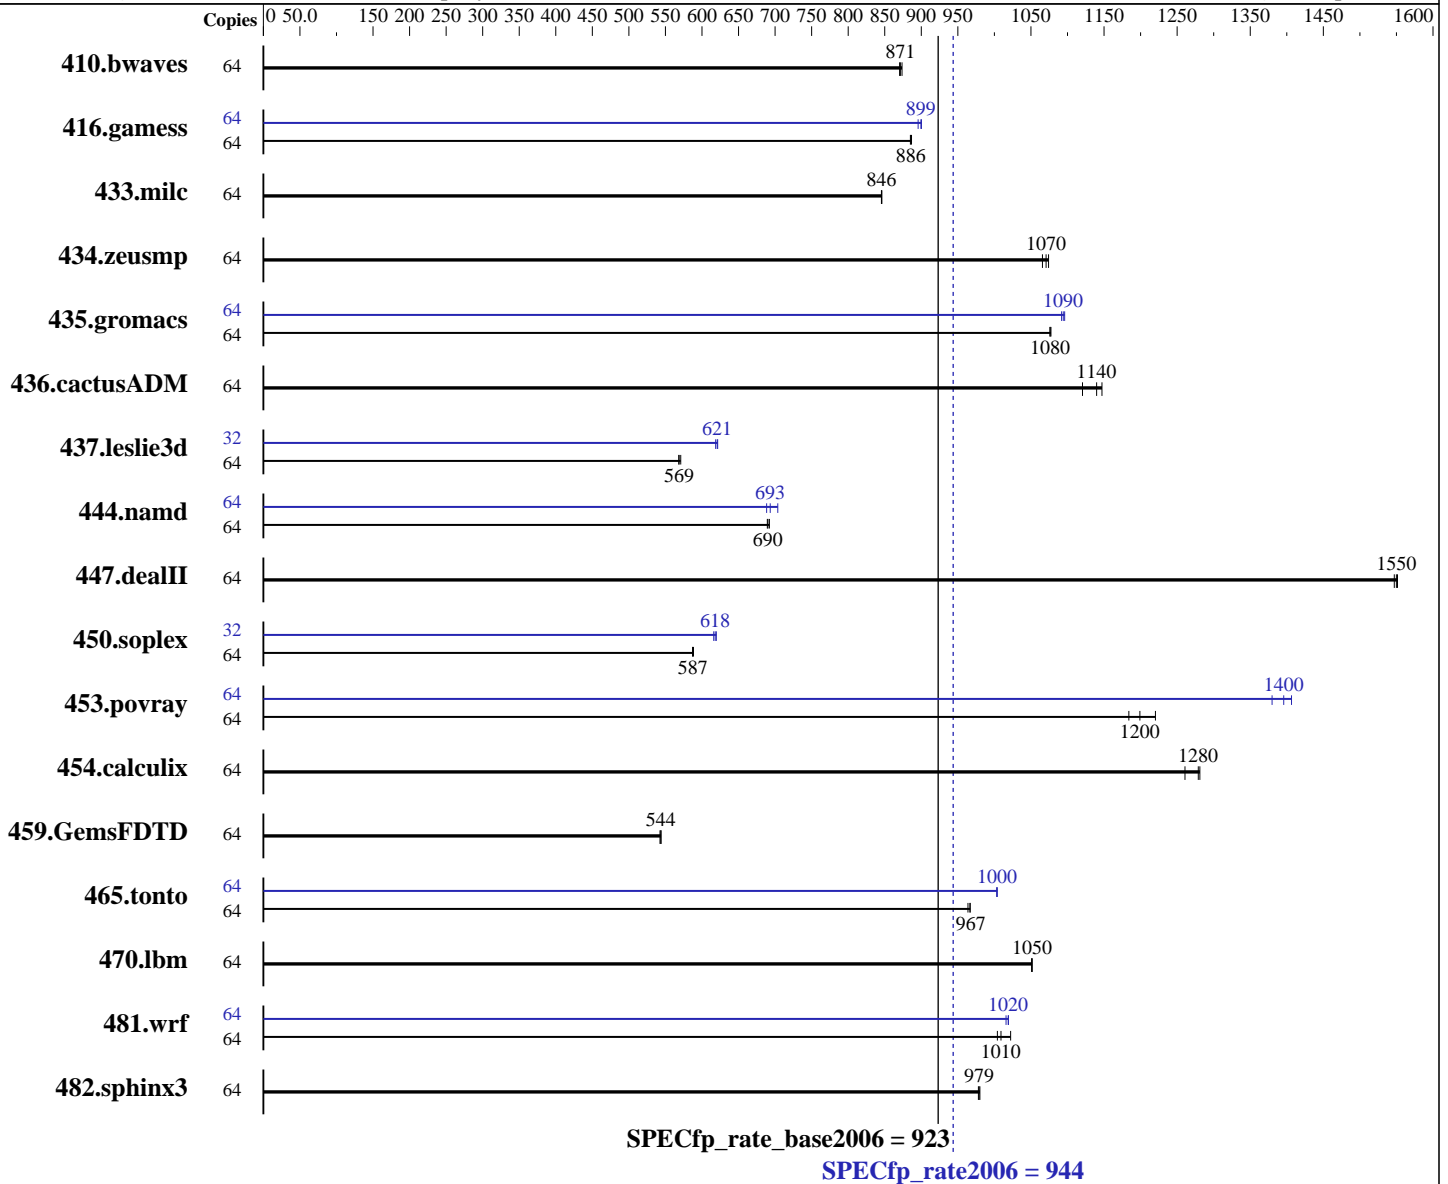

Hardware

CPU Name: Intel Xeon E5-4610 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
Disk Subsystem: 1 x 300 GB 15 K SAS, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	998	871	999	870	996	874	64	998	871	999	870	996	874
416.gamess	64	1416	885	1413	887	1415	886	64	1392	900	1393	899	1399	896
433.milc	64	695	846	695	846	695	845	64	695	846	695	846	695	845
434.zeusmp	64	544	1070	542	1070	546	1070	64	544	1070	542	1070	546	1070
435.gromacs	64	425	1080	425	1080	424	1080	64	418	1090	417	1100	418	1090
436.cactusADM	64	667	1150	683	1120	671	1140	64	667	1150	683	1120	671	1140
437.leslie3d	64	1059	568	1058	569	1054	571	32	485	621	484	621	486	619
444.namd	64	745	689	744	690	741	692	64	740	693	729	704	746	688
447.dealII	64	472	1550	473	1550	472	1550	64	472	1550	473	1550	472	1550
450.soplex	64	909	587	909	587	907	588	32	433	616	431	620	432	618
453.povray	64	284	1200	279	1220	288	1180	64	244	1400	242	1410	247	1380
454.calculix	64	413	1280	419	1260	412	1280	64	413	1280	419	1260	412	1280
459.GemsFDTD	64	1252	543	1248	544	1249	544	64	1252	543	1248	544	1249	544
465.tonto	64	653	964	652	967	651	967	64	627	1000	628	1000	628	1000
470.lbm	64	837	1050	836	1050	836	1050	64	837	1050	836	1050	836	1050
481.wrf	64	712	1000	699	1020	708	1010	64	704	1020	701	1020	702	1020
482.sphinx3	64	1273	980	1274	979	1275	978	64	1273	980	1274	979	1275	978

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

Operating System Notes (Continued)

Disabled unused Linux services through "stop_services.sh" before running.

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on BL660c-Gen8 Wed Feb 12 23:49:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4610 v2 @ 2.30GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

From /proc/meminfo

```
MemTotal:      264633624 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux BL660c-Gen8 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 12 10:09

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	273G	68G	192G	27%	/

Additional information from dmidecode:

BIOS HP I32 01/20/2014

Memory:

32x HP 712382-071 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

32x HP 712382-071 8 GB 1600 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 944

ProLiant BL660c Gen8
(2.30 GHz, Intel Xeon E5-4610 v2)

SPECfp_rate_base2006 = 923

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:32:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.