



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3


Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

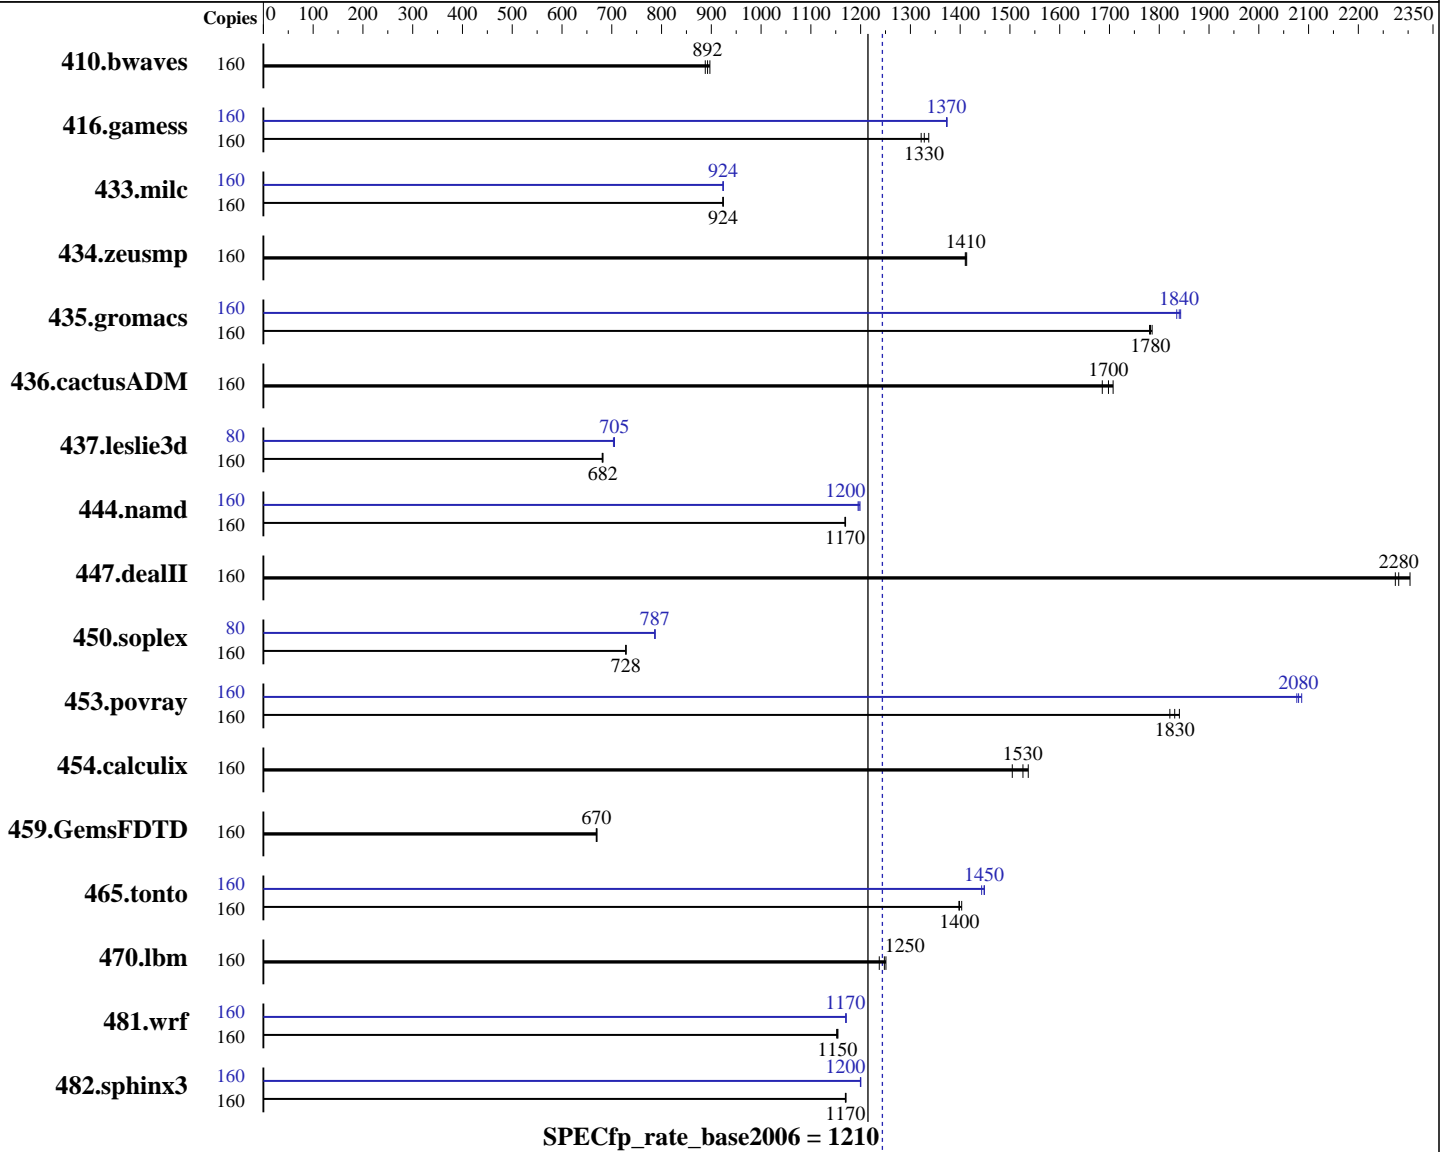

Hardware

CPU Name: Intel Xeon E7-2850
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (128 x 16 GB 2Rx4 PC3L-10600R-9, ECC, running at 1066 MHz and CL7)
Disk Subsystem: 4 x 300 GB 15 K SAS, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	2424	897	2449	888	2436	892	160	2424	897	2449	888	2436	892
416.gamess	160	2370	1320	2359	1330	2343	1340	160	2282	1370	2280	1370	2282	1370
433.milc	160	1590	924	1591	923	1590	924	160	1589	924	1590	924	1590	924
434.zeusmp	160	1032	1410	1032	1410	1030	1410	160	1032	1410	1032	1410	1030	1410
435.gromacs	160	641	1780	640	1790	642	1780	160	621	1840	620	1840	623	1840
436.cactusADM	160	1134	1690	1126	1700	1120	1710	160	1134	1690	1126	1700	1120	1710
437.leslie3d	160	2206	682	2209	681	2205	682	80	1066	705	1069	703	1066	705
444.namd	160	1098	1170	1097	1170	1098	1170	160	1072	1200	1070	1200	1074	1190
447.dealII	160	795	2300	805	2270	802	2280	160	795	2300	805	2270	802	2280
450.soplex	160	1833	728	1831	729	1832	728	80	848	787	848	787	849	786
453.povray	160	463	1840	465	1830	467	1820	160	408	2090	409	2080	410	2080
454.calculix	160	865	1530	859	1540	877	1500	160	865	1530	859	1540	877	1500
459.GemsFDTD	160	2538	669	2535	670	2533	670	160	2538	669	2535	670	2533	670
465.tonto	160	1127	1400	1126	1400	1122	1400	160	1091	1440	1087	1450	1087	1450
470.lbm	160	1777	1240	1762	1250	1758	1250	160	1777	1240	1762	1250	1758	1250
481.wrf	160	1548	1150	1549	1150	1552	1150	160	1527	1170	1526	1170	1527	1170
482.sphinx3	160	2665	1170	2664	1170	2667	1170	160	2598	1200	2599	1200	2600	1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Jul-2013
Software Availability: Sep-2013

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Collaborative Power Control set to Disabled
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set so Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on hd70.epc.external.hp.com Wed Apr 30 12:08:36 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7- 2850 @ 2.00GHz
 8 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 10
siblings       : 20
physical 0:    : cores 0 1 2 3 4 5 6 7 8 9
physical 1:    : cores 0 1 2 3 4 5 6 7 8 9
physical 2:    : cores 0 1 2 3 4 5 6 7 8 9
physical 3:    : cores 0 1 2 3 4 5 6 7 8 9
physical 4:    : cores 0 1 2 3 4 5 6 7 8 9
physical 5:    : cores 0 1 2 3 4 5 6 7 8 9
physical 6:    : cores 0 1 2 3 4 5 6 7 8 9
physical 7:    : cores 0 1 2 3 4 5 6 7 8 9
cache size     : 24576 KB
```

From /proc/meminfo

```
MemTotal:      2117632736 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux hd70.epc.external.hp.com 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 30 11:57

SPEC is set to: /home/cpu2006

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Jul-2013
Software Availability: Sep-2013

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/vg_hd70-lv_home	ext4	497G	144G	328G	31%	/home

Additional information from dmidecode:
BIOS HP P66 07/29/2013
Memory:
128x Not Specified Not Specified 16 GB 1066 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jul-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1240

ProLiant DL980 G7
(2.00 GHz, Intel Xeon E7-2850)

SPECfp_rate_base2006 = 1210

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Jul-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:05:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 May 2014.