



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55


Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

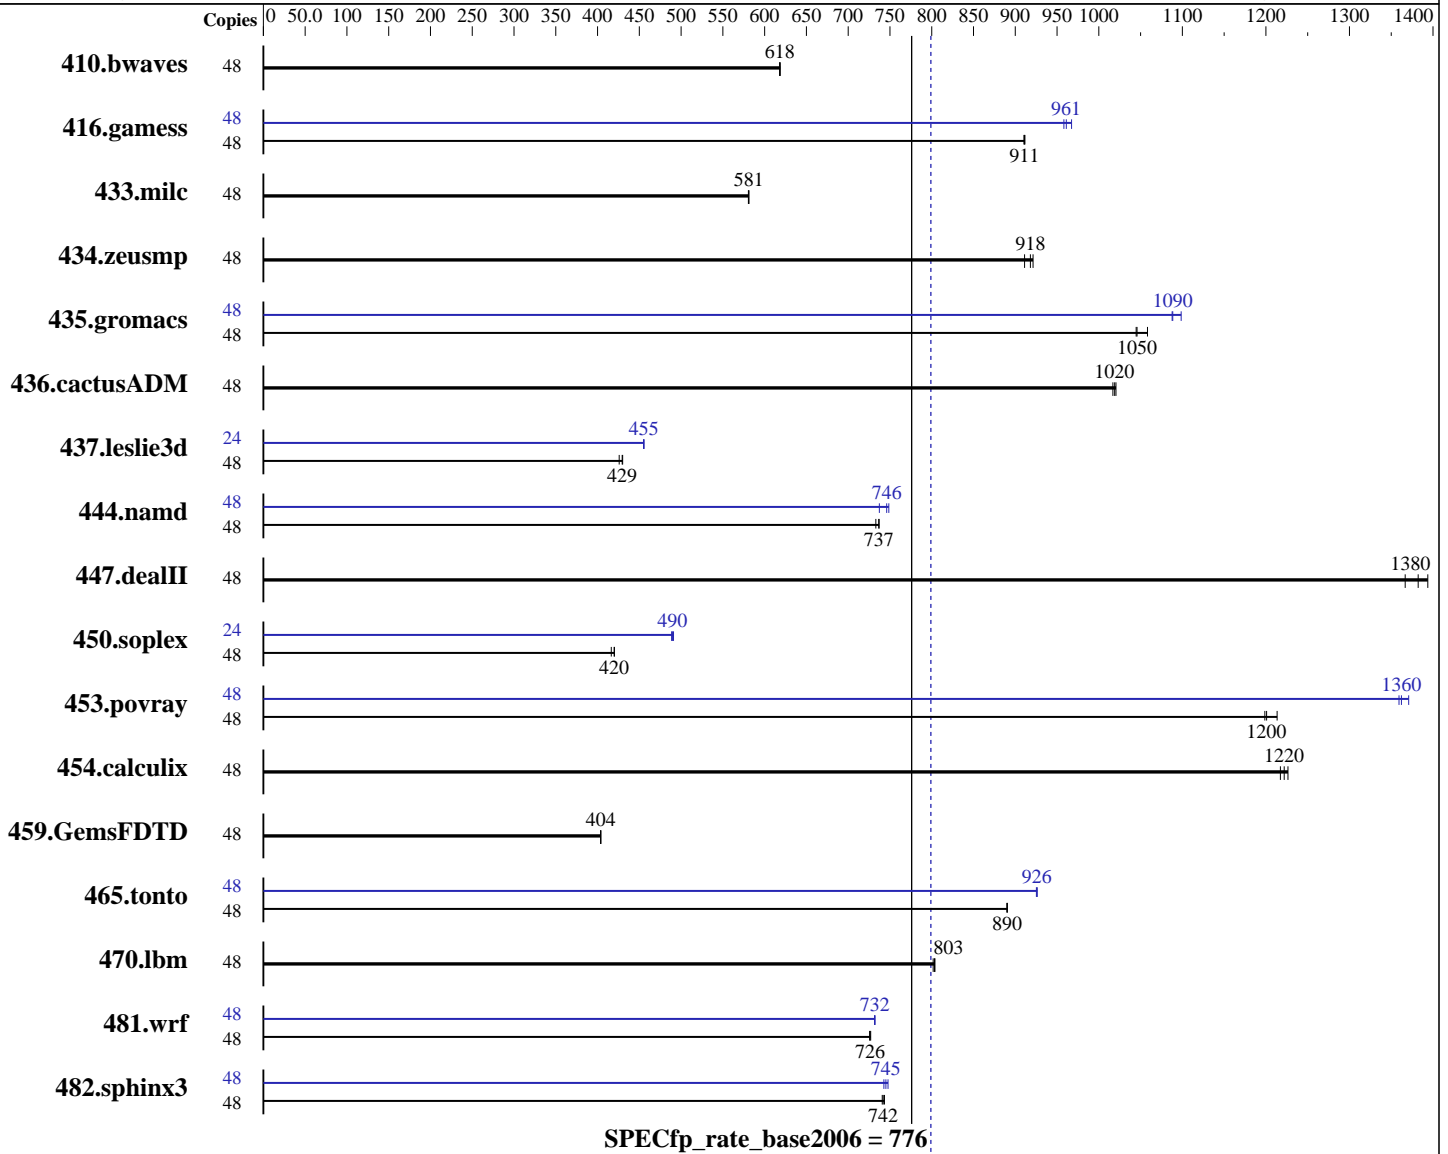

### Hardware

CPU Name: Intel Xeon E5-2690 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1056	618	<b>1055</b>	<b>618</b>	1054	619	48	1056	618	<b>1055</b>	<b>618</b>	1054	619
416.gamess	48	<b>1032</b>	<b>911</b>	1032	910	1031	912	48	981	958	<b>978</b>	<b>961</b>	972	967
433.milc	48	759	581	758	581	<b>758</b>	<b>581</b>	48	759	581	758	581	<b>758</b>	<b>581</b>
434.zeusmp	48	474	921	<b>476</b>	<b>918</b>	479	911	48	474	921	<b>476</b>	<b>918</b>	479	911
435.gromacs	48	<b>328</b>	<b>1050</b>	324	1060	328	1040	48	312	1100	<b>315</b>	<b>1090</b>	315	1090
436.cactusADM	48	<b>563</b>	<b>1020</b>	564	1020	562	1020	48	<b>563</b>	<b>1020</b>	564	1020	562	1020
437.leslie3d	48	<b>1051</b>	<b>429</b>	1059	426	1049	430	24	<b>496</b>	<b>455</b>	496	455	495	456
444.namd	48	<b>523</b>	<b>737</b>	525	733	522	737	48	522	737	514	749	<b>516</b>	<b>746</b>
447.dealII	48	<b>397</b>	<b>1380</b>	402	1370	394	1390	48	<b>397</b>	<b>1380</b>	402	1370	394	1390
450.soplex	48	953	420	961	416	<b>953</b>	<b>420</b>	24	408	491	410	489	<b>409</b>	<b>490</b>
453.povray	48	213	1200	<b>213</b>	<b>1200</b>	210	1210	48	188	1360	186	1370	<b>187</b>	<b>1360</b>
454.calculix	48	<b>324</b>	<b>1220</b>	323	1230	325	1220	48	<b>324</b>	<b>1220</b>	323	1230	325	1220
459.GemsFDTD	48	1261	404	<b>1261</b>	<b>404</b>	1261	404	48	1261	404	<b>1261</b>	<b>404</b>	1261	404
465.tonto	48	<b>530</b>	<b>890</b>	531	890	530	890	48	510	925	<b>510</b>	<b>926</b>	510	926
470.lbm	48	820	804	<b>821</b>	<b>803</b>	823	802	48	820	804	<b>821</b>	<b>803</b>	823	802
481.wrf	48	738	727	739	726	<b>738</b>	<b>726</b>	48	<b>733</b>	<b>732</b>	732	732	733	732
482.sphinx3	48	<b>1261</b>	<b>742</b>	1263	741	1258	743	48	1251	748	1260	743	<b>1256</b>	<b>745</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Snoop Mode set to Cluster on Die  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

## Platform Notes (Continued)

```

Execute Disable disabled
System Profile set to Custom
Memory Patrol Scrub set to Disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Nov 7 20:33:28 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v3 @ 2.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      132054288 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 7 09:45

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  271G  9.7G  248G   4% /

```

Additional information from dmidecode:

```

BIOS Dell Inc. 1.0.0 10/15/2014
Memory:
4x 000000000000 Not Specified 2133 MHz 1 rank
8x 002C00B3002C 36ASF2G72PZ-2G1A2 16 GB 2133 MHz 2 rank

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
             -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
          -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2)
            -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
            -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2)
            -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
            -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 799

PowerEdge R430 (Intel Xeon E5-2690 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 776

CPU2006 license: 55

Test date: Nov-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:30:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.