



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp®2006 = 109

SPECfp\_base2006 = 103

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

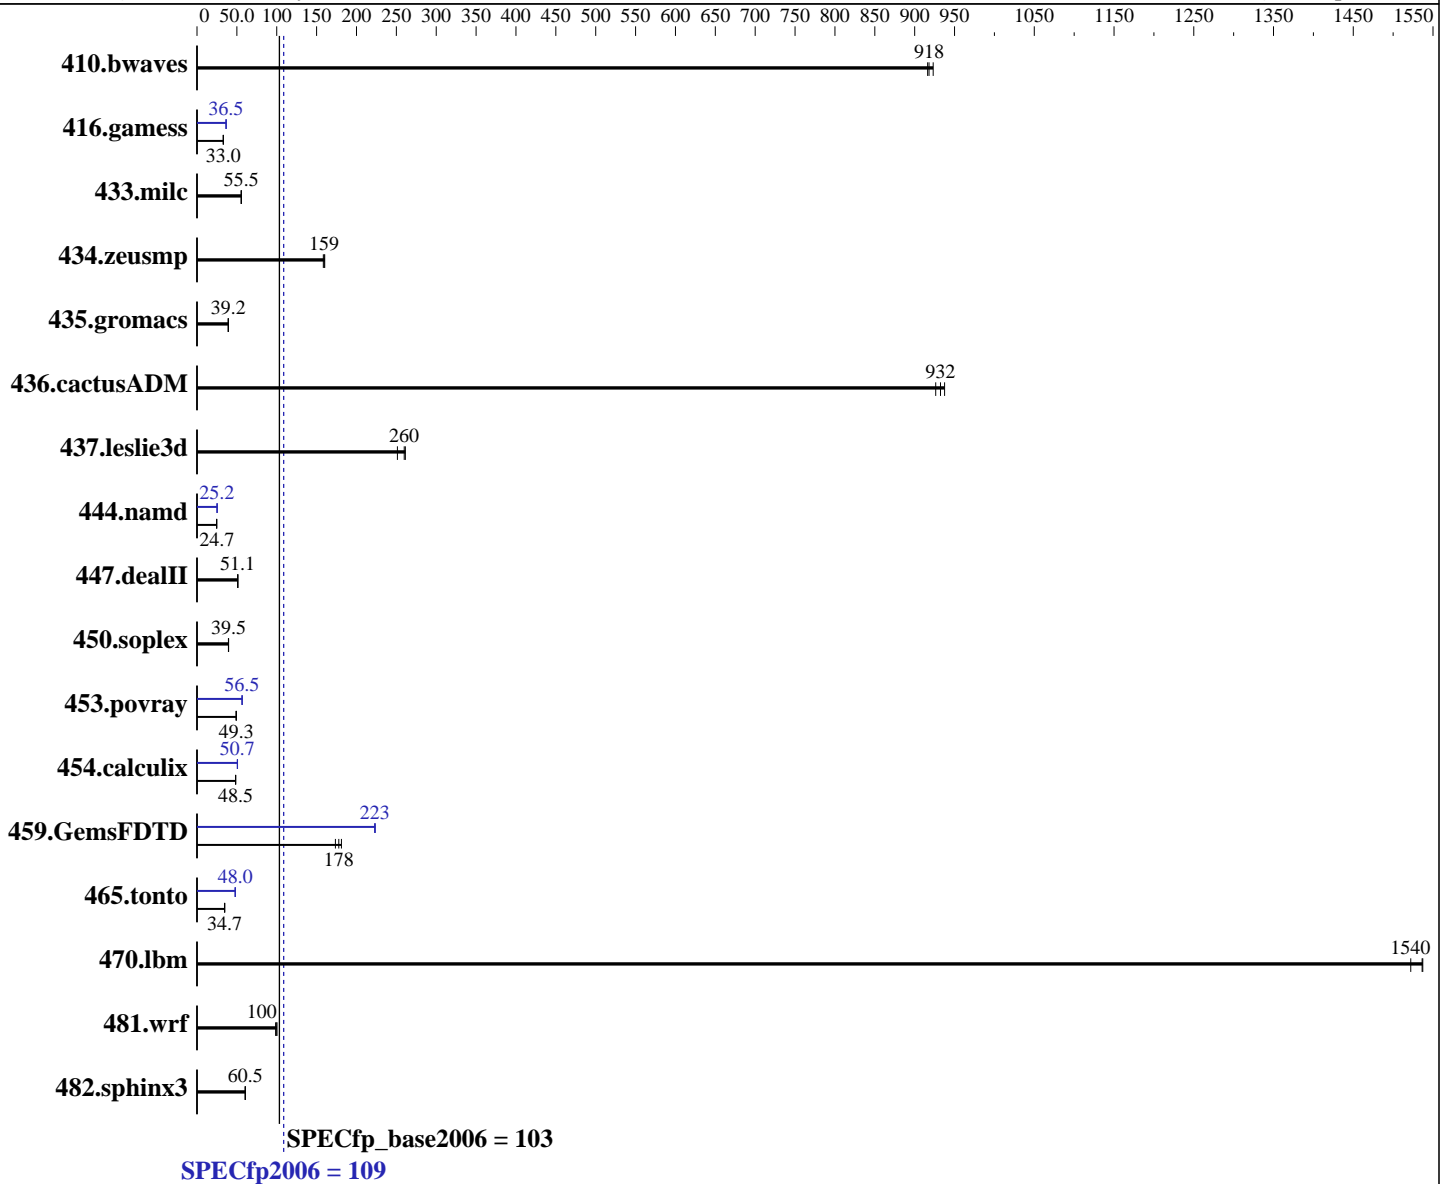

SPECfp\_base2006 = 103

SPECfp2006 = 109

### Hardware

CPU Name: Intel Xeon E7-4830 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64) 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp2006 = 109

SPECfp\_base2006 = 103

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)  
Disk Subsystem: 1 x 400 GB SAS SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.8	916	<b>14.8</b>	<b>918</b>	14.7	923	14.8	916	<b>14.8</b>	<b>918</b>	14.7	923
416.gamess	592	33.1	<b>593</b>	<b>33.0</b>	595	32.9	<b>536</b>	<b>36.5</b>	538	36.4	535	36.6
433.milc	165	55.5	<b>165</b>	<b>55.5</b>	165	55.6	165	55.5	<b>165</b>	<b>55.5</b>	165	55.6
434.zeusmp	56.8	160	<b>57.1</b>	<b>159</b>	57.4	158	56.8	160	<b>57.1</b>	<b>159</b>	57.4	158
435.gromacs	182	39.3	<b>182</b>	<b>39.2</b>	182	39.2	182	39.3	<b>182</b>	<b>39.2</b>	182	39.2
436.cactusADM	<b>12.8</b>	<b>932</b>	12.9	926	12.7	938	<b>12.8</b>	<b>932</b>	12.9	926	12.7	938
437.leslie3d	37.4	251	36.0	261	<b>36.2</b>	<b>260</b>	37.4	251	36.0	261	<b>36.2</b>	<b>260</b>
444.namd	<b>325</b>	<b>24.7</b>	325	24.7	325	24.7	318	25.2	318	25.2	<b>318</b>	<b>25.2</b>
447.dealII	<b>224</b>	<b>51.1</b>	224	51.2	224	51.1	<b>224</b>	<b>51.1</b>	224	51.2	224	51.1
450.soplex	210	39.6	<b>211</b>	<b>39.5</b>	212	39.4	210	39.6	<b>211</b>	<b>39.5</b>	212	39.4
453.povray	108	49.4	109	48.9	<b>108</b>	<b>49.3</b>	93.8	56.7	94.1	56.5	<b>94.1</b>	<b>56.5</b>
454.calculix	<b>170</b>	<b>48.5</b>	170	48.4	170	48.5	163	50.5	162	50.8	<b>163</b>	<b>50.7</b>
459.GemsFDTD	61.1	174	<b>59.7</b>	<b>178</b>	58.6	181	47.6	223	<b>47.5</b>	<b>223</b>	47.5	224
465.tonto	<b>283</b>	<b>34.7</b>	285	34.5	283	34.8	206	47.9	<b>205</b>	<b>48.0</b>	205	48.0
470.lbm	9.03	1520	8.94	1540	<b>8.94</b>	<b>1540</b>	9.03	1520	8.94	1540	<b>8.94</b>	<b>1540</b>
481.wrf	111	100	<b>112</b>	<b>100</b>	113	98.5	111	100	<b>112</b>	<b>100</b>	113	98.5
482.sphinx3	321	60.6	323	60.4	<b>322</b>	<b>60.5</b>	321	60.6	323	60.4	<b>322</b>	<b>60.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Intel Hyper-Threading Technology option set to Disabled  
CPU performance set to Enterprise  
Power Technology set to Energy Efficient  
Energy Performance BIAS setting set to Balanced Performance  
Memory RAS configuration set to Maximum Performance  
Memory Power Saving Mode set to Disabled  
QPI Snoop Mode set to Home Directory Snoop with OSB  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp2006 = 109

SPECfp\_base2006 = 103

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** May-2017  
**Hardware Availability:** Apr-2016  
**Software Availability:** Sep-2016

### Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-3y2r Sun May 7 12:36:09 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4830 v4 @ 2.00GHz
 4 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 14
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

```
From /proc/meminfo
MemTotal:      1058510992 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-3y2r 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 2 22:08
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp2006 = 109

SPECfp\_base2006 = 103

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

### Platform Notes (Continued)

/dev/sda1 xfs 373G 21G 352G 6% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. EXM4.3.1.2c.0.080220161434 08/02/2016

Memory:

32x 0xCE00 M393A4K40BB0-CPB 32 GB 2 rank 2133 MHz, configured at 1333 MHz  
64x NO DIMM NO DIMM 2400 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh10.2"

OMP\_NUM\_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp2006 = 109

SPECfp\_base2006 = 103

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

## Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

**SPECfp2006 = 109**

**SPECfp\_base2006 = 103**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** May-2017

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2016

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-4830 v4 2.00 GHz)

SPECfp2006 = 109

SPECfp\_base2006 = 103

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 30 15:32:04 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 May 2017.