SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

Hewlett-Packard
HP Visualize B132L

SPECweb96= 502

Test Date : Jan-97

Tested by : HP Cupertino, CA.

Hardware Avail:	Jun-97	OS Avail:	Feb-97	HTTP Software Avail:	Jan-97	SPEC license #:	6

Throughput ops/sec	Response msec
50	8.5
101	9.3
151	10.7
202	13.4
252	15.2
303	19.0
353	23.4
405	31.3
454	37.8
488	63.6
489	64.4
502	69.2

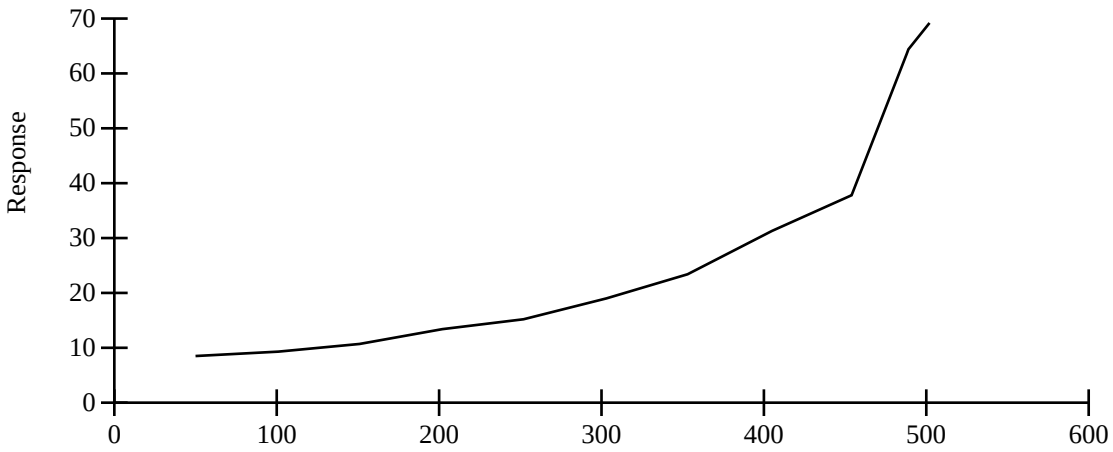

Hardware

Model Name:	HP Visualize B132L
Processor:	132 MHz PA-7300LC
# of Processors:	1
Primary Cache:	64KB(I+D) on chip
Secondary Cache:	1MB(I+D) off chip
Other Cache:	None
Memory:	384 MB
Disk Subsystem:	1 2GB FWD-SCSI (Option N)
Disk Controllers:	Built-in FWD SCSI
Other Hardware:	None

Software

Operating System:	HP-UX B.10.20
File System:	HFS
Other Software:	PHNE_9107

HTTP Software

Vendor:	Zeus Technology, Ltd.
HTTP Software:	Zeus 1.1.5
# of "threads":	3
Server Cache:	Default
Log Mode:	Commmon

Network

# of Controllers:	1
Network Controllers:	HP B5509AA 100Base-T PCI LAN Adapter
# of Nets:	1
Type of Nets:	100Base-TX
Network Speed:	100 Mbit
Time Wait (secs):	60 (Non RFC1122)

Load Generators

# of Load Generators:	3
# of Processes Each:	16
Model:	HP 9000 H50
Processor:	96 MHz PA-7100
# of CPUs:	1
Memory:	256 MB
OS:	HP-UX B.10.10
Compiler:	HP92453-01 A.10.32.03 HP C Compiler

Benchmark Configuration

Max Requested Load:	505
Max Fileset Size (MB):	493

Notes/Tuning Information

```
dbc_max_pct 5, ninode 8192, maxdsiz 0x08000000
adb tcp_hash_size 4096, so_qlimit_max 0x100
nettune ip_intrqmax 100
workload files set to 0755 permissions
Clients were on FDDI and joined to the server with a 3Com LANPlex 6004
Zeus software started -b 700000 -t 900 -l 200 -q
B132L available today; B5509AA available Jun-97
```

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@specbench.org
http://www.specbench.org/