



# SPEC<sup>®</sup> ACCEL\_ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

## NVIDIA Tesla K20


## Cray XK7

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 1.77

ACCEL license: 3440A  
Test sponsor: Indiana University  
Tested by: Indiana University

Test date: Aug-2014  
Hardware Availability: Apr-2013  
Software Availability: Feb-2014

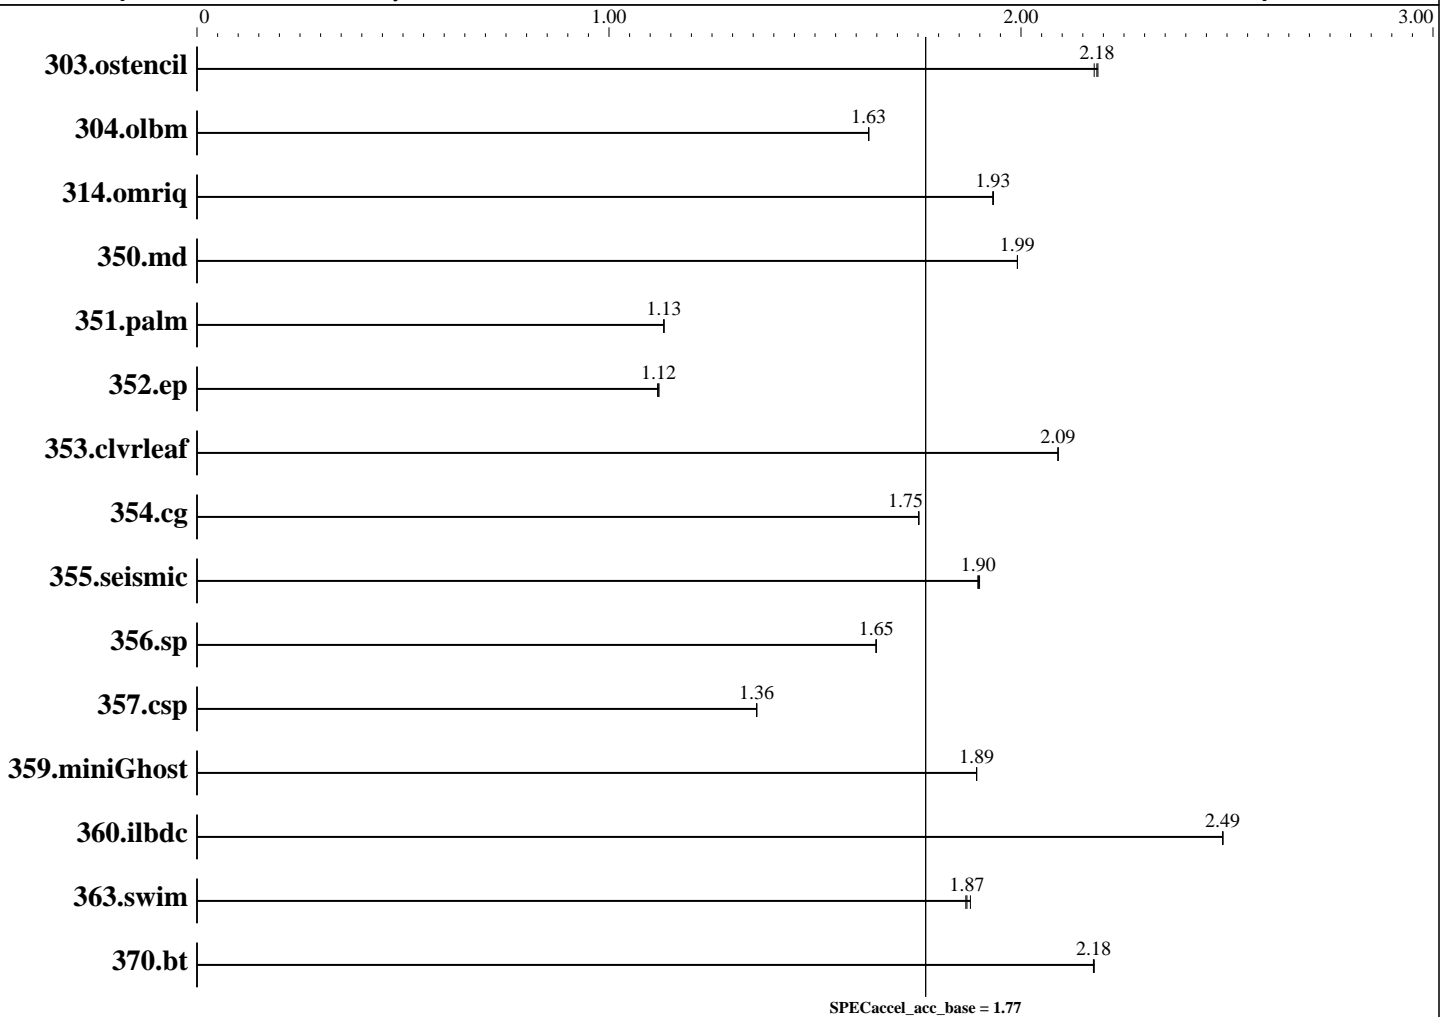

### Hardware

CPU Name: AMD Opteron 6276  
 CPU Characteristics: AMD Turbo CORE Technology up to 3.2GHz, Turbo CORE off  
 CPU MHz: 2300  
 CPU MHz Maximum: 3200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Continued on next page

### Accelerator

Accel Model Name: Tesla K20  
 Accel Vendor: NVIDIA  
 Accel Name: NVIDIA Tesla K20  
 Type of Accel: GPU  
 Accel Connection: PCIe 2.0 16x  
 Does Accel Use ECC: yes  
 Accel Description: NVIDIA Tesla K20m GPU, 2496 CUDA cores, 706MHz, 5 GB GDDR5 RAM  
 Accel Driver: NVIDIA UNIX x86\_64 Kernel Module 319.82



# SPEC ACCEL\_ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

**Cray**

(Test Sponsor: Indiana University)

**NVIDIA Tesla K20**

**Cray XK7**

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 1.77

**ACCEL license:** 3440A  
**Test sponsor:** Indiana University  
**Tested by:** Indiana University

**Test date:** Aug-2014  
**Hardware Availability:** Apr-2013  
**Software Availability:** Feb-2014

**Other Cache:** None  
**Memory:** 32 GB (4 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
**Disk Subsystem:** None  
**Other Hardware:** None

## Software

**Operating System:** SUSE Linux Enterprise Server 11 (x86\_64), Cray Linux Environment 4.2  
SUSE Linux Enterprise Server 11 (x86\_64)  
2.6.32.59-0.7.1\_1.0402.7496-cray\_gem\_c  
**Compiler:** PGI Accelerator Fortran/C/C++ Server, Release 14.3  
**File System:** NFSv3 (IBM N5500 NAS) over Gb ethernet  
**System State:** Multi-user, run level 3  
**Other Software:** NVIDIA CUDA 5.5.20



# SPEC ACCEL\_ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

## NVIDIA Tesla K20

## Cray XK7

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 1.77

ACCEL license: 3440A  
Test sponsor: Indiana University  
Tested by: Indiana University

Test date: Aug-2014  
Hardware Availability: Apr-2013  
Software Availability: Feb-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
303.ostencil	<b>66.4</b>	<b>2.18</b>	66.6	2.18	66.3	2.19						
304.olbm	279	1.63	<b>279</b>	<b>1.63</b>	279	1.63						
314.omriq	495	1.93	494	1.93	<b>495</b>	<b>1.93</b>						
350.md	127	1.99	<b>127</b>	<b>1.99</b>	127	1.99						
351.palm	327	1.13	326	1.13	<b>327</b>	<b>1.13</b>						
352.ep	474	1.12	473	1.12	<b>473</b>	<b>1.12</b>						
353.clvleaf	213	2.09	<b>213</b>	<b>2.09</b>	213	2.09						
354.cg	<b>233</b>	<b>1.75</b>	233	1.75	233	1.75						
355.seismic	195	1.90	<b>195</b>	<b>1.90</b>	195	1.90						
356.sp	<b>167</b>	<b>1.65</b>	167	1.65	167	1.65						
357.csp	<b>199</b>	<b>1.36</b>	199	1.36	199	1.36						
359.miniGhost	<b>195</b>	<b>1.89</b>	195	1.89	195	1.89						
360.ilbdc	<b>147</b>	<b>2.49</b>	147	2.49	147	2.49						
363.swim	123	1.88	123	1.87	<b>123</b>	<b>1.87</b>						
370.bt	102	2.18	<b>102</b>	<b>2.18</b>	102	2.18						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```
Sysinfo program /N/soft/mason/specaccel-1.0/Docs/sysinfo
$Rev: 6874 $ $Date:: 2013-11-20 #$ 0953404ef7e75a5f9bbb534c6de3f831
running on nid00696 Mon Aug 18 10:00:38 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD Opteron(TM) Processor 6276
1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 2048 KB
```

From /proc/meminfo

Continued on next page



# SPEC ACCEL\_ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

**Cray**

(Test Sponsor: Indiana University)

**NVIDIA Tesla K20**

**Cray XK7**

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 1.77

ACCEL license: 3440A  
Test sponsor: Indiana University  
Tested by: Indiana University

Test date: Aug-2014  
Hardware Availability: Apr-2013  
Software Availability: Feb-2014

## Platform Notes (Continued)

MemTotal: 33084584 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 1
```

```
mazama-release:
Mazama Wed Aug 28 02:06:30 CDT 2013 on hssbld0 by bwdev
lsb-cray-mazama-7.1.0
```

```
uname -a:
Linux nid00696 2.6.32.59-0.7.1_1.0402.7496-cray_gem_c #1 SMP Wed Feb 26
05:58:57 UTC 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
SPEC is set to: /N/soft/mason/specaccel-1.0
Filesystem Type Size Used Avail Use% Mounted on
/N/soft dvs 1.9T 1.6T 265G 86% /N/soft
```

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

## Base Compiler Invocation

C benchmarks:  
pgcc

Fortran benchmarks:  
pgfortran

Benchmarks using both Fortran and C:  
pgcc pgfortran

## Base Optimization Flags

C benchmarks:  
-fast -Mfprelaxed -acc -ta=tesla:cc35 -ta=tesla:cuda5.5

Continued on next page



# SPEC ACCEL\_ACC Result

Copyright 2014-2015 Standard Performance Evaluation Corporation

**Cray**

(Test Sponsor: Indiana University)

**NVIDIA Tesla K20**

**Cray XK7**

SPECaccel\_acc\_peak = Not Run

SPECaccel\_acc\_base = 1.77

**ACCEL license:** 3440A  
**Test sponsor:** Indiana University  
**Tested by:** Indiana University

**Test date:** Aug-2014  
**Hardware Availability:** Apr-2013  
**Software Availability:** Feb-2014

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-fast -Mfprelaxed -acc -ta=tesla:cc35 -ta=tesla:cuda5.5`

Benchmarks using both Fortran and C:

`353.civrleaf: -fast -Mfprelaxed -acc -ta=tesla:cc35 -ta=tesla:cuda5.5`

`359.miniGhost: -fast -Mfprelaxed -acc -ta=tesla:cc35 -ta=tesla:cuda5.5  
-Mnomain`

The flags file that was used to format this result can be browsed at

[http://www.spec.org/accel/flags/pgi2014\\_flags.html](http://www.spec.org/accel/flags/pgi2014_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/accel/flags/pgi2014\\_flags.xml](http://www.spec.org/accel/flags/pgi2014_flags.xml)

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC ACCEL v1.0.  
Report generated on Tue Mar 3 14:21:45 2015 by SPEC ACCEL PS/PDF formatter v1212.  
Originally published on 17 September 2014.