



SPEC ACCEL™ OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation


Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

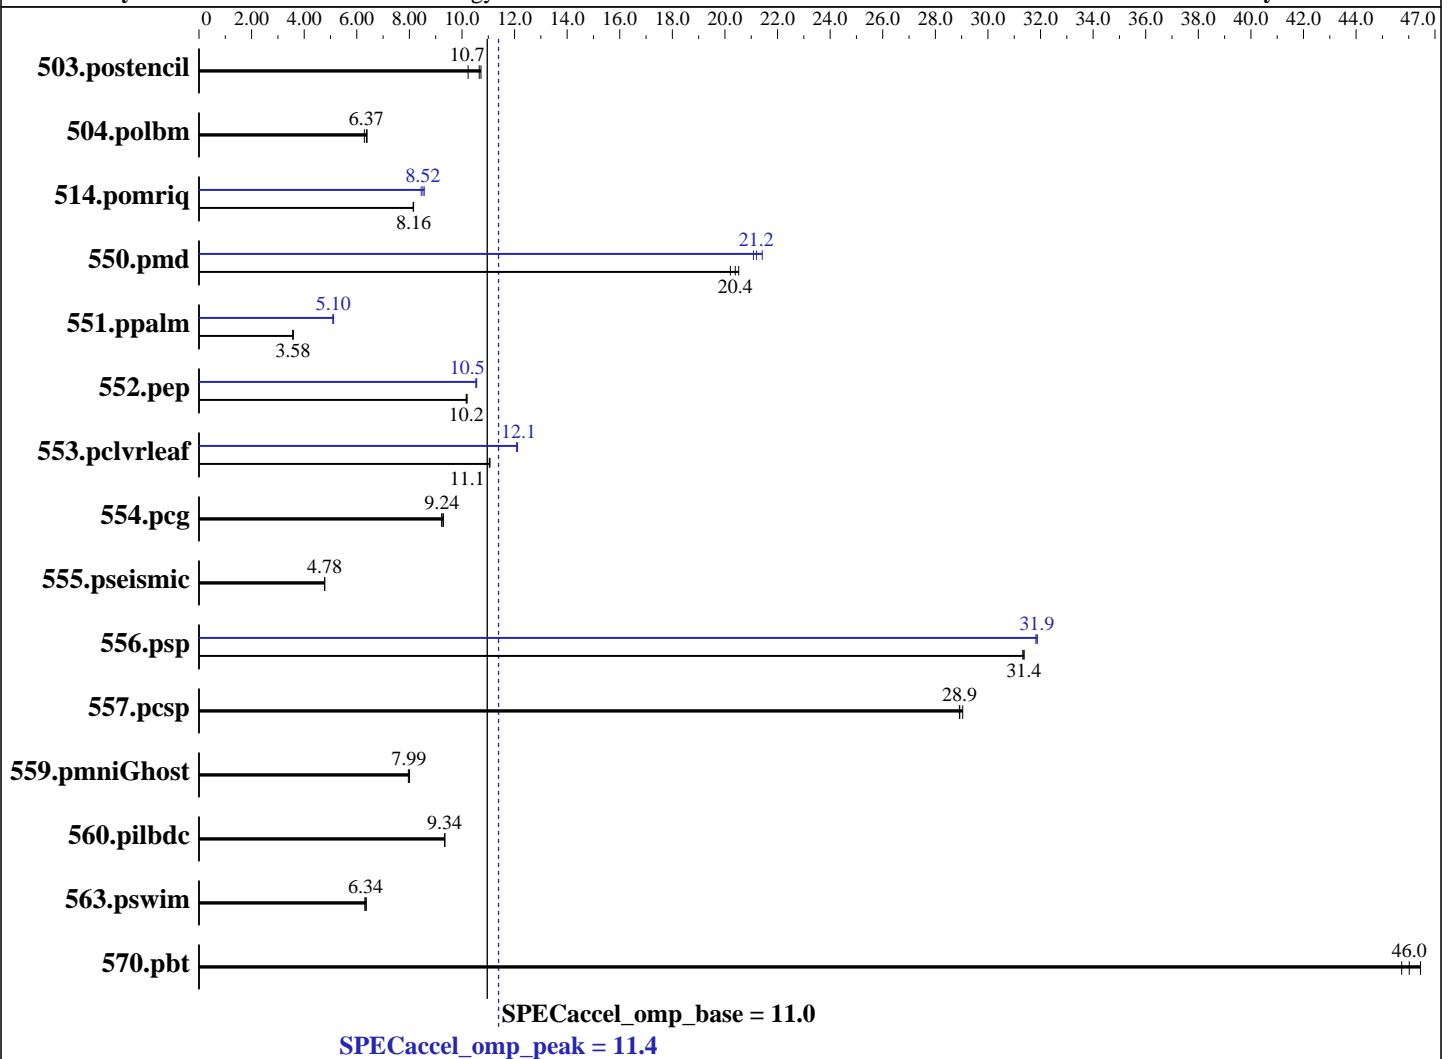

Hardware

CPU Name: Intel Xeon Platinum 8380H
 CPU Characteristics: Intel Turbo Boost Technology up to 4.3 GHz
 CPU MHz: 2900
 CPU MHz Maximum: 4300
 FPU: Integrated
 CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 39424 KB I+D on chip per chip
 Other Cache: None

Continued on next page

Accelerator

Accel Model Name: Intel Xeon Platinum 8380H
 Accel Vendor: Intel
 Accel Name: Intel Xeon Platinum 8380H
 Type of Accel: CPU
 Accel Connection: Not applicable
 Does Accel Use ECC: yes
 Accel Description: 4 x Intel Xeon Platinum 8380H
 Accel Driver: None



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

Hardware (Continued)

Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem: 1 x 1TB SATA 2.5" SSD
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 8.2,
kernel 4.18.0-193.el8.x86_64
Compiler: Intel Parallel Studio 20 Update 1 for Linux
Version 19.1.1.217 Build 20200306
File System: xfs
System State: Default
Other Software: FFTW 3.3.8

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.postencil	<u>10.2</u>	<u>10.7</u>	10.7	10.2	10.2	10.7	<u>10.2</u>	<u>10.7</u>	10.7	10.2	10.2	10.7
504.polbm	19.1	6.39	19.4	6.29	<u>19.2</u>	<u>6.37</u>	19.1	6.39	19.4	6.29	<u>19.2</u>	<u>6.37</u>
514.pomriq	76.3	8.14	76.1	8.16	<u>76.1</u>	<u>8.16</u>	73.5	8.45	72.5	8.57	<u>72.9</u>	<u>8.52</u>
550.pmd	11.7	20.5	<u>11.8</u>	<u>20.4</u>	11.9	20.2	11.4	21.1	11.3	21.4	<u>11.4</u>	<u>21.2</u>
551.ppalm	152	3.58	<u>152</u>	<u>3.58</u>	152	3.57	<u>107</u>	<u>5.10</u>	107	5.09	106	5.12
552.pep	<u>22.7</u>	<u>10.2</u>	22.7	10.2	22.7	10.2	21.9	10.6	<u>21.9</u>	<u>10.5</u>	21.9	10.5
553.pclvrleaf	<u>104</u>	<u>11.1</u>	104	11.0	104	11.1	94.8	12.1	94.5	12.1	<u>94.7</u>	<u>12.1</u>
554.pcg	35.8	9.30	<u>36.0</u>	<u>9.24</u>	36.1	9.23	35.8	9.30	<u>36.0</u>	<u>9.24</u>	36.1	9.23
555.pseismic	59.0	4.78	<u>59.0</u>	<u>4.78</u>	59.0	4.78	59.0	4.78	<u>59.0</u>	<u>4.78</u>	59.0	4.78
556.psp	<u>26.1</u>	<u>31.4</u>	26.1	31.3	26.1	31.4	25.7	31.8	25.7	31.9	<u>25.7</u>	<u>31.9</u>
557.pcsp	29.6	29.0	29.7	28.9	<u>29.7</u>	<u>28.9</u>	29.6	29.0	29.7	28.9	<u>29.7</u>	<u>28.9</u>
559.pmniGhost	<u>49.7</u>	<u>7.99</u>	49.9	7.96	49.6	8.01	<u>49.7</u>	<u>7.99</u>	49.9	7.96	49.6	8.01
560.pilbdc	70.0	9.34	69.8	9.35	<u>69.9</u>	<u>9.34</u>	70.0	9.34	69.8	9.35	<u>69.9</u>	<u>9.34</u>
563.pswim	25.0	6.36	25.2	6.31	<u>25.1</u>	<u>6.34</u>	25.0	6.36	25.2	6.31	<u>25.1</u>	<u>6.34</u>
570.pbt	<u>16.9</u>	<u>46.0</u>	17.1	45.7	16.8	46.4	<u>16.9</u>	<u>46.0</u>	17.1	45.7	16.8	46.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Platform Notes

Sysinfo program /home/ACCEL1.3/Docs/sysinfo
\$Rev: 6965 \$ \$Date:: 2015-04-21 #\$ c05a7f14b1b1765e3feldf68447e8a35
running on narvilrh82 Thu Aug 13 02:57:42 2020

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380H CPU @ 2.90GHz
4 "physical id"s (chips)
224 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings  : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
```

cache size : 39424 KB

From /proc/meminfo

MemTotal: 1584725580 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="8.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 8.2 (Ootpa)"
redhat-release: Red Hat Enterprise Linux Server release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux Server release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga:server
```

uname -a:

Linux narvilrh82 4.18.0-193.el8.x86_64 #1 SMP Tue Feb 18 16:39:12 EST 2020
x86_64 x86_64 x86_64 GNU/Linux

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Platform Notes (Continued)

run-level 3 Aug 12 04:25

SPEC is set to: /home/ACCEL1.3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home xfs		390G	130G	261G	34%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo M5E103H-1.00 06/24/2020

Memory:

48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200 MT/s

(End of data from sysinfo program)

General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

503.postencil: -DSPEC_USE_INNER_SIMD

504.polbm: -DSPEC_USE_INNER_SIMD

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Base Portability Flags (Continued)

514.pomriq: -DSPEC_USE_INNER_SIMD
550.pmd: -DSPEC_USE_INNER_SIMD -80
551.ppalm: -DSPEC_USE_INNER_SIMD
552.pep: -DSPEC_USE_INNER_SIMD
553.pclvrleaf: -DSPEC_USE_INNER_SIMD
554.pcg: -DSPEC_USE_INNER_SIMD
555.pseismic: -DSPEC_USE_INNER_SIMD
556.psp: -DSPEC_USE_INNER_SIMD
557.pcsp: -DSPEC_USE_INNER_SIMD
559.pmniGhost: -DSPEC_USE_INNER_SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER_SIMD
563.pswim: -DSPEC_USE_INNER_SIMD
570.pbt: -DSPEC_USE_INNER_SIMD

Base Optimization Flags

C benchmarks:
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
Fortran benchmarks:
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
Benchmarks using both Fortran and C:
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host

Peak Compiler Invocation

C benchmarks:
icc
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

503.postencil: -DSPEC_USE_INNER_SIMD
504.polbm: -DSPEC_USE_INNER_SIMD
514.pomriq: -DSPEC_USE_INNER_SIMD

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

Peak Portability Flags (Continued)

```

550.pmd: -DSPEC_USE_INNER_SIMD -80
551.ppalm: -DSPEC_USE_INNER_SIMD -DSPEC_HOST_FFTW3
552.pep: -DSPEC_USE_INNER_SIMD
553.pclvrleaf: -DSPEC_USE_INNER_SIMD
554.pcg: -DSPEC_USE_INNER_SIMD
555.pseismic: -DSPEC_USE_INNER_SIMD
556.psp: -DSPEC_USE_INNER_SIMD
557.pcsp: -DSPEC_USE_INNER_SIMD
559.pmniGhost: -DSPEC_USE_INNER_SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER_SIMD
563.pswim: -DSPEC_USE_INNER_SIMD
570.pbt: -DSPEC_USE_INNER_SIMD

```

Peak Optimization Flags

C benchmarks:

503.postencil: basepeak = yes

504.polbm: basepeak = yes

514.pomriq: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
-qopt-streaming-stores always -ipo

552.pep: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
-qopt-streaming-stores always

554.pcg: basepeak = yes

557.pcsp: basepeak = yes

570.pbt: basepeak = yes

Fortran benchmarks:

550.pmd: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
-fimf-precision=low

551.ppalm: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
-I/usr/local/include -L/usr/local/lib

555.pseismic: basepeak = yes

556.psp: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host -ipo

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8380H
ThinkSystem SR860 V2

SPECaccel_omp_peak = 11.4

SPECaccel_omp_base = 11.0

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Oct-2020
Hardware Availability: Oct-2020
Software Availability: Oct-2020

Peak Optimization Flags (Continued)

560.pilbdc: basepeak = yes

563.pswim: basepeak = yes

Benchmarks using both Fortran and C:

553.pclvrleaf: -O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
-qopt-streaming-stores always

559.pmniGhost: basepeak = yes

Peak Other Flags

Fortran benchmarks:

551.ppalm: -lfft3

The flags files that were used to format this result can be browsed at

<https://www.spec.org/accel/flags/Intel-compiler-linux64.html>

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190321.html

You can also download the XML flags sources by saving the following links:

<https://www.spec.org/accel/flags/Intel-compiler-linux64.xml>

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190321.xml

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.3.
Report generated on Tue Oct 13 17:09:57 2020 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 13 October 2020.