



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

accel2023 License: 13


Test Sponsor: Intel

Tested by: Intel

Test Date: Dec-2023

Hardware Availability: Jan-2023

Software Availability: Nov-2023

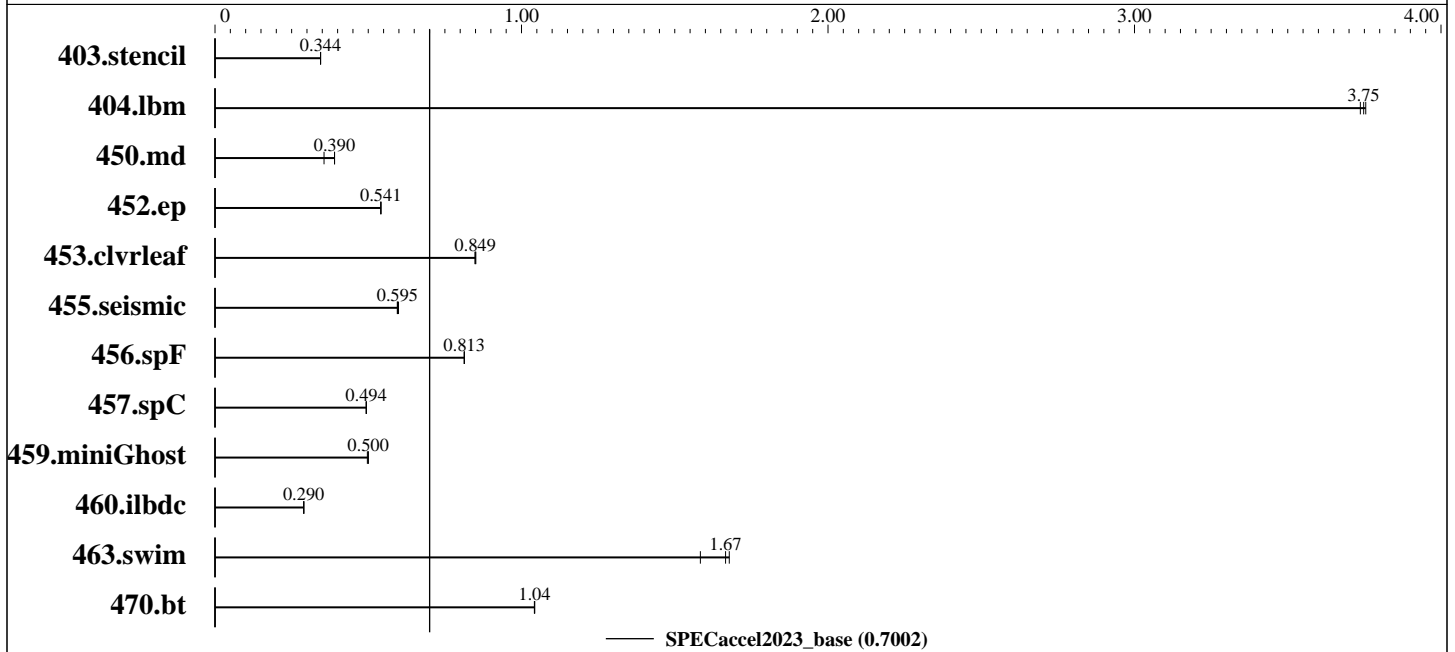

## Hardware

CPU Name: Intel Xeon Platinum 8480+  
 Max MHz.: 3800  
 Nominal: 2000  
 Enabled: 56 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B)  
 Storage: 269 TB  
 Other: None  
 Base Threads Run: 112  
 Min. Peak Threads: --  
 Max. Peak Threads: --

## Accelerator

Accel Model Name: Intel Xeon Platinum 8480+  
 Accel Vendor: Intel  
 Accel Name: Intel Xeon Platinum 8480+  
 Type of Accel: CPU  
 Accel Connection: N/A  
 Does Accel Use ECC: yes  
 Accel Description: Intel Xeon Platinum 8480+  
 SMT ON, Turbo OFF  
 Accel Driver: N/A

## Software

OS: Rocky Linux 8.8 (Green Obsidian)  
 SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.24.100-default  
 Compiler: Intel oneAPI Compiler 2024.0.2  
 Firmware: SE5C7411.86B.9525.D26.2305160804  
 File System: panfs  
 System State: Run level 5  
 Other: None  
 Base Parallel Model: SMD  
 Base Threads Run: 112

(Continued on next page)



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

accel2023 License: 13  
Test Sponsor: Intel  
Tested by: Intel

Test Date: Dec-2023  
Hardware Availability: Jan-2023  
Software Availability: Nov-2023

## Software (Continued)

Peak Parallel Models: Not Run  
Max. Peak Threads: --  
Min. Peak Threads: --

## Results Table

Benchmark	Base								Peak							
	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
403.stencil	SMD	1277	0.344	1278	0.344	<b>1277</b>	<b>0.344</b>									
404.lbm	SMD	121	3.75	122	3.74	<b>121</b>	<b>3.75</b>									
450.md	SMD	1687	0.356	<b>1539</b>	<b>0.390</b>	1538	0.390									
452.ep	SMD	767	0.541	767	0.541	<b>767</b>	<b>0.541</b>									
453.clvleaf	SMD	1179	0.848	1175	0.851	<b>1178</b>	<b>0.849</b>									
455.seismic	SMD	<b>1310</b>	<b>0.595</b>	1303	0.599	1311	0.595									
456.spF	SMD	584	0.813	<b>584</b>	<b>0.813</b>	584	0.814									
457.spC	SMD	1094	0.493	1094	0.494	<b>1094</b>	<b>0.494</b>									
459.miniGhost	SMD	1187	0.497	<b>1180</b>	<b>0.500</b>	1180	0.500									
460.ilbdc	SMD	1918	0.289	1915	0.290	<b>1916</b>	<b>0.290</b>									
463.swim	SMD	<b>264</b>	<b>1.67</b>	262	1.68	278	1.58									
470.bt	SMD	<b>1012</b>	<b>1.04</b>	1011	1.04	1012	1.04									

SPEC accel2023\_base = **0.7002**

SPEC accel2023\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Environment variables set by runaccel before the start of the run:

```
FORT_BUFFERED = "true"
KMP_AFFINITY = "compact,0,granularity=thread"
KMP_BLOCKTIME = "infinite"
KMP_HW_SUBSET = "1S,56C,2T"
KMP_LIBRARY = "turnaround"
KMP_STACKSIZE = "8M"
OMP_DYNAMIC = "FALSE"
OMP_WAIT_POLICY = "active"
```

The PANASAS filesystem as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC HPG Policy document, <http://www.spec.org/hpg/policy.html>



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

**accel2023 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Dec-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Platform Notes

Sysinfo program /global/panfs02/innl/abobyrr/SpecACCEL\_OMP/kits/accel2023/bin/sysinfo  
Rev: r6622 of 2021-04-07 bla7d5f8f71be5aff70a755cad7211a0  
running on eedq007 Sat Dec 30 12:18:21 2023

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8480+  
1 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 56  
siblings : 112  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55

From lscpu from util-linux 2.37.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 52 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 224  
On-line CPU(s) list: 0-55,112-167  
Off-line CPU(s) list: 56-111,168-223  
Vendor ID: GenuineIntel  
Model name: Intel(R) Xeon(R) Platinum 8480+  
CPU family: 6  
Model: 143  
Thread(s) per core: 2  
Core(s) per socket: 56  
Socket(s): 1  
Stepping: 6  
Frequency boost: disabled  
CPU max MHz: 2001.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4000.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault

(Continued on next page)



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

accel2023 License: 13  
Test Sponsor: Intel  
Tested by: Intel

Test Date: Dec-2023  
Hardware Availability: Jan-2023  
Software Availability: Nov-2023

## Platform Notes (Continued)

```

epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a
avx512f avx512dq rdseed adx avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_llc arch_capabilities
L1d cache:                2.6 MiB (56 instances)
L1i cache:                1.8 MiB (56 instances)
L2 cache:                 112 MiB (56 instances)
L3 cache:                 105 MiB (1 instance)
NUMA node(s):            2
NUMA node0 CPU(s):       0-55,112-167
NUMA node1 CPU(s):
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled
via prctl and seccomp
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS, IBPB
conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:     Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	105M	105M	15	Unified	3	114688	1	64

/proc/cpuinfo cache data  
cache size : 107520 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

(Continued on next page)



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

**accel2023 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Dec-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Platform Notes (Continued)

```
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 112
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134
135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164 165 166 167
```

node 0 size: 257691 MB

node 0 free: 244800 MB

node 1 cpus:

node 1 size: 257971 MB

node 1 free: 257178 MB

node distances:

```
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo

MemTotal: 528039224 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
userspace

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 15 SP4

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP4"

VERSION\_ID="15.4"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP4"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:

Linux eedq007 5.14.21-150400.24.100-default #1 SMP PREEMPT\_DYNAMIC Mon Dec 4 19:12:13  
UTC 2023 (3f5cd84) x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

gather_data_sampling:	Not affected
CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected

(Continued on next page)



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel

Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

accel2023 License: 13

Test Sponsor: Intel

Tested by: Intel

Test Date: Dec-2023

Hardware Availability: Jan-2023

Software Availability: Nov-2023

## Platform Notes (Continued)

```

mmio_stale_data:           Not affected
retbleed:                  Not affected
spec_rstack_overflow:     Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                             Bypass disabled via prctl and
                             seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs
                             barriers and __user pointer
                             sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced / Automatic
                             IBRS, IBPB: conditional, RSB
                             filling, PBRSE-eIBRS: SW sequence
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

```

run-level 5 Dec 30 12:10

```

SPEC is set to: /global/panfs02/innl/abobyrr/SpecACCEL_OMP/kits/accel2023
Filesystem      Type      Size  Used Avail Use% Mounted on
panfs://36.101.212.1/innl panfs 269T 245T 25T 92% /global/panfs02/innl

```

```

From /sys/devices/virtual/dmi/id
Vendor:          Intel Corporation
Product:         D50DNP1SBB
Product Family: Family

```

```

Cannot run dmidecode; consider saying (as root)
chmod +s /usr/sbin/dmidecode

```

```

BIOS:
  BIOS Vendor:      Intel Corporation
  BIOS Version:     SE5C7411.86B.9525.D26.2305160804
  BIOS Date:        05/16/2023

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C          | 403.stencil(base) 404.lbm(base) 452.ep(base) 457.spC(base)
          | 470.bt(base)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler

```

(Continued on next page)



# SPEC<sup>®</sup>Caccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPEC<sup>®</sup>Caccel2023\_base = 0.7002

SPEC<sup>®</sup>Caccel2023\_peak = Not Run

**accel2023 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Dec-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Compiler Version Notes (Continued)

Configuration file:

/home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg

=====  
Fortran | 450.md(base) 455.seismic(base) 456.spF(base) 460.ilbdc(base)  
| 463.swim(base)  
=====

ifx (IFX) 2024.0.2 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran, C | 453.clvrleaf(base) 459.miniGhost(base)  
=====

ifx (IFX) 2024.0.2 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler

Configuration file:

/home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

## Base Portability Flags

450.md: -80

457.spC: -w1,--no-relax(icx)(\*) -shared-intel -w1,--no-relax(icx)

459.miniGhost: -nofor-main

(\*) Indicates a portability flag that was found in a non-portability variable.



# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

**accel2023 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Dec-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

## Base Optimization Flags

C benchmarks:

403.stencil: -Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math  
-fiopenmp -qopt-dynamic-align -fvec-peel-loops  
-qopt-streaming-stores always -Xclang  
-fopenmp-declare-target-scalar-defaultmap-firstprivate  
-fimf-precision=low

404.lbm: Same as 403.stencil

452.ep: Same as 403.stencil

457.spC: -Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math  
-fiopenmp -qopt-dynamic-align -fvec-peel-loops  
-qopt-streaming-stores always -Xclang  
-fopenmp-declare-target-scalar-defaultmap-firstprivate  
-fimf-precision=low -mcmmodel=medium(\*)

470.bt: Same as 403.stencil

Fortran benchmarks:

-Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp  
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always  
-nostandard-realloc-lhs -align array32byte -auto  
-fimf-accuracy-bits-sqrt=14 -fimf-precision=low

Benchmarks using both Fortran and C:

-Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp  
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always  
-Xclang -fopenmp-declare-target-scalar-defaultmap-firstprivate  
-fimf-precision=low -nostandard-realloc-lhs -align array32byte -auto  
-fimf-accuracy-bits-sqrt=14

(\*) Indicates an optimization flag that was found in a portability variable.

The flags file that was used to format this result can be browsed at

[http://www.spec.org/accel2023/flags/Intel\\_compiler\\_flags.2024-02-14.html](http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-02-14.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/accel2023/flags/Intel\\_compiler\\_flags.2024-02-14.xml](http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-02-14.xml)





# SPECaccel<sup>®</sup>2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

**Intel**  
**Intel Xeon Platinum 8480+**  
 Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023\_base = 0.7002

SPECaccel2023\_peak = Not Run

**accel2023 License:** 13  
**Test Sponsor:** Intel  
**Tested by:** Intel

**Test Date:** Dec-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Nov-2023

SPECaccel is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPECaccel2023 v2.0.17 on 2023-12-30 14:18:21-0500.  
 Report generated on 2024-02-14 12:22:17 by accel2023 PDF formatter v112.  
 Originally published on 2024-02-14.