



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A


Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

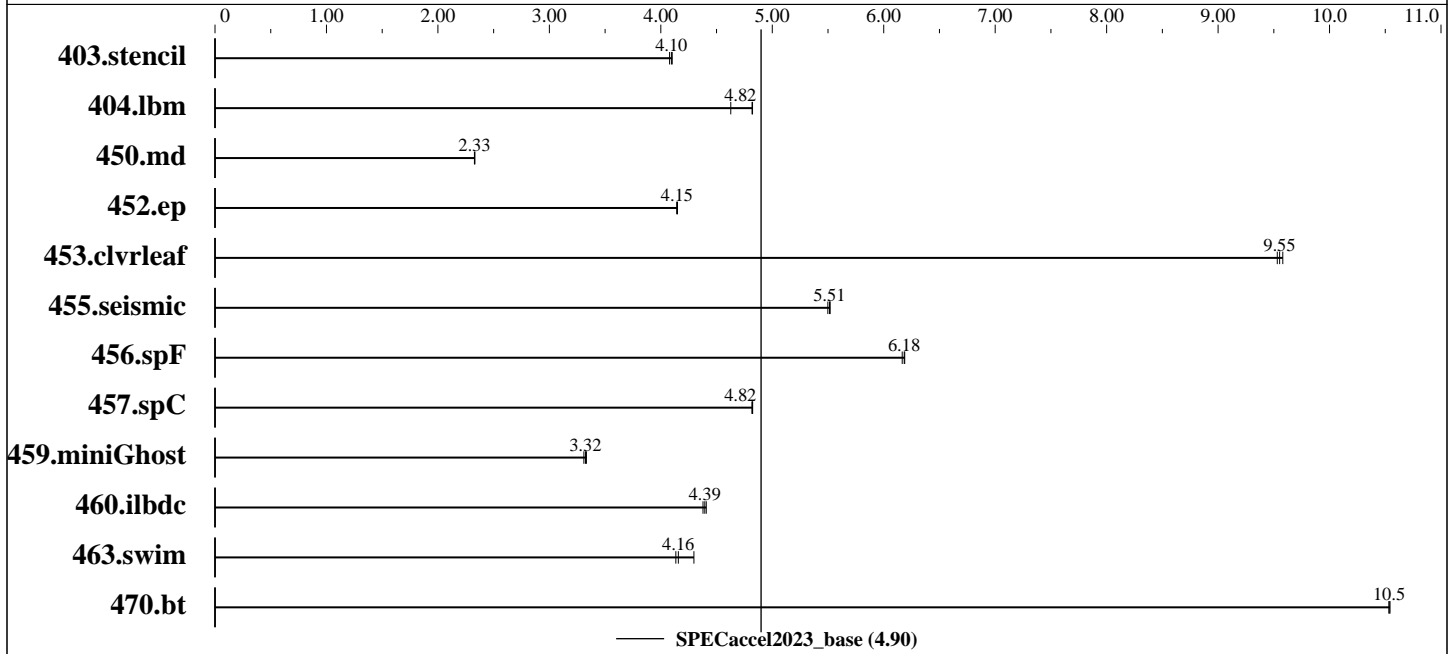

Hardware

CPU Name: INTEL XEON PLATINUM 8558
 Max MHz.: 4000
 Nominal: 2100
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 260 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB DDR5, 5600 MT/s, ECC)
 Storage: 1x 1.92TB NVMe SSD
 Other: None
 Base Threads Run: 1
 Min. Peak Threads: --
 Max. Peak Threads: --

Accelerator

Accel Model Name: H100 NVL 94GB
 Accel Vendor: NVIDIA Corporation
 Accel Name: NVIDIA H100 94GB
 Type of Accel: GPU
 Accel Connection: PCIe Gen5 x16
 Does Accel Use ECC: Yes
 Accel Description: NVIDIA H100 NVL 94GB
 Accel Driver: 580.105.08

Software

OS: Rocky Linux release 9.6 (Blue Onyx)
 5.14.0-570.58.1.el9_6.x86_64
 Compiler: C/Fortran: Version 25.9 NVHPC SDK
 Firmware: American Megatrends Inc. S610KTFPD.031 11/01/2024
 File System: xfs
 System State: Run level 5 (multi-user)
 Other: None
 Base Parallel Model: ACC
 Base Threads Run: 1
 Peak Parallel Models: Not Run

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Software (Continued)

Max. Peak Threads: --

Min. Peak Threads: --

Results Table

Benchmark	Base							Peak						
	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
403.stencil	ACC	107	4.10	107	4.10	108	4.08							
404.lbm	ACC	94.4	4.82	94.3	4.82	98.3	4.63							
450.md	ACC	258	2.33	258	2.33	257	2.33							
452.ep	ACC	100	4.15	100	4.15	100	4.14							
453.clvrfleaf	ACC	105	9.53	105	9.55	104	9.58							
455.seismic	ACC	141	5.51	142	5.50	141	5.52							
456.spF	ACC	76.8	6.18	76.8	6.19	77.0	6.17							
457.spC	ACC	112	4.82	112	4.82	112	4.82							
459.miniGhost	ACC	178	3.31	177	3.32	177	3.33							
460.ilbdc	ACC	126	4.39	127	4.38	126	4.41							
463.swim	ACC	106	4.13	106	4.16	102	4.30							
470.bt	ACC	100	10.5	100	10.5	100	10.5							

SPEC accel2023_base = 4.90

SPEC accel2023_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```

Sysinfo program /home/spec/accel2023/bin/sysinfo
Rev: r6622 of 2021-04-07 b1a7d5f8f71be5aff70a755cad7211a0
running on localhost.localdomain Wed Nov 12 11:32:21 2025

```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8558
 2 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 48
siblings : 96
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47

```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

**NVIDIA H100 94GB
CoreRidge KH590S3**

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       192
On-line CPU(s) list:         0-191
Vendor ID:                    GenuineIntel
Model name:                   INTEL(R) XEON(R) PLATINUM 8558
CPU family:                   6
Model:                        207
Thread(s) per core:          2
Core(s) per socket:          48
Socket(s):                    2
Stepping:                     2
CPU(s) scaling MHz:          21%
CPU max MHz:                  4000.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep
mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall
nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:               VT-x
L1d cache:                    4.5 MiB (96 instances)
L1i cache:                    3 MiB (96 instances)
L2 cache:                     192 MiB (96 instances)
L3 cache:                     520 MiB (2 instances)
NUMA node(s):                 4
NUMA node0 CPU(s):            0-23,96-119
NUMA node1 CPU(s):            24-47,120-143
NUMA node2 CPU(s):            48-71,144-167
NUMA node3 CPU(s):            72-95,168-191
Vulnerability Gather data sampling: Not affected

```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Indirect target selection: Not affected
 Vulnerability Itlb multihit: Not affected
 Vulnerability Lltf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Reg file data sampling: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRBS-eIBRS SW sequence; BHI BHI_DIS_S
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	260M	520M	20	Unified	3	212992	1	64

/proc/cpuinfo cache data
cache size : 266240 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
 node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99
 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
 node 0 size: 63597 MB
 node 0 free: 62338 MB
 node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
 142 143
 node 1 size: 64499 MB
 node 1 free: 61161 MB
 node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
 166 167
 node 2 size: 64499 MB
 node 2 free: 63718 MB
 node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

**NVIDIA H100 94GB
CoreRidge KH590S3**

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```

190 191
node 3 size: 64438 MB
node 3 free: 63756 MB
node distances:
node    0    1    2    3
  0:   10   12   21   21
  1:   12   10   21   21
  2:   21   21   10   12
  3:   21   21   12   10

```

```

From /proc/meminfo
MemTotal:      263204616 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: balanced

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Rocky Linux"
VERSION="9.6 (Blue Onyx)"
ID="rocky"
ID_LIKE="rhel centos fedora"
VERSION_ID="9.6"
PLATFORM_ID="platform:el9"
PRETTY_NAME="Rocky Linux 9.6 (Blue Onyx)"
ANSI_COLOR="0;32"
redhat-release: Rocky Linux release 9.6 (Blue Onyx)
rocky-release: Rocky Linux release 9.6 (Blue Onyx)
rocky-release-upstream: Derived from Red Hat Enterprise Linux 9.6
system-release: Rocky Linux release 9.6 (Blue Onyx)
system-release-cpe: cpe:/o:rocky:rocky:9::baseos

```

```

uname -a:
Linux localhost.localdomain 5.14.0-570.58.1.el9_6.x86_64 #1 SMP PREEMPT_DYNAMIC Fri
Oct 31 13:55:05 UTC 2025 x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

gather_data_sampling:          Not affected
indirect_target_selection:     Not affected
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected

```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```

Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
mmio_stale_data: Not affected
reg_file_data_sampling: Not affected
retbleed: Not affected
spec_rstack_overflow: Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced / Automatic
IBRS; IBPB: conditional; RSB
filling; PBRSE-eIBRS: SW sequence;
BHI: BHI_DIS_S
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

```

run-level 5 Nov 10 17:34

```

SPEC is set to: /home/spec/accel2023
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rl-home xfs   856G  8.2G  848G   1% /home

```

```

From /sys/devices/virtual/dmi/id
Vendor:          KTNF Co.,Ltd.
Product:         KH590S3
Product Family: Family

```

```

Cannot run dmidecode; consider saying (as root)
chmod +s /usr/sbin/dmidecode

```

```

BIOS:
  BIOS Vendor:    American Megatrends International, LLC.
  BIOS Version:   S610KTFPD.031
  BIOS Date:      11/01/2024

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 457.spC(base)
-----

```

```

/usr/bin/ld: /usr/lib64/crt1.o: in function `_start':
(.text+0x1b): undefined reference to `main'

```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

```
pgacclnk: child process exit status 1: /usr/bin/ld
nvc 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
```

```
=====  
C          | 403.stencil(base) 404.lbm(base) 452.ep(base) 470.bt(base)  
=====
```

```
nvc 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
```

```
=====  
C          | 457.spC(base)  
=====
```

```
/usr/bin/ld: /usr/lib64/crt1.o: in function `_start':  
(.text+0x1b): undefined reference to `main'  
pgacclnk: child process exit status 1: /usr/bin/ld
nvc 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
```

```
=====  
C          | 403.stencil(base) 404.lbm(base) 452.ep(base) 470.bt(base)  
=====
```

```
nvc 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
```

```
=====  
Fortran    | 450.md(base) 455.seismic(base) 456.spF(base) 460.ilbdc(base)  
          | 463.swim(base)  
=====
```

```
nvfortran 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
```

```
=====  
Fortran, C | 453.clvrleaf(base) 459.miniGhost(base)  
=====
```

```
nvfortran 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids
NVIDIA Compilers and Tools
```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.

nvc 25.9-0 64-bit target on x86-64 Linux -tp sapphirerapids

NVIDIA Compilers and Tools

Copyright (c) 2025, NVIDIA CORPORATION & AFFILIATES. All rights reserved.

Base Compiler Invocation

C benchmarks:

nvc

Fortran benchmarks:

nvfortran

Benchmarks using both Fortran and C:

nvfortran nvc

Base Portability Flags

457.spC: -mcmmodel=medium -Wl,--no-relax

Base Optimization Flags

C benchmarks:

-Ofast -gpu=cc90 -gpu=ptx -gpu=nordc -acc -Mfprelaxed

-Mstack_arrays

Fortran benchmarks:

450.md: -O3 -gpu=cc90 -gpu=ptx -gpu=nordc -acc -Mfprelaxed

-Mstack_arrays

455.seismic: -Ofast -gpu=cc90 -gpu=ptx -gpu=nordc -acc -Mfprelaxed

-Mstack_arrays

456.spF: Same as 455.seismic

460.ilbdc: Same as 455.seismic

463.swim: Same as 455.seismic

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2026 Standard Performance Evaluation Corporation

KTNF

(Test Sponsor: Telecommunications Technology Association)

NVIDIA H100 94GB

CoreRidge KH590S3

SPECaccel2023_base = 4.90

SPECaccel2023_peak = Not Run

accel2023 License: 068A

Test Sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test Date: Nov-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

453.cvrleaf: -Ofast -gpu=cc90 -gpu=ptx -gpu=nordc -acc -Mfprelaxed
-Mstack_arrays

459.miniGhost: -Mnomain -Ofast -gpu=cc90 -gpu=ptx -gpu=nordc -acc
-Mfprelaxed -Mstack_arrays

The flags files that were used to format this result can be browsed at

http://www.spec.org/accel2023/flags/nv2023_flags_v2.html

http://www.spec.org/accel2023/flags/nv2021_flags_v1.0.3.2025-12-01.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/accel2023/flags/nv2023_flags_v2.xml

http://www.spec.org/accel2023/flags/nv2021_flags_v1.0.3.2025-12-01.xml

SPECaccel is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPECaccel2023 v2.0.18 on 2025-11-11 21:32:20-0500.

Report generated on 2026-05-26 17:29:58 by accel2023 PDF formatter v112.

Originally published on 2025-11-26.