



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 101

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 93.4

CPU2006 license: 03


Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

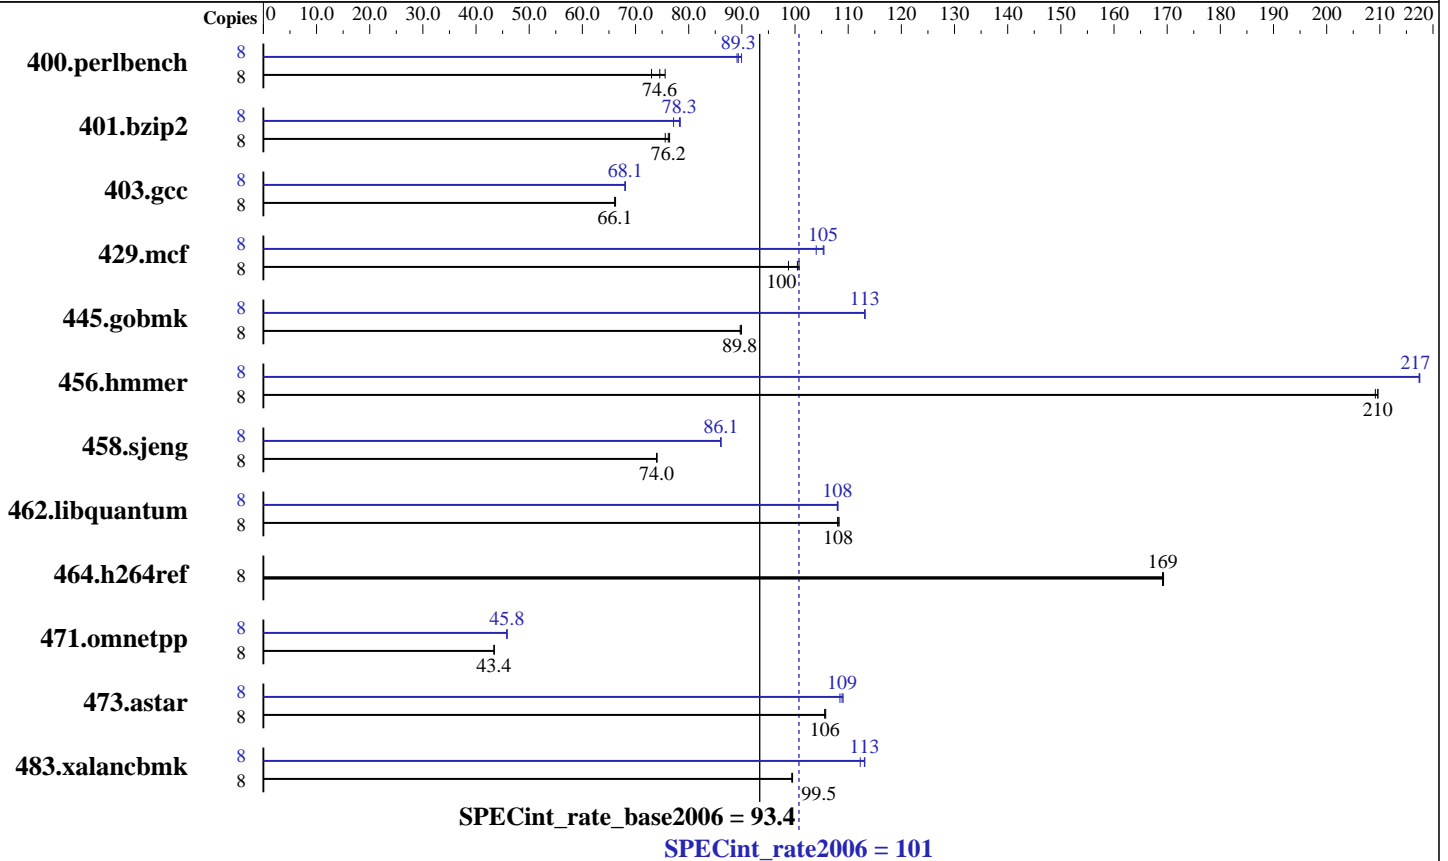

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1-8 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core
 L3 Cache: 9 MB I+D on chip per core
 Other Cache: None
 Memory: 32 GB (16x2GB DIMMs)
 Disk Subsystem: 36GB 15K RPM SCSI
 Other Hardware: None

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill Smartheap 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 101

HP Integrity rx7640 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECint_rate_base2006 = 93.4

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1070	73.0	1048	74.6	1034	75.6	8	877	89.1	875	89.3	869	89.9
401.bzip2	8	1021	75.6	1014	76.2	1010	76.4	8	1001	77.2	987	78.3	984	78.4
403.gcc	8	974	66.1	975	66.1	972	66.2	8	946	68.1	946	68.1	947	68.0
429.mcf	8	739	98.8	726	100	724	101	8	702	104	693	105	692	105
445.gobmk	8	936	89.7	933	89.9	934	89.8	8	742	113	742	113	742	113
456.hammer	8	356	210	357	209	356	210	8	343	217	343	218	343	217
458.sjeng	8	1307	74.0	1309	74.0	1308	74.0	8	1125	86.1	1125	86.1	1125	86.0
462.libquantum	8	1531	108	1535	108	1533	108	8	1533	108	1536	108	1535	108
464.h264ref	8	1047	169	1046	169	1046	169	8	1047	169	1046	169	1046	169
471.omnetpp	8	1152	43.4	1152	43.4	1152	43.4	8	1092	45.8	1091	45.8	1091	45.8
473.astar	8	532	106	531	106	532	106	8	518	108	515	109	516	109
483.xalancbmk	8	555	99.5	555	99.4	555	99.5	8	492	112	488	113	488	113

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 101

HP Integrity rx7640 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECint_rate_base2006 = 93.4

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Platform Notes

The system was configured as a single partition with 1 cell and 4 processors (8 cores) per cell.

The following config file entry was used to bind processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDM \$command

Base Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

C++ benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

Peak Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 101

HP Integrity rx7640 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECint_rate_base2006 = 93.4

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 101

SPECint_rate_base2006 = 93.4

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Sep-2006

Software Availability: Sep-2006

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:07:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.