



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 797

HP Integrity Superdome  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint\_rate\_base2006 = 744

CPU2006 license: 03


Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

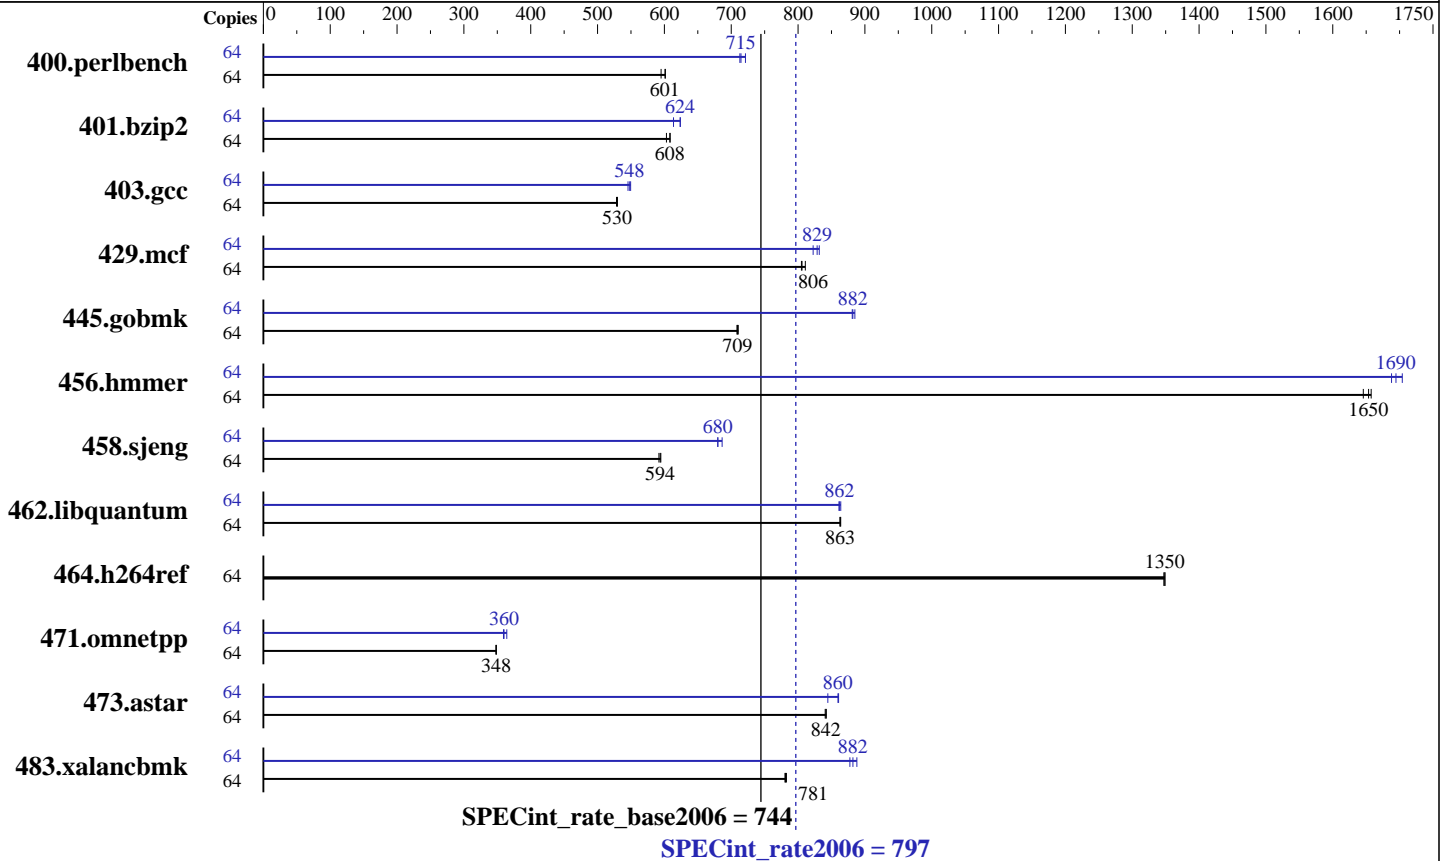

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9040  
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip  
 CPU(s) orderable: 1-64 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core  
 L3 Cache: 9 MB I+D on chip per core  
 Other Cache: None  
 Memory: 256 GB (256x1GB DIMMs)  
 Disk Subsystem: 3x73GB 15K RPM SCSI (striped)  
 Other Hardware: None

### Software

Operating System: HPUX11i-TCOE B.11.23.0609  
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill Smartheap 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 797

HP Integrity Superdome  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint\_rate\_base2006 = 744

CPU2006 license: 03

Test date: Oct-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b><u>1041</u></b>	<b><u>601</u></b>	1051	595	1040	601	64	867	721	877	713	<b><u>875</u></b>	<b><u>715</u></b>
401.bzip2	64	1024	603	<b><u>1016</u></b>	<b><u>608</u></b>	1015	609	64	<b><u>990</u></b>	<b><u>624</u></b>	1006	614	990	624
403.gcc	64	<b><u>973</u></b>	<b><u>530</u></b>	973	530	975	528	64	938	549	<b><u>940</u></b>	<b><u>548</u></b>	944	546
429.mcf	64	720	811	<b><u>724</u></b>	<b><u>806</u></b>	725	805	64	702	832	710	823	<b><u>704</u></b>	<b><u>829</u></b>
445.gobmk	64	<b><u>946</u></b>	<b><u>709</u></b>	945	711	947	709	64	762	881	759	885	<b><u>761</u></b>	<b><u>882</u></b>
456.hammer	64	360	1660	363	1650	<b><u>361</u></b>	<b><u>1650</u></b>	64	<b><u>352</u></b>	<b><u>1690</u></b>	354	1690	350	1700
458.sjeng	64	1302	595	1309	592	<b><u>1304</u></b>	<b><u>594</u></b>	64	1139	680	<b><u>1139</u></b>	<b><u>680</u></b>	1128	686
462.libquantum	64	<b><u>1536</u></b>	<b><u>863</u></b>	1537	863	1535	864	64	1535	864	1540	861	<b><u>1538</u></b>	<b><u>862</u></b>
464.h264ref	64	1051	1350	<b><u>1050</u></b>	<b><u>1350</u></b>	1050	1350	64	1051	1350	<b><u>1050</u></b>	<b><u>1350</u></b>	1050	1350
471.omnetpp	64	1149	348	1148	348	<b><u>1148</u></b>	<b><u>348</u></b>	64	1098	364	<b><u>1111</u></b>	<b><u>360</u></b>	1113	359
473.astar	64	533	842	534	841	<b><u>534</u></b>	<b><u>842</u></b>	64	522	861	532	845	<b><u>523</u></b>	<b><u>860</u></b>
483.xalancbmk	64	566	780	564	783	<b><u>565</u></b>	<b><u>781</u></b>	64	<b><u>501</u></b>	<b><u>882</u></b>	503	878	497	888

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 797**

HP Integrity Superdome  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECint\_rate\_base2006 = 744**

**CPU2006 license:** 03

**Test date:** Oct-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Platform Notes

The system was configured as a single partition with 8 cells and 4 processors (8 cores) per cell. Memory was configured as 50% local and 50% interleaved.

The following config file entry was used to bind processes to cells using the HP-UX "mpsched" utility:  
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDMO \$command

## Base Compiler Invocation

C benchmarks:  
/opt/ansic/bin/cc -Ae

C++ benchmarks:  
/opt/aCC/bin/aCC -Aa

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64  
403.gcc: -DSPEC\_CPU\_HPUX  
462.libquantum: -DSPEC\_CPU\_HPUX  
483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Base Optimization Flags

C benchmarks:  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N

C++ benchmarks:  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmartheap.a

## Peak Compiler Invocation

C benchmarks:  
/opt/ansic/bin/cc -Ae

C++ benchmarks:  
/opt/aCC/bin/aCC -Aa



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint\_rate2006 = 797**

HP Integrity Superdome  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECint\_rate\_base2006 = 744**

**CPU2006 license:** 03

**Test date:** Oct-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64  
403.gcc: -DSPEC\_CPU\_HPUX  
462.libquantum: -DSPEC\_CPU\_HPUX  
483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmr: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmr

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmarheap.a

473.astar: +Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmarheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)  
+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared  
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap  
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap\_8/lib/libsmarheap.a



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 797**

HP Integrity Superdome  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECint\_rate\_base2006 = 744**

**CPU2006 license:** 03

**Test date:** Oct-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.08.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.08.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:10:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 November 2006.