



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 (Intel Xeon processor
3040, 1.86GHz)

SPECfp®2006 = 11.4

SPECfp_base2006 = 11.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Feb-2007

Software Availability: Dec-2006

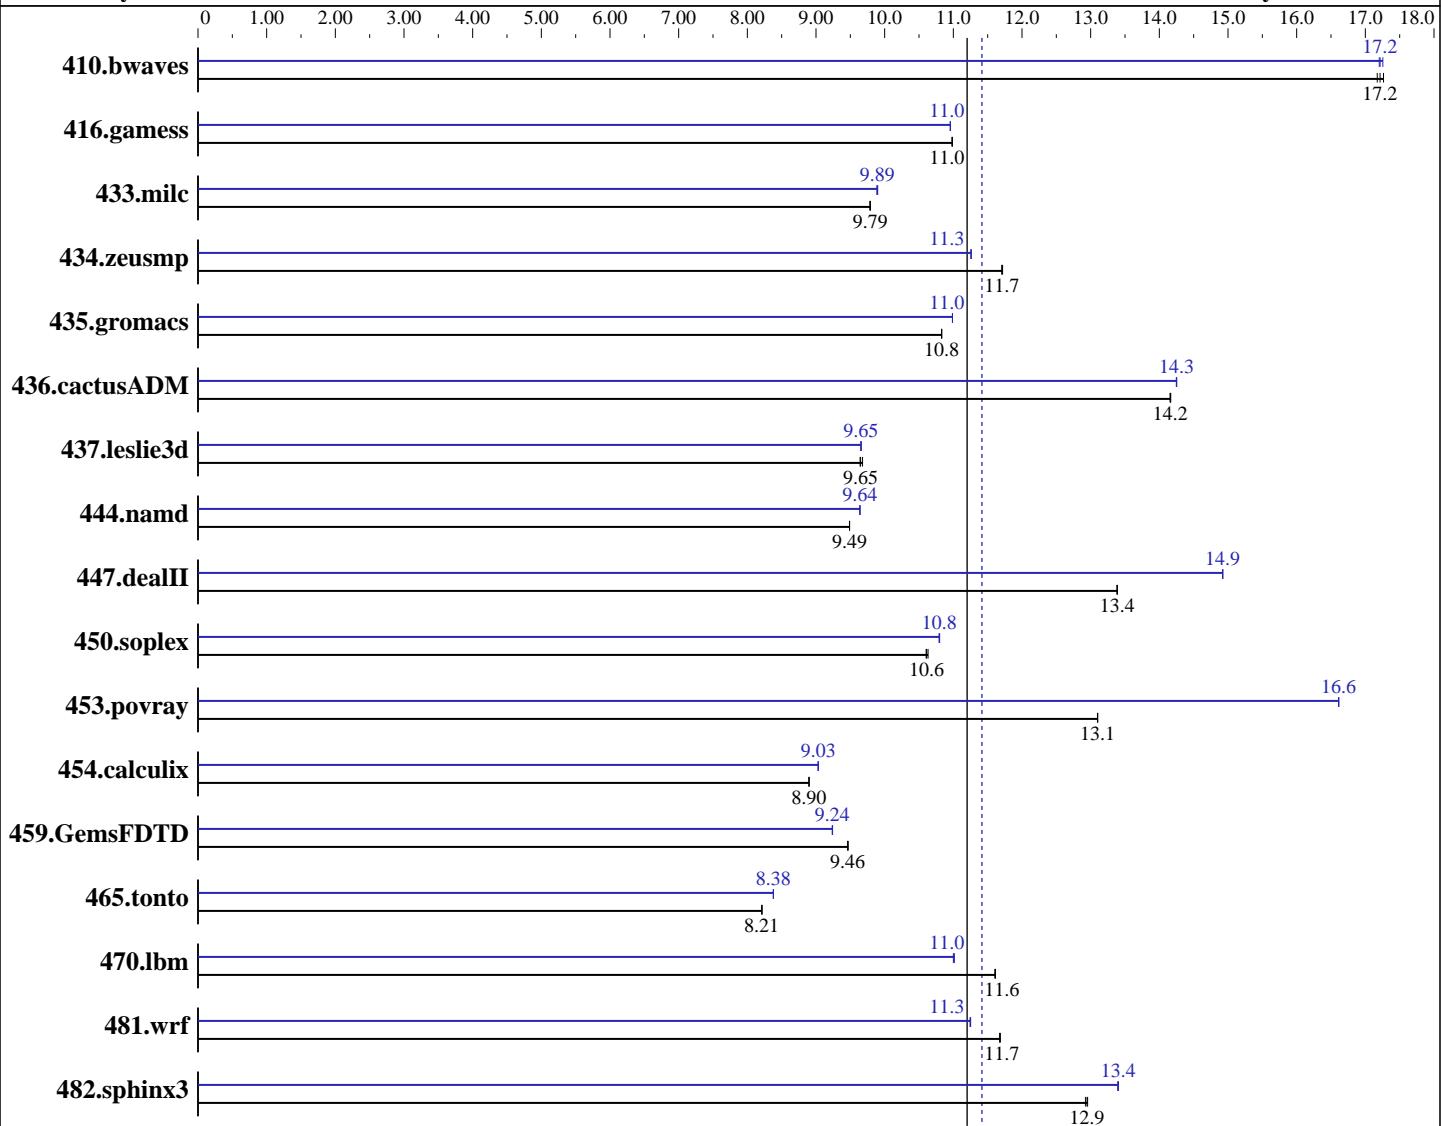

SPECfp_base2006 = 11.2

SPECfp2006 = 11.4

Hardware

CPU Name: Intel Xeon 3040
CPU Characteristics: 1.86 GHz, 4MB L2, 1066MHz bus
CPU MHz: 1860
FPU: Integrated
CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 2 MB I+D on chip per chip

Software

Operating System: Windows Server 2003 Enterprise Edition X64 Edition Service Pack1
Compiler: Intel C++ Compiler for IA32 version 9.1
Package ID W_CC_C_9.1.033 Build no 20061103Z
Intel Fortran Compiler for IA32 version 9.1
Package ID W_FC_C_9.1.033 Build no 20061103Z
Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel: No
File System: NTFS
System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 (Intel Xeon processor
3040, 1.86GHz)

SPECfp2006 = 11.4

SPECfp_base2006 = 11.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Feb-2007

Software Availability: Dec-2006

L3 Cache:	None	Base Pointers:	32-bit
Other Cache:	None	Peak Pointers:	32-bit
Memory:	8 GB (2GB DIMMx4, PC2-5300E ECC CL5)	Other Software:	MicroQuill SmartHeap Library 8.0 (shlw32M.lib)
Disk Subsystem:	73 GB SAS, 10000RPM		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	789	17.2	791	17.2	787	17.3	789	17.2	790	17.2	788	17.3
416.gamess	1783	11.0	1783	11.0	1783	11.0	1787	11.0	1787	11.0	1787	11.0
433.milc	938	9.79	938	9.79	938	9.79	927	9.90	929	9.89	928	9.89
434.zeusmp	777	11.7	777	11.7	777	11.7	808	11.3	808	11.3	808	11.3
435.gromacs	659	10.8	659	10.8	659	10.8	650	11.0	650	11.0	650	11.0
436.cactusADM	844	14.2	844	14.2	844	14.2	839	14.2	838	14.3	838	14.3
437.leslie3d	971	9.68	974	9.65	975	9.64	973	9.66	974	9.65	974	9.65
444.namd	845	9.49	845	9.49	845	9.49	832	9.64	832	9.64	832	9.64
447.dealII	855	13.4	855	13.4	855	13.4	767	14.9	767	14.9	767	14.9
450.soplex	784	10.6	786	10.6	787	10.6	772	10.8	773	10.8	773	10.8
453.povray	406	13.1	406	13.1	406	13.1	320	16.6	320	16.6	320	16.6
454.calculix	927	8.90	927	8.90	927	8.90	913	9.03	913	9.03	913	9.03
459.GemsFDTD	1121	9.47	1121	9.46	1121	9.46	1148	9.24	1148	9.24	1149	9.24
465.tonto	1198	8.21	1198	8.21	1198	8.21	1174	8.38	1174	8.38	1174	8.38
470.lbm	1183	11.6	1183	11.6	1184	11.6	1247	11.0	1248	11.0	1249	11.0
481.wrf	956	11.7	957	11.7	957	11.7	993	11.3	994	11.2	993	11.3
482.sphinx3	1504	13.0	1508	12.9	1505	12.9	1454	13.4	1455	13.4	1454	13.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 (Intel Xeon processor
3040,1.86GHz)

SPECfp2006 = 11.4

SPECfp_base2006 = 11.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Feb-2007

Software Availability: Dec-2006

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc7.1 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

```
-fast /F9500000000 shlw32m.lib -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-fast -Qcxx_features /F9500000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-fast /F9500000000 -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

```
-fast /F9500000000 -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 (Intel Xeon processor
3040,1.86GHz)

SPECfp2006 = 11.4

SPECfp_base2006 = 11.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Feb-2007

Software Availability: Dec-2006

Peak Compiler Invocation (Continued)

Fortran benchmarks:
fort

Benchmarks using both Fortran and C:
icl -Qvc7.1 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F9500000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F9500000000
-link /FORCE:MULTIPLE

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 (Intel Xeon processor
3040,1.86GHz)

SPECfp2006 = 11.4

SPECfp_base2006 = 11.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Feb-2007

Software Availability: Dec-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:04:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2007.