



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire E20K**

**SPECint_rate2006 = 608
SPECint_rate_base2006 = 556**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

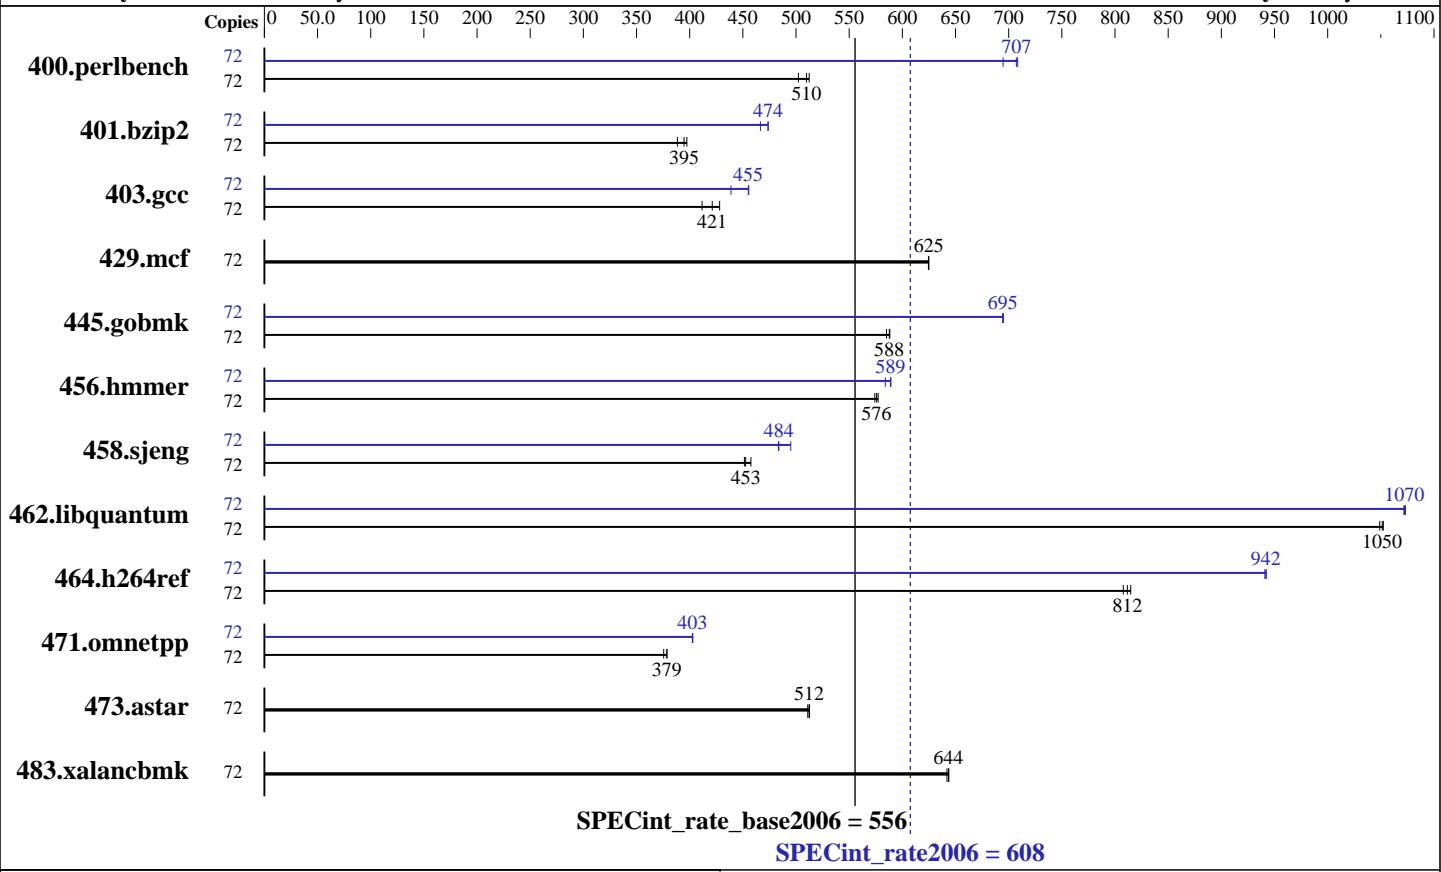

Hardware		Software	
CPU Name:	UltraSPARC IV+	Operating System:	Solaris 10 11/06
CPU Characteristics:		Compiler:	Sun Studio 12 (pre-release build 43)
CPU MHz:	1950	Auto Parallel:	No
FPU:	Integrated	File System:	ufs
CPU(s) enabled:	72 cores, 36 chips, 2 cores/chip	System State:	Default
CPU(s) orderable:	4-36 (order by number of chips, groups of 4)	Base Pointers:	32-bit
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32-bit
Secondary Cache:	2 MB I+D on chip per chip	Other Software:	None
L3 Cache:	32 MB I+D off chip per chip		
Other Cache:	None		
Memory:	160 GB, 8-way interleaved (128 x 1GB, 16 x 2GB)		
Disk Subsystem:	System: Sun StorageTek D240 Media Tray (2x73GB) SPEC: Sun StorageTek 6140 (5x146GB 10K FC-AL RAID5)		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire E20K**

**SPECint_rate2006 = 608
SPECint_rate_base2006 = 556**

CPU2006 license: 6

Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Sun Microsystems

Software Availability: May-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	1401	502	1380	510	1373	512	72	1012	695	993	708	995	707
401.bzip2	72	1789	388	1749	397	1760	395	72	1489	467	1467	474	1467	474
403.gcc	72	1354	428	1376	421	1408	412	72	1272	456	1321	439	1274	455
429.mcf	72	1051	625	1051	625	1051	625	72	1051	625	1051	625	1051	625
445.gobmk	72	1291	585	1284	588	1285	588	72	1087	695	1088	694	1087	695
456.hammer	72	1170	574	1164	577	1167	576	72	1140	589	1150	584	1141	589
458.sjeng	72	1930	451	1904	458	1925	453	72	1802	483	1760	495	1800	484
462.libquantum	72	1422	1050	1418	1050	1419	1050	72	1391	1070	1392	1070	1390	1070
464.h264ref	72	1972	808	1956	815	1963	812	72	1692	942	1693	941	1691	942
471.omnetpp	72	1189	379	1189	379	1198	376	72	1118	402	1117	403	1117	403
473.astar	72	989	511	987	512	986	513	72	989	511	987	512	986	513
483.xalancbmk	72	772	644	774	642	772	644	72	772	644	774	642	772	644

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to cores using "submit" and "pbind" except for peak runs of 403.gcc, 456.hammer, and 483.xalancbmk.

"ulimit -s unlimited"
Allows stack to grow until system limit.

/etc/system parameters

```
tune_t_fsflushr=3
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autooup=1200
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache
ts_dispatch_extended=0
    Selects default dispatch table, rather than large server table
```

Platform Notes

The tested system had 9 system boards. The first 8 system boards were equipped with 16GB of memory; the last

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire E20K**

**SPECint_rate2006 = 608
SPECint_rate_base2006 = 556**

CPU2006 license: 6

Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Sun Microsystems

Software Availability: May-2007

Platform Notes (Continued)

system board had 32GB. All memory was 8-way interleaved.

Base Compiler Invocation

C benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

C++ benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std

C++ benchmarks:

-library=stlport4 -xdepend -fast -xipo=2 -xpagesize=4M
-xprefetch_level=1 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:

-xjobs=24 -V

C++ benchmarks:

-xjobs=24 -verbose=version

Peak Compiler Invocation

C benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

C++ benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/CC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E20K

SPECint_rate2006 = 608
SPECint_rate_base2006 = 556

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
  403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
  -xalias_level=std -Xc -xipo=2 -xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
  -xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xipo=2 -xalias_level=std -xprefetch_level=2

429.mcf: basepeak = yes

445.gobmk: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xalias_level=std -xrestrict

456.hmmr: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xipo=2 -xalias_level=strong

458.sjeng: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xipo=2

462.libquantum: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xprefetch_level=2 -xipo=2

464.h264ref: -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xipo=2 -xalias_level=std -ll2amm
```

C++ benchmarks:

```
471.omnetpp: -library=stlport4 -xdepend
  -xprofile=collect:./feedback(pass 1)
  -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
  -xipo=2 -Qoption cg -Qlp-av=0 -lfast
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E20K

SPECint_rate2006 = 608
SPECint_rate_base2006 = 556

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

-xjobs=24 -V

C++ benchmarks:

-xjobs=24 -verbose=version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 11:56:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2007.