



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint®_rate2006 = 650

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 553

CPU2006 license: 19


Test date: Apr-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

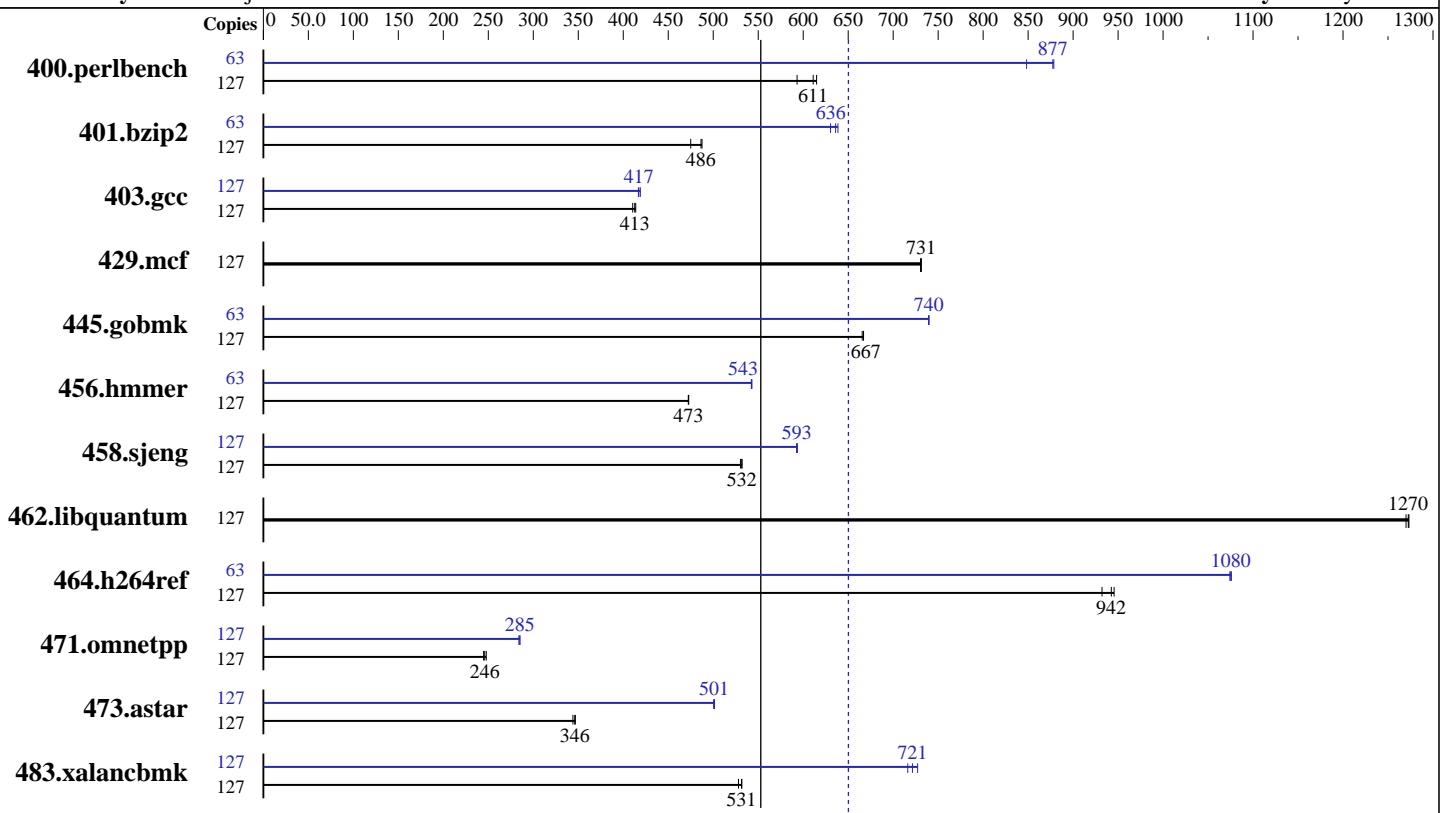

Hardware

| | |
|----------------------|---|
| CPU Name: | SPARC64 VI |
| CPU Characteristics: | |
| CPU MHz: | 2400 |
| FPU: | Integrated |
| CPU(s) enabled: | 64 cores, 32 chips, 2 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1 to 8 CMUs; each CMU contains 2 or 4 chips |
| Primary Cache: | 128 KB I + 128 KB D on chip per core |
| Secondary Cache: | 6 MB I+D on chip per chip |
| L3 Cache: | None |
| Other Cache: | None |
| Memory: | 256 GB (256 x 1 GB) |
| Disk Subsystem: | 1095 GB RAID 0 using 15 x 73 GB, 10,000 RPM Fujitsu ETERNUS4000 Model 80 |
| Other Hardware: | None |

Software

| | |
|-------------------|------------------------------|
| Operating System: | Solaris 10 11/06 |
| Compiler: | Sun Studio 12 (Early Access) |
| Auto Parallel: | No |
| File System: | ufs |
| System State: | Default |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32-bit |
| Other Software: | None |



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 650

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 553

CPU2006 license: 19

Test date: Apr-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------|------------|-------------|-------------|-------------|------------|--------|-------------|------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 127 | 2092 | 593 | 2018 | 615 | 2030 | 611 | 63 | 726 | 848 | 701 | 879 | 701 | 877 |
| 401.bzip2 | 127 | 2580 | 475 | 2520 | 486 | 2514 | 488 | 63 | 964 | 630 | 956 | 636 | 952 | 639 |
| 403.gcc | 127 | 2491 | 410 | 2477 | 413 | 2470 | 414 | 127 | 2450 | 417 | 2440 | 419 | 2453 | 417 |
| 429.mcf | 127 | 1586 | 730 | 1584 | 731 | 1584 | 731 | 127 | 1586 | 730 | 1584 | 731 | 1584 | 731 |
| 445.gobmk | 127 | 1997 | 667 | 2002 | 666 | 1997 | 667 | 63 | 893 | 740 | 894 | 740 | 894 | 739 |
| 456.hmmer | 127 | 2508 | 473 | 2506 | 473 | 2509 | 472 | 63 | 1084 | 542 | 1083 | 543 | 1083 | 543 |
| 458.sjeng | 127 | 2890 | 532 | 2888 | 532 | 2898 | 530 | 127 | 2593 | 593 | 2589 | 593 | 2591 | 593 |
| 462.libquantum | 127 | 2067 | 1270 | 2068 | 1270 | 2072 | 1270 | 127 | 2067 | 1270 | 2068 | 1270 | 2072 | 1270 |
| 464.h264ref | 127 | 2972 | 946 | 2982 | 942 | 3015 | 932 | 63 | 1296 | 1080 | 1298 | 1070 | 1297 | 1080 |
| 471.omnetpp | 127 | 3243 | 245 | 3204 | 248 | 3227 | 246 | 127 | 2784 | 285 | 2785 | 285 | 2795 | 284 |
| 473.astar | 127 | 2591 | 344 | 2571 | 347 | 2576 | 346 | 127 | 1778 | 501 | 1779 | 501 | 1781 | 500 |
| 483.xalancbmk | 127 | 1649 | 531 | 1659 | 528 | 1648 | 532 | 127 | 1224 | 716 | 1205 | 727 | 1215 | 721 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to cores using "submit" and "pbind".

Shell Environment:

```
Stack size set to unlimited via "ulimit -s unlimited"
MPSSHEAP=4MB
MPSSSTACK=4MB
MADV=access_lwp
LD_PRELOAD=mpss.so.1:madv.so.1
```

System Tunables:

```
(/etc/system parameters)
maxphys=4194304
    Defines the maximum size of I/O requests, in bytes.
maxpgio=1024
    Defines the maximum number of page I/O requests that can
    be queued by the paging system.
tune_t_fsflushr=30
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=300
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 650

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 553

CPU2006 license: 19

Test date: Apr-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Platform Notes

"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory was 8-way interleaved by filling all slots with the same capacity DIMMs.

This result was measured on a Fujitsu SPARC Enterprise M9000 Server. Note that the Fujitsu SPARC Enterprise M9000 and Sun SPARC Enterprise M9000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

/opt/SUNWspro12_EA070303/bin/cc

C++ benchmarks:

/opt/SUNWspro12_EA070303/bin/CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused -xprefetch_level=2

C++ benchmarks:

-library=stlport4 -fast -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Qoption cg -fma=fused -xprefetch_level=2

Peak Compiler Invocation

C benchmarks:

/opt/SUNWspro12_EA070303/bin/cc

C++ benchmarks:

/opt/SUNWspro12_EA070303/bin/CC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 650

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 553

CPU2006 license: 19

Test date: Apr-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused
-xprefetch_level=2 -xalias_level=std -xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused
-xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused
-xalias_level=std

429.mcf: basepeak = yes

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused

456.hmmr: Same as 403.gcc

458.sjeng: Same as 445.gobmk

462.libquantum: basepeak = yes

464.h264ref: Same as 403.gcc

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 650

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 553

CPU2006 license: 19

Test date: Apr-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Peak Optimization Flags (Continued)

```
473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xipo=2
           -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
           -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused
           -xalias_level=compatible -lfast
```

```
483.xalancbmk: -library=stlport4 -xprofile=collect:./feedback(pass 1)
                 -xprofile=use:./feedback(pass 2) -fast -xipo=2
                 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
                 -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -lfast
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:14:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 May 2007.