



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 73.4

IBM System x3650 (Intel Xeon E5310)

SPECint_rate_base2006 = 62.1

CPU2006 license: 11


Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Dec-2006

Tested by: IBM Corporation

Software Availability: Nov-2007

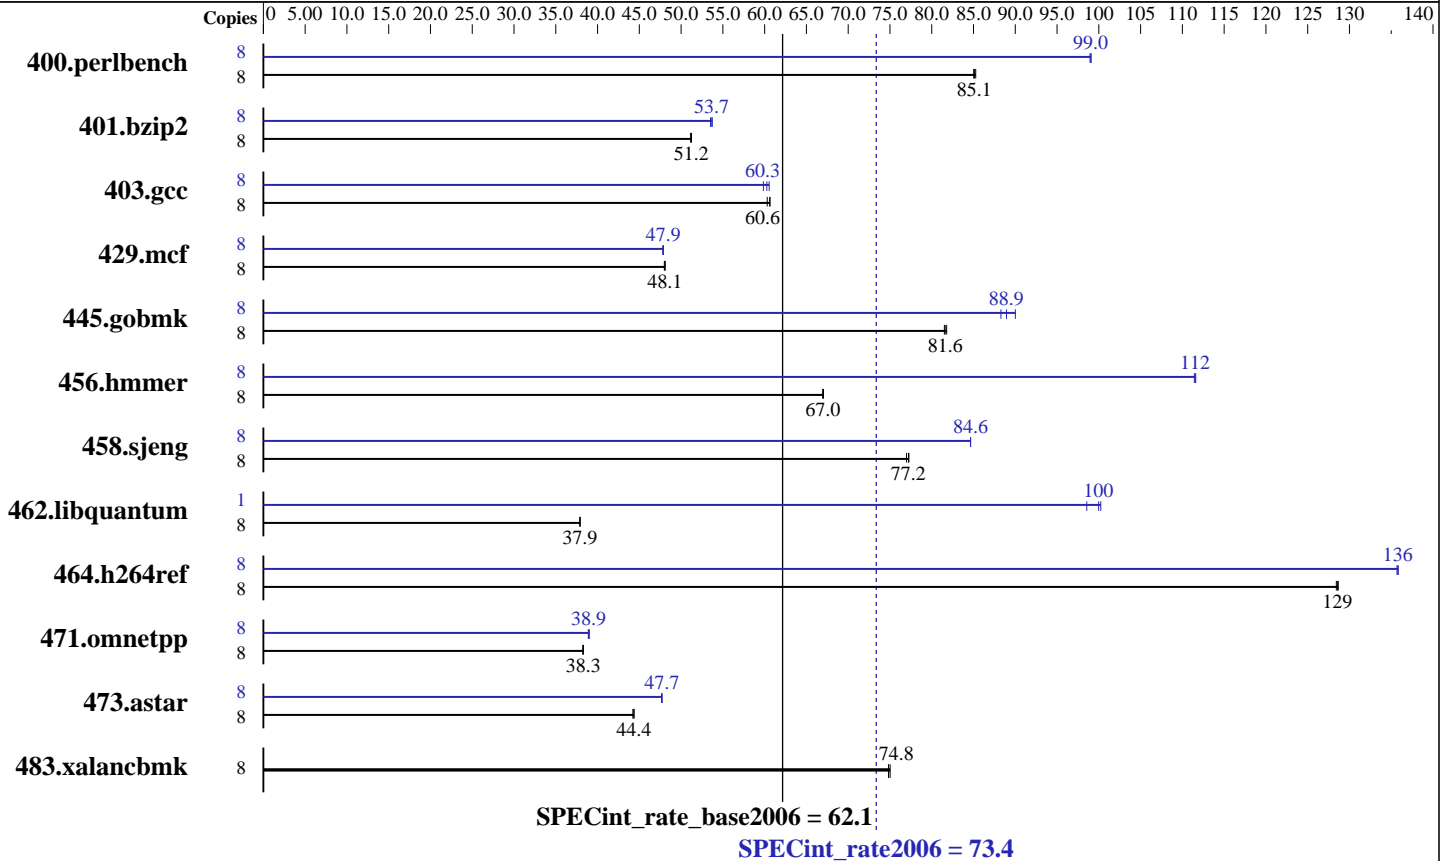

Hardware

CPU Name: Intel Xeon E5310
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for Linux version 10.1 Build 20070725
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 73.4

IBM System x3650 (Intel Xeon E5310)

SPECint_rate_base2006 = 62.1

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Dec-2006

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	919	85.0	<u>918</u>	<u>85.1</u>	917	85.3	8	<u>789</u>	<u>99.0</u>	789	99.1	790	99.0
401.bzip2	8	1510	51.1	<u>1508</u>	<u>51.2</u>	1507	51.2	8	1437	53.7	<u>1438</u>	<u>53.7</u>	1442	53.5
403.gcc	8	1062	60.6	1068	60.3	<u>1062</u>	<u>60.6</u>	8	1076	59.9	<u>1069</u>	<u>60.3</u>	1064	60.5
429.mcf	8	<u>1518</u>	<u>48.1</u>	1517	48.1	1520	48.0	8	<u>1524</u>	<u>47.9</u>	1526	47.8	1524	47.9
445.gobmk	8	<u>1028</u>	<u>81.6</u>	1030	81.5	1026	81.8	8	951	88.3	932	90.0	<u>943</u>	<u>88.9</u>
456.hammer	8	1115	66.9	1113	67.0	<u>1114</u>	<u>67.0</u>	8	670	111	669	112	<u>669</u>	<u>112</u>
458.sjeng	8	1253	77.3	<u>1254</u>	<u>77.2</u>	1257	77.0	8	1144	84.6	<u>1144</u>	<u>84.6</u>	1144	84.6
462.libquantum	8	<u>4374</u>	<u>37.9</u>	4373	37.9	4374	37.9	1	210	98.6	<u>207</u>	<u>100</u>	207	100
464.h264ref	8	<u>1377</u>	<u>129</u>	1376	129	1379	128	8	1305	136	<u>1304</u>	<u>136</u>	1303	136
471.omnetpp	8	1306	38.3	1308	38.2	<u>1306</u>	<u>38.3</u>	8	1282	39.0	1286	38.9	<u>1284</u>	<u>38.9</u>
473.astar	8	1266	44.4	<u>1266</u>	<u>44.4</u>	1270	44.2	8	<u>1177</u>	<u>47.7</u>	1177	47.7	1178	47.7
483.xalancbmk	8	738	74.8	736	75.0	<u>738</u>	<u>74.8</u>	8	738	74.8	736	75.0	<u>738</u>	<u>74.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 73.4

IBM System x3650 (Intel Xeon E5310)

SPECint_rate_base2006 = 62.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

```
456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

C++ benchmarks:

icpc

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 73.4

IBM System x3650 (Intel Xeon E5310)

SPECint_rate_base2006 = 62.1

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Dec-2006

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.02.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 73.4

IBM System x3650 (Intel Xeon E5310)

SPECint_rate_base2006 = 62.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:44:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.