



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire X4150

SPECint®_rate2006 = Not Run SPECint_rate_base2006 = 93.7

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jun-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

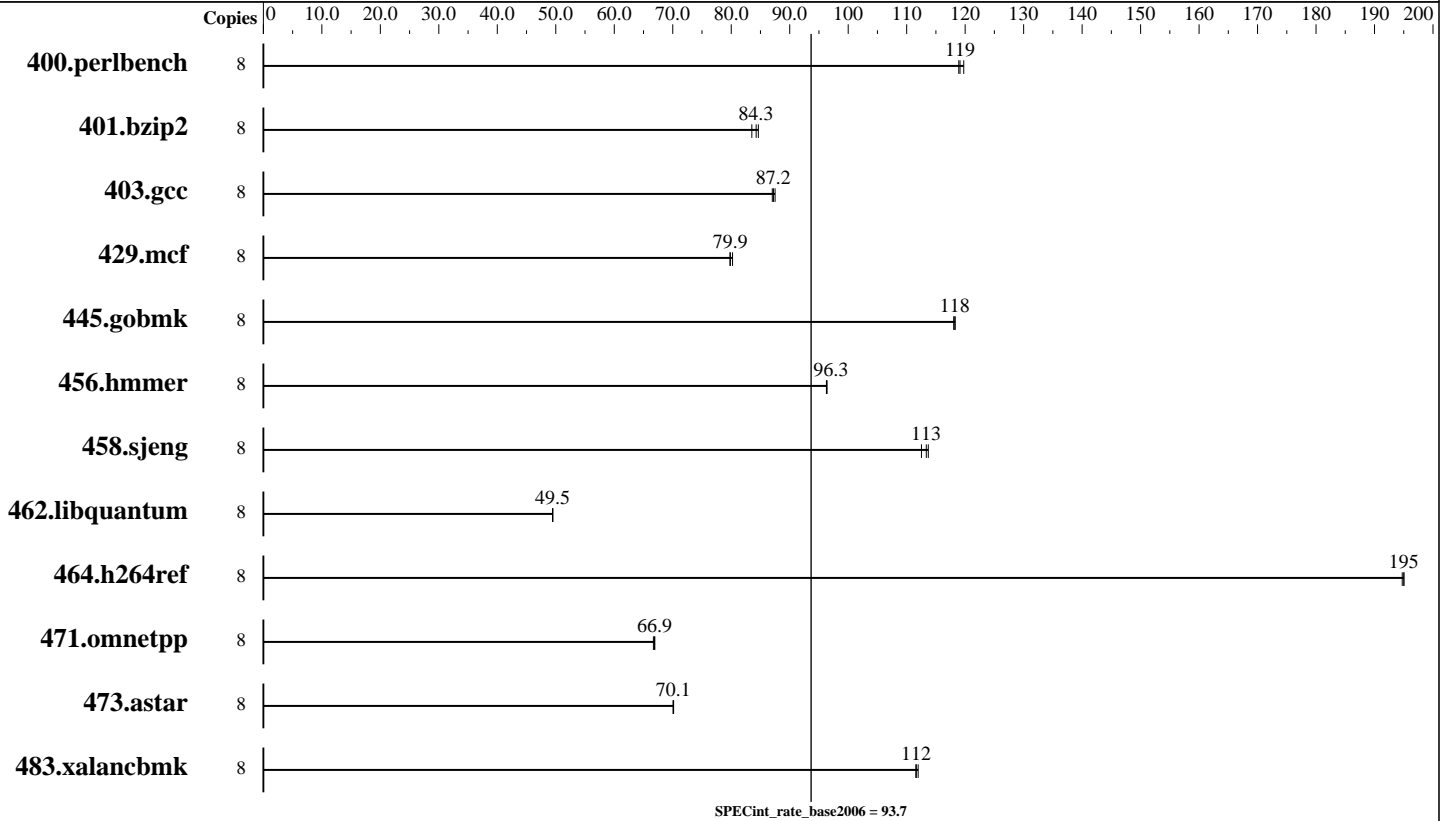

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 (order by number of chips)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2GB DDR2 PC2-5300F 2rank CAS 5-5-5 with ECC)
 Disk Subsystem: SAS, 72 GB, 10K RPM
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 10 SP1 for x86_64
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1
 Build 20070824
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: SmartHeap library V8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4150

SPECint_rate2006 = Not Run
SPECint_rate_base2006 = 93.7

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jun-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	653	120	657	119	<u>656</u>	<u>119</u>							
401.bzip2	8	912	84.6	924	83.5	<u>916</u>	<u>84.3</u>							
403.gcc	8	740	87.0	736	87.5	<u>738</u>	<u>87.2</u>							
429.mcf	8	909	80.2	915	79.8	<u>914</u>	<u>79.9</u>							
445.gobmk	8	711	118	<u>710</u>	<u>118</u>	709	118							
456.hammer	8	775	96.3	<u>775</u>	<u>96.3</u>	774	96.4							
458.sjeng	8	<u>854</u>	<u>113</u>	851	114	860	113							
462.libquantum	8	3351	49.5	3350	49.5	<u>3351</u>	<u>49.5</u>							
464.h264ref	8	<u>908</u>	<u>195</u>	908	195	909	195							
471.omnetpp	8	<u>748</u>	<u>66.9</u>	747	66.9	750	66.7							
473.astar	8	<u>801</u>	<u>70.1</u>	801	70.1	801	70.2							
483.xalancbmk	8	493	112	<u>494</u>	<u>112</u>	495	112							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited
OMP_NUM_THREADS set to 8
KMP_AFFINITY set to physical,0

Platform Notes

Default BIOS configurations were used.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4150

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 93.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jun-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 20:00:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2008.