



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECfp<sub>rate2006</sub> = 75.9

### PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

### SPECfp<sub>rate\_base2006</sub> = 68.8

CPU2006 license: 55


Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

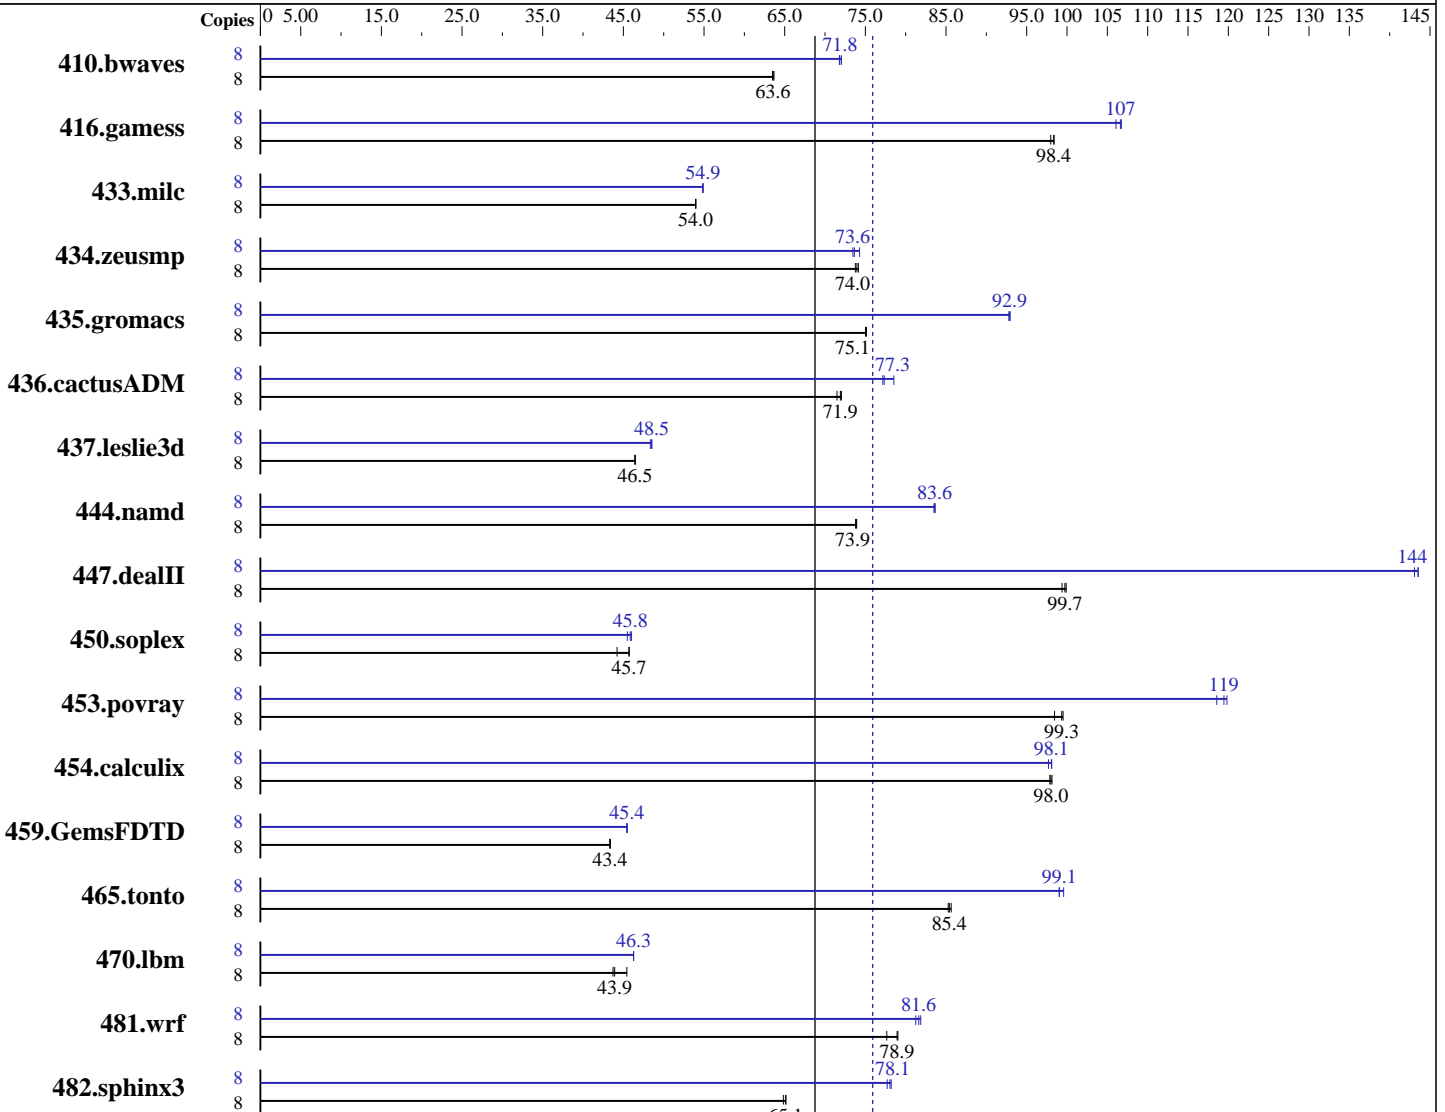

SPECfp<sub>rate\_base2006</sub> = 68.8

SPECfp<sub>rate2006</sub> = 75.9

#### Hardware

CPU Name: AMD Opteron 2350  
 CPU Characteristics: 2000  
 CPU MHz: Integrated  
 FPU: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) enabled: 1,2 chips  
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core  
 Primary Cache: 512 KB I+D on chip per core  
 Secondary Cache:

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (8 x 2GB, DDR2-667 CL5)  
Disk Subsystem: 1 x 73GB SAS, 10000 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1712	63.5	<u>1710</u>	<u>63.6</u>	1708	63.7	8	<u>1513</u>	<u>71.8</u>	1509	72.0	1515	71.8
416.gamess	8	1592	98.4	1599	98.0	<u>1593</u>	<u>98.4</u>	8	<u>1469</u>	<u>107</u>	1468	107	1477	106
433.milc	8	1360	54.0	1361	54.0	<u>1361</u>	<u>54.0</u>	8	1338	54.9	1339	54.8	<u>1338</u>	<u>54.9</u>
434.zeusmp	8	987	73.8	<u>984</u>	<u>74.0</u>	982	74.1	8	<u>989</u>	<u>73.6</u>	980	74.3	991	73.5
435.gromacs	8	761	75.0	760	75.1	<u>761</u>	<u>75.1</u>	8	<u>615</u>	<u>92.9</u>	616	92.8	615	92.9
436.cactusADM	8	1327	72.0	<u>1330</u>	<u>71.9</u>	1337	71.5	8	1217	78.5	1239	77.2	<u>1236</u>	<u>77.3</u>
437.leslie3d	8	1620	46.4	<u>1619</u>	<u>46.5</u>	1618	46.5	8	1550	48.5	<u>1550</u>	<u>48.5</u>	1555	48.3
444.namd	8	870	73.8	<u>869</u>	<u>73.9</u>	868	73.9	8	<u>767</u>	<u>83.6</u>	768	83.5	767	83.7
447.dealII	8	<u>918</u>	<u>99.7</u>	921	99.4	916	99.9	8	638	144	<u>638</u>	<u>144</u>	640	143
450.soplex	8	1509	44.2	1459	45.7	<u>1460</u>	<u>45.7</u>	8	1467	45.5	<u>1455</u>	<u>45.8</u>	1450	46.0
453.povray	8	432	98.5	428	99.5	<u>428</u>	<u>99.3</u>	8	359	119	<u>356</u>	<u>119</u>	355	120
454.calculix	8	673	98.1	<u>673</u>	<u>98.0</u>	674	97.9	8	673	98.1	<u>673</u>	<u>98.1</u>	676	97.7
459.GemsFDTD	8	1957	43.4	<u>1957</u>	<u>43.4</u>	1959	43.3	8	1868	45.4	<u>1868</u>	<u>45.4</u>	1867	45.5
465.tonto	8	923	85.3	<u>922</u>	<u>85.4</u>	919	85.6	8	790	99.6	<u>795</u>	<u>99.1</u>	795	99.0
470.lbm	8	<u>2503</u>	<u>43.9</u>	2514	43.7	2419	45.4	8	2376	46.3	2375	46.3	<u>2376</u>	<u>46.3</u>
481.wrf	8	1151	77.7	1131	79.0	<u>1132</u>	<u>78.9</u>	8	<u>1095</u>	<u>81.6</u>	1092	81.9	1100	81.3
482.sphinx3	8	2405	64.8	2393	65.2	<u>2394</u>	<u>65.1</u>	8	2006	77.7	1994	78.2	<u>1998</u>	<u>78.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
mount -t hugetlbfs nodev /mnt/hugepages
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Other Flags

C benchmarks:  
-w -Mipa=jobs:4

C++ benchmarks:  
-w -Mipa=jobs:4

Fortran benchmarks:  
-w -Mipa=jobs:4

Benchmarks using both Fortran and C:  
-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):  
pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):  
pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):  
pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnw -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnw  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 75.9

PowerEdge SC1435 (AMD Opteron 2350, 2.0 GHz)

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Sep 13 11:37:45 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2008.