



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT

FORMAT R1520ML

SPECint®2006 = 27.1

SPECint_base2006 = 24.0

CPU2006 license: 9015


Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

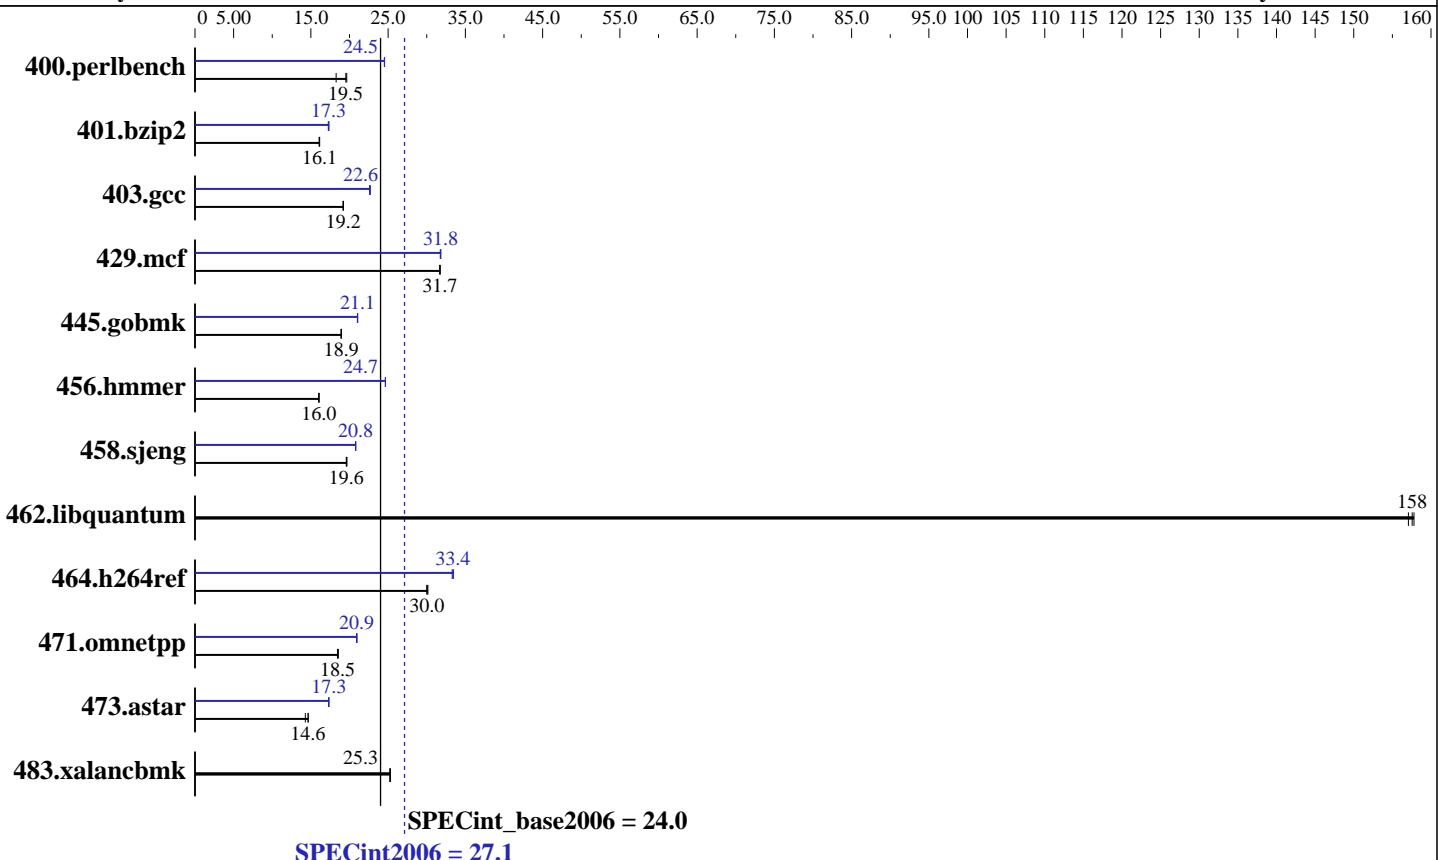

Hardware

CPU Name: Intel Xeon X3360
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4 x 2 GB ECC DDR2 SDRAM)
 Disk Subsystem: 160 GB SATA, 5400 RPM
 Other Hardware: None

Software

Operating System: Scientific Linux 5.2 2.6.18-92.1.13.el5
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT

FORMAT R1520ML

SPECint2006 = 27.1

SPECint_base2006 = 24.0

CPU2006 license: 9015

Test date: Oct-2008

Test sponsor: FORMAT

Hardware Availability: Aug-2008

Tested by: FORMAT

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	535	18.3	497	19.6	500	19.5	398	24.5	398	24.5	399	24.5
401.bzip2	601	16.1	598	16.1	598	16.1	559	17.3	558	17.3	556	17.3
403.gcc	420	19.2	420	19.2	419	19.2	356	22.6	355	22.7	356	22.6
429.mcf	287	31.7	288	31.7	288	31.7	287	31.8	287	31.7	287	31.8
445.gobmk	554	18.9	554	18.9	554	18.9	498	21.1	498	21.1	499	21.0
456.hmmer	582	16.0	582	16.0	581	16.1	378	24.7	379	24.6	378	24.7
458.sjeng	617	19.6	615	19.7	618	19.6	582	20.8	582	20.8	582	20.8
462.libquantum	132	157	132	158	131	158	132	157	132	158	131	158
464.h264ref	736	30.0	734	30.1	738	30.0	661	33.5	663	33.4	665	33.3
471.omnetpp	339	18.4	338	18.5	337	18.6	299	20.9	298	20.9	298	21.0
473.astar	491	14.3	480	14.6	479	14.7	405	17.3	406	17.3	405	17.3
483.xalancbmk	273	25.3	273	25.2	273	25.3	273	25.3	273	25.2	273	25.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT

SPECint2006 = 27.1

FORMAT R1520ML

SPECint_base2006 = 24.0

CPU2006 license: 9015

Test date: Oct-2008

Test sponsor: FORMAT

Hardware Availability: Aug-2008

Tested by: FORMAT

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

```
456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT

FORMAT R1520ML

SPECint2006 = 27.1

SPECint_base2006 = 24.0

CPU2006 license: 9015

Test sponsor: FORMAT

Tested by: FORMAT

Test date: Oct-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -auto-ilp32 -opt-prefetch
               -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
               -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -static -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=block
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
               -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
               -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

FORMAT

SPECint2006 = 27.1

FORMAT R1520ML

SPECint_base2006 = 24.0

CPU2006 license: 9015

Test date: Oct-2008

Test sponsor: FORMAT

Hardware Availability: Aug-2008

Tested by: FORMAT

Software Availability: Nov-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.01.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:43:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 October 2008.