



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp®2006 = 25.9**

## IBM System x3650 (Intel Xeon X5260)

**SPECfp\_base2006 = 24.8**

CPU2006 license: 11


Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

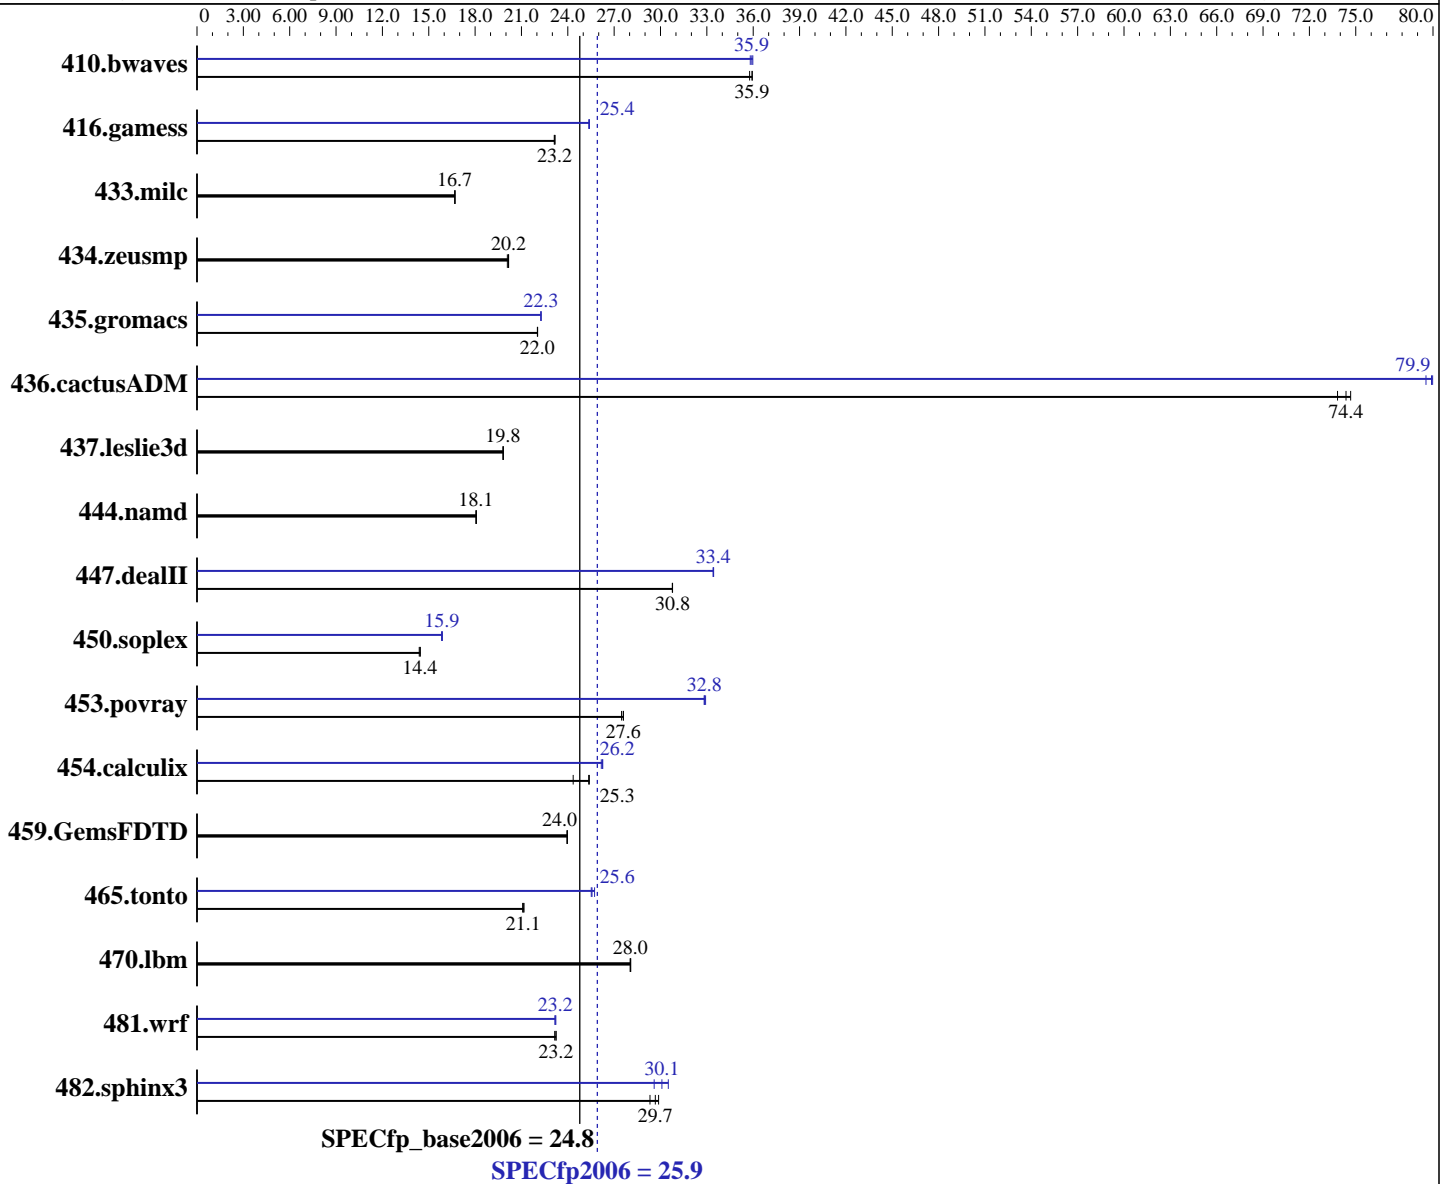

**Hardware**

CPU Name: Intel Xeon X5260  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

**Software**

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.9

IBM System x3650 (Intel Xeon X5260)

SPECfp\_base2006 = 24.8

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	380	35.8	<b>378</b>	<b>35.9</b>	378	35.9	<b>378</b>	<b>35.9</b>	379	35.8	378	36.0
416.gamess	845	23.2	847	23.1	<b>846</b>	<b>23.2</b>	<b>771</b>	<b>25.4</b>	771	25.4	772	25.4
433.milc	550	16.7	550	16.7	<b>550</b>	<b>16.7</b>	550	16.7	550	16.7	<b>550</b>	<b>16.7</b>
434.zeusmp	451	20.2	<b>451</b>	<b>20.2</b>	453	20.1	451	20.2	<b>451</b>	<b>20.2</b>	453	20.1
435.gromacs	324	22.0	324	22.0	<b>324</b>	<b>22.0</b>	321	22.3	321	22.3	<b>321</b>	<b>22.3</b>
436.cactusADM	<b>161</b>	<b>74.4</b>	160	74.7	162	73.8	<b>150</b>	<b>79.9</b>	150	79.5	149	80.0
437.leslie3d	474	19.8	474	19.8	<b>474</b>	<b>19.8</b>	474	19.8	474	19.8	<b>474</b>	<b>19.8</b>
444.namd	444	18.1	444	18.1	<b>444</b>	<b>18.1</b>	444	18.1	444	18.1	<b>444</b>	<b>18.1</b>
447.dealII	372	30.8	372	30.8	<b>372</b>	<b>30.8</b>	<b>342</b>	<b>33.4</b>	342	33.4	342	33.4
450.soplex	<b>578</b>	<b>14.4</b>	577	14.5	580	14.4	<b>526</b>	<b>15.9</b>	525	15.9	527	15.8
453.povray	<b>193</b>	<b>27.6</b>	194	27.5	193	27.6	162	32.8	<b>162</b>	<b>32.8</b>	162	32.9
454.calculix	339	24.3	325	25.4	<b>325</b>	<b>25.3</b>	315	26.2	314	26.3	<b>314</b>	<b>26.2</b>
459.GemsFDTD	<b>443</b>	<b>24.0</b>	443	24.0	443	24.0	<b>443</b>	<b>24.0</b>	443	24.0	443	24.0
465.tonto	465	21.2	<b>466</b>	<b>21.1</b>	467	21.1	382	25.7	<b>385</b>	<b>25.6</b>	386	25.5
470.lbm	490	28.0	<b>490</b>	<b>28.0</b>	489	28.1	490	28.0	<b>490</b>	<b>28.0</b>	489	28.1
481.wrf	481	23.2	482	23.2	<b>481</b>	<b>23.2</b>	481	23.2	482	23.2	<b>482</b>	<b>23.2</b>
482.sphinx3	652	29.9	<b>657</b>	<b>29.7</b>	665	29.3	639	30.5	<b>648</b>	<b>30.1</b>	659	29.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 200M  
Hardware Prefetch Enabled, Adjacent Sector Prefetch Enabled  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.9

IBM System x3650 (Intel Xeon X5260)

SPECfp\_base2006 = 24.8

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.9

IBM System x3650 (Intel Xeon X5260)

SPECfp\_base2006 = 24.8

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.9

IBM System x3650 (Intel Xeon X5260)

SPECfp\_base2006 = 24.8

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: basepeak = yes

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECfp2006 = 25.9

IBM System x3650 (Intel Xeon X5260) SPECfp\_base2006 = 24.8

<b>CPU2006 license:</b> 11	<b>Test date:</b> Oct-2008
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Nov-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.13.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.13.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:35:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 October 2008.