



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp®\_rate2006 = 82.8**

Acer Altos R520 (Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 76.1**

CPU2006 license: 97


Test date: Dec-2008

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2008

Tested by: Acer Incorporated

Software Availability: Nov-2008

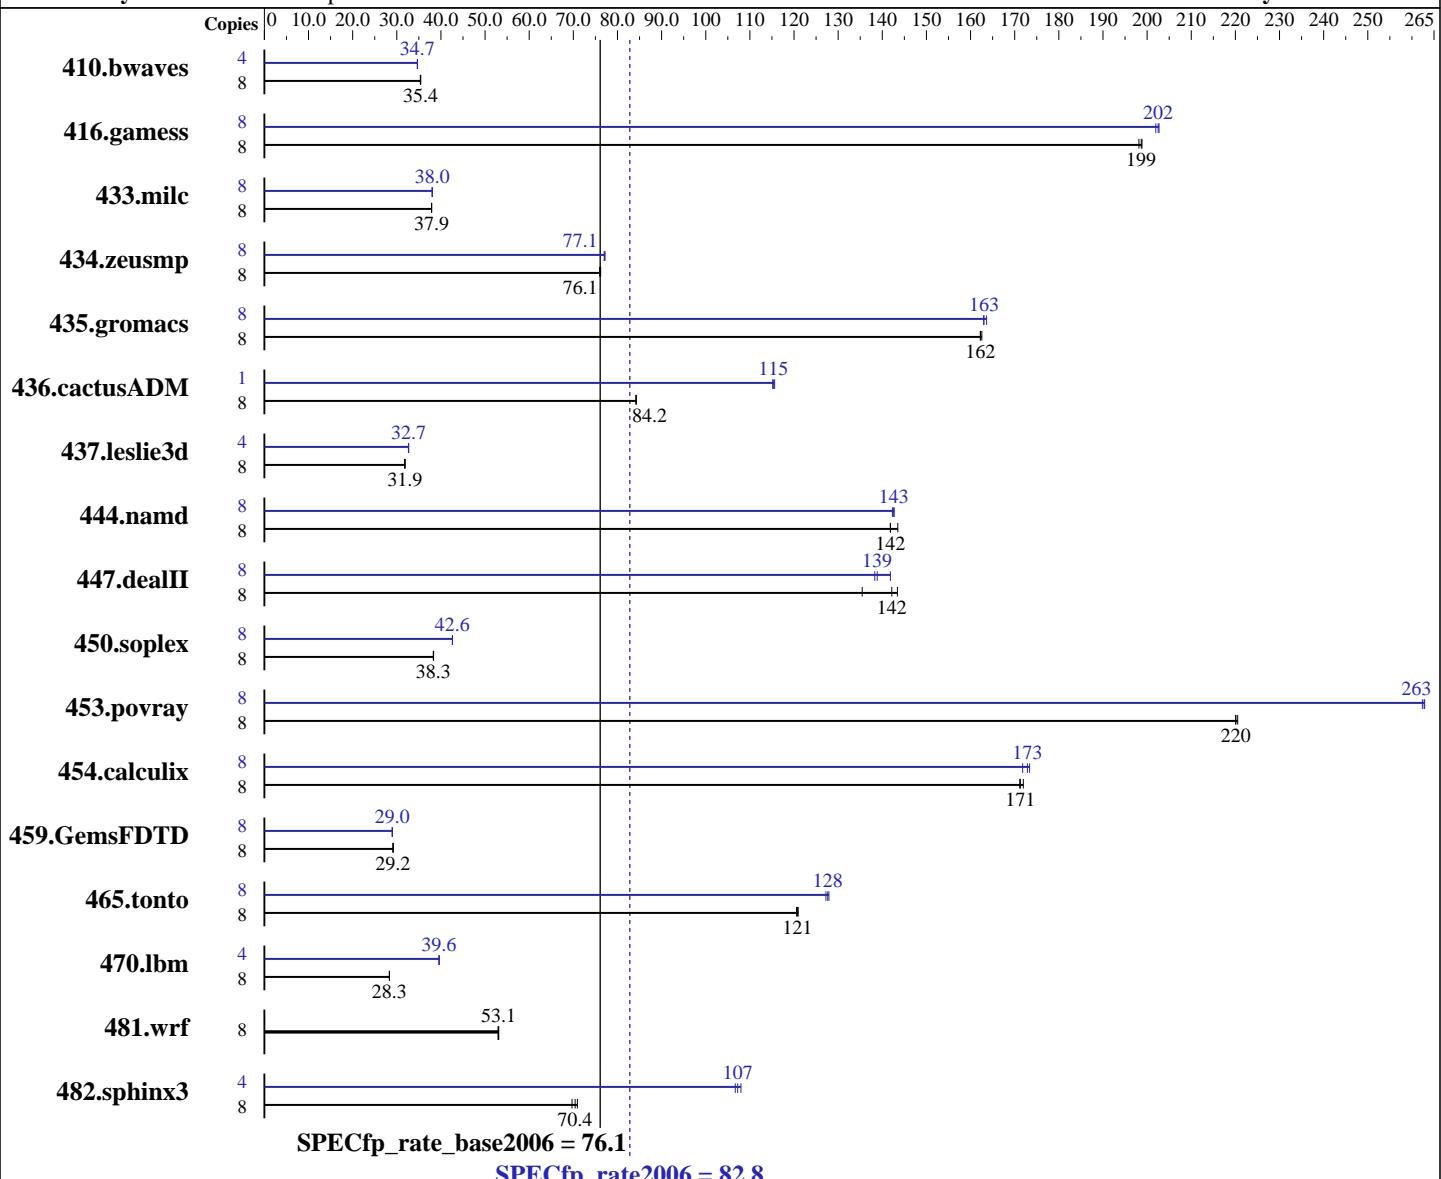

## Hardware

CPU Name: Intel Xeon X5470  
CPU Characteristics: 1333MHz system bus  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1, 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, level 3  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 82.8**

Acer Altos R520 (Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 76.1**

CPU2006 license: 97

Test date: Dec-2008

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2008

Tested by: Acer Incorporated

Software Availability: Nov-2008

L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)  
 Disk Subsystem: 1 x 73GB 10K RPM SAS HDD  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>3071</b>	<b>35.4</b>	3077	35.3	3070	35.4	4	<b>1568</b>	<b>34.7</b>	1567	34.7	1568	34.7
416.gamess	8	<b>788</b>	<b>199</b>	791	198	788	199	8	<b>773</b>	<b>203</b>	776	202	<b>774</b>	<b>202</b>
433.milc	8	<b>1938</b>	<b>37.9</b>	1938	37.9	1939	37.9	8	<b>1931</b>	<b>38.0</b>	1931	38.0	<b>1931</b>	<b>38.0</b>
434.zeusmp	8	955	76.2	959	75.9	<b>957</b>	<b>76.1</b>	8	946	77.0	<b>944</b>	<b>77.1</b>	944	77.2
435.gromacs	8	<b>352</b>	<b>162</b>	351	163	352	162	8	349	164	351	163	<b>350</b>	<b>163</b>
436.cactusADM	8	<b>1135</b>	<b>84.2</b>	1135	84.2	1135	84.2	1	104	<b>115</b>	103	116	<b>104</b>	<b>115</b>
437.leslie3d	8	2359	31.9	<b>2360</b>	<b>31.9</b>	2367	31.8	4	1150	32.7	1152	32.6	<b>1151</b>	<b>32.7</b>
444.namd	8	<b>452</b>	<b>142</b>	447	144	452	142	8	450	143	<b>450</b>	<b>143</b>	451	142
447.dealII	8	<b>644</b>	<b>142</b>	676	135	638	143	8	645	142	<b>659</b>	<b>139</b>	662	138
450.soplex	8	1743	38.3	1740	38.3	<b>1742</b>	<b>38.3</b>	8	1565	42.6	1566	42.6	<b>1566</b>	<b>42.6</b>
453.povray	8	<b>193</b>	<b>220</b>	193	220	193	221	8	<b>162</b>	<b>263</b>	162	263	162	262
454.calculix	8	<b>385</b>	<b>171</b>	386	171	384	172	8	381	173	<b>382</b>	<b>173</b>	384	172
459.GemsFDTD	8	2910	29.2	2913	29.1	<b>2910</b>	<b>29.2</b>	8	2929	29.0	<b>2929</b>	<b>29.0</b>	2928	29.0
465.tonto	8	653	121	<b>652</b>	<b>121</b>	651	121	8	619	127	<b>617</b>	<b>128</b>	615	128
470.lbm	8	3883	28.3	3879	28.3	<b>3879</b>	<b>28.3</b>	4	1388	39.6	<b>1388</b>	<b>39.6</b>	1388	39.6
481.wrf	8	1684	53.1	<b>1684</b>	<b>53.1</b>	1688	52.9	8	1684	53.1	<b>1684</b>	<b>53.1</b>	1688	52.9
482.sphinx3	8	2237	69.7	<b>2214</b>	<b>70.4</b>	2199	70.9	4	722	108	<b>727</b>	<b>107</b>	731	107

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Platform Notes

### BIOS Settings

Adjacent Cache Line Prefetch set to OFF  
 Hardware Prefetch set to OFF  
 Optimization for high-frequency FSB applications set to ON



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	<b>SPECfp_rate2006 = 82.8</b>
Acer Altos R520 (Intel Xeon X5470)	<b>SPECfp_rate_base2006 = 76.1</b>

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

## General Notes

taskset was used to bind processes to cores except  
for 436.cactusADM peak  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M  
'ulimit -s unlimited' was set for stacksize unlimited  
This result was measured on the Acer Altos R520.  
The Altos R720 and Altos R520 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 82.8**

Acer Altos R520 (Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 76.1**

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

**Test date:** Dec-2008

**Hardware Availability:** Sep-2008

**Software Availability:** Nov-2008

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Fortran benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp\_rate2006 = 82.8**

Acer Altos R520 (Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 76.1**

CPU2006 license: 97

Test date: Dec-2008

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2008

Tested by: Acer Incorporated

Software Availability: Nov-2008

## Peak Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
            -no-prec-div -static -fno-alias  
  
470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
          -auto-ilp32  
  
482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
            -no-prec-div -static -fno-alias -auto-ilp32  
  
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
             -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
  
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
             -no-prec-div -static -opt-malloc-options=3  
  
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
              -no-prec-div -static -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
  
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
             -no-prec-div -static -unroll2 -Ob0 -ansi-alias  
             -scalar-rep-  
  
434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
              -no-prec-div -static
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 82.8

Acer Altos R520 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 76.1

CPU2006 license: 97

Test date: Dec-2008

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2008

Tested by: Acer Incorporated

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.01.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.01.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:54:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 January 2009.