



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 28.2

IBM System x3250 M2 (Intel Xeon X3370)

SPECint_base2006 = 25.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Nov-2008

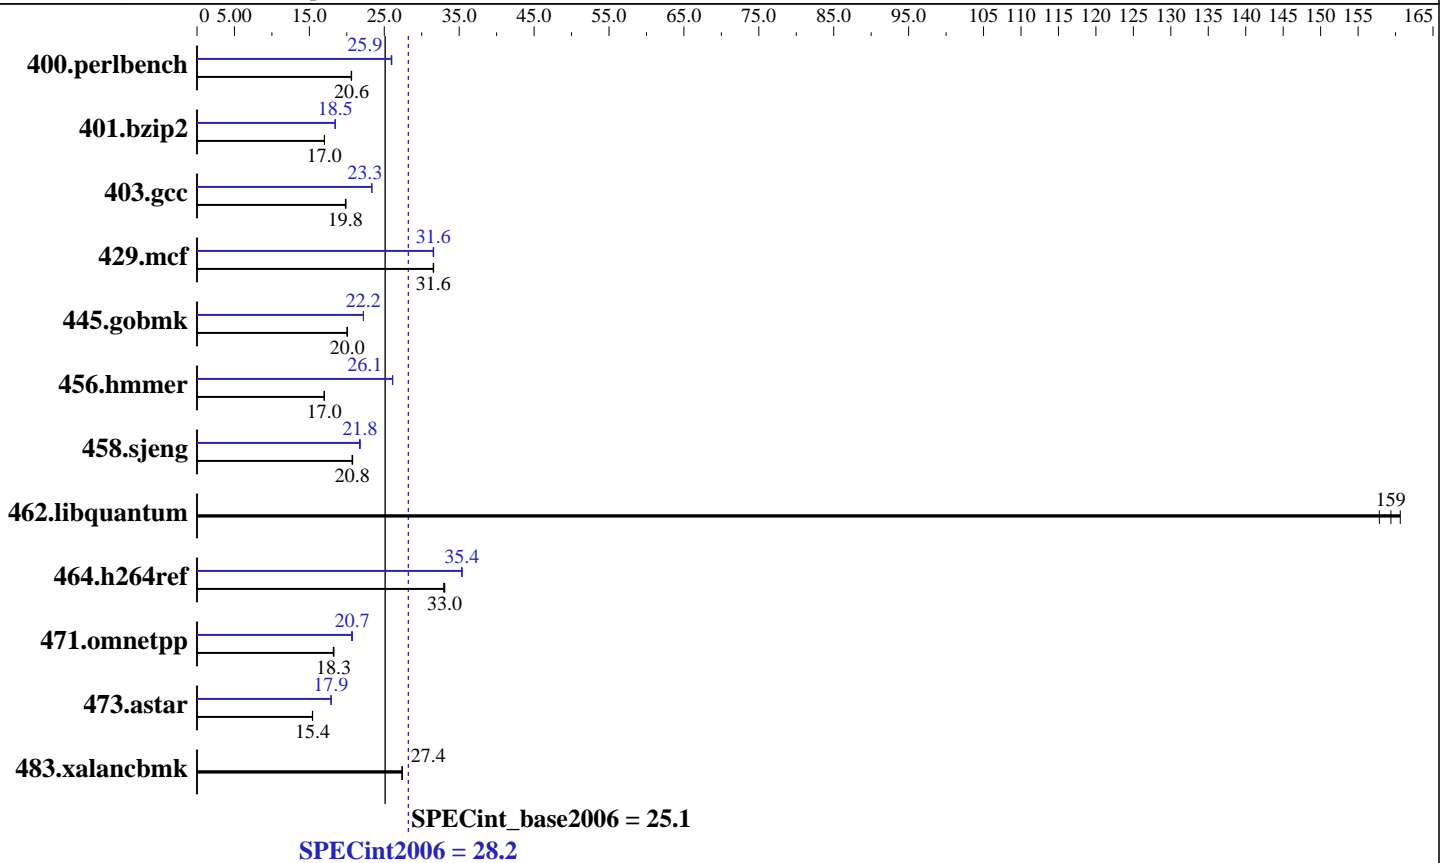

Hardware

CPU Name: Intel Xeon X3370
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4 x 2 GB PC2-6400E ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 28.2

IBM System x3250 M2 (Intel Xeon X3370)

SPECint_base2006 = 25.1

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Jun-2009

Tested by: IBM Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	475	20.6	473	20.6	474	20.6	<u>377</u>	<u>25.9</u>	376	26.0	377	25.9
401.bzip2	567	17.0	567	17.0	567	17.0	<u>523</u>	<u>18.5</u>	523	18.5	524	18.4
403.gcc	405	19.9	406	19.8	406	19.8	345	23.3	345	23.3	345	23.3
429.mcf	289	31.6	289	31.5	289	31.6	289	31.5	289	31.6	289	31.6
445.gobmk	523	20.0	523	20.0	523	20.1	472	22.2	472	22.2	472	22.2
456.hammer	549	17.0	549	17.0	549	17.0	357	26.1	357	26.1	358	26.1
458.sjeng	582	20.8	583	20.8	584	20.7	558	21.7	555	21.8	556	21.8
462.libquantum	131	158	130	159	129	161	131	158	130	159	129	161
464.h264ref	669	33.1	672	32.9	670	33.0	626	35.3	626	35.4	625	35.4
471.omnetpp	342	18.3	342	18.3	343	18.2	301	20.7	302	20.7	303	20.6
473.astar	456	15.4	455	15.4	455	15.4	392	17.9	392	17.9	392	17.9
483.xalancbmk	252	27.4	252	27.4	252	27.4	252	27.4	252	27.4	252	27.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 28.2

IBM System x3250 M2 (Intel Xeon X3370)

SPECint_base2006 = 25.1

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Jun-2009

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 28.2

IBM System x3250 M2 (Intel Xeon X3370)

SPECint_base2006 = 25.1

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Jun-2009

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 28.2

IBM System x3250 M2 (Intel Xeon X3370)

SPECint_base2006 = 25.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Sep 23 18:25:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.