



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2009

Hardware Availability: Sep-2009

Software Availability: Jul-2009

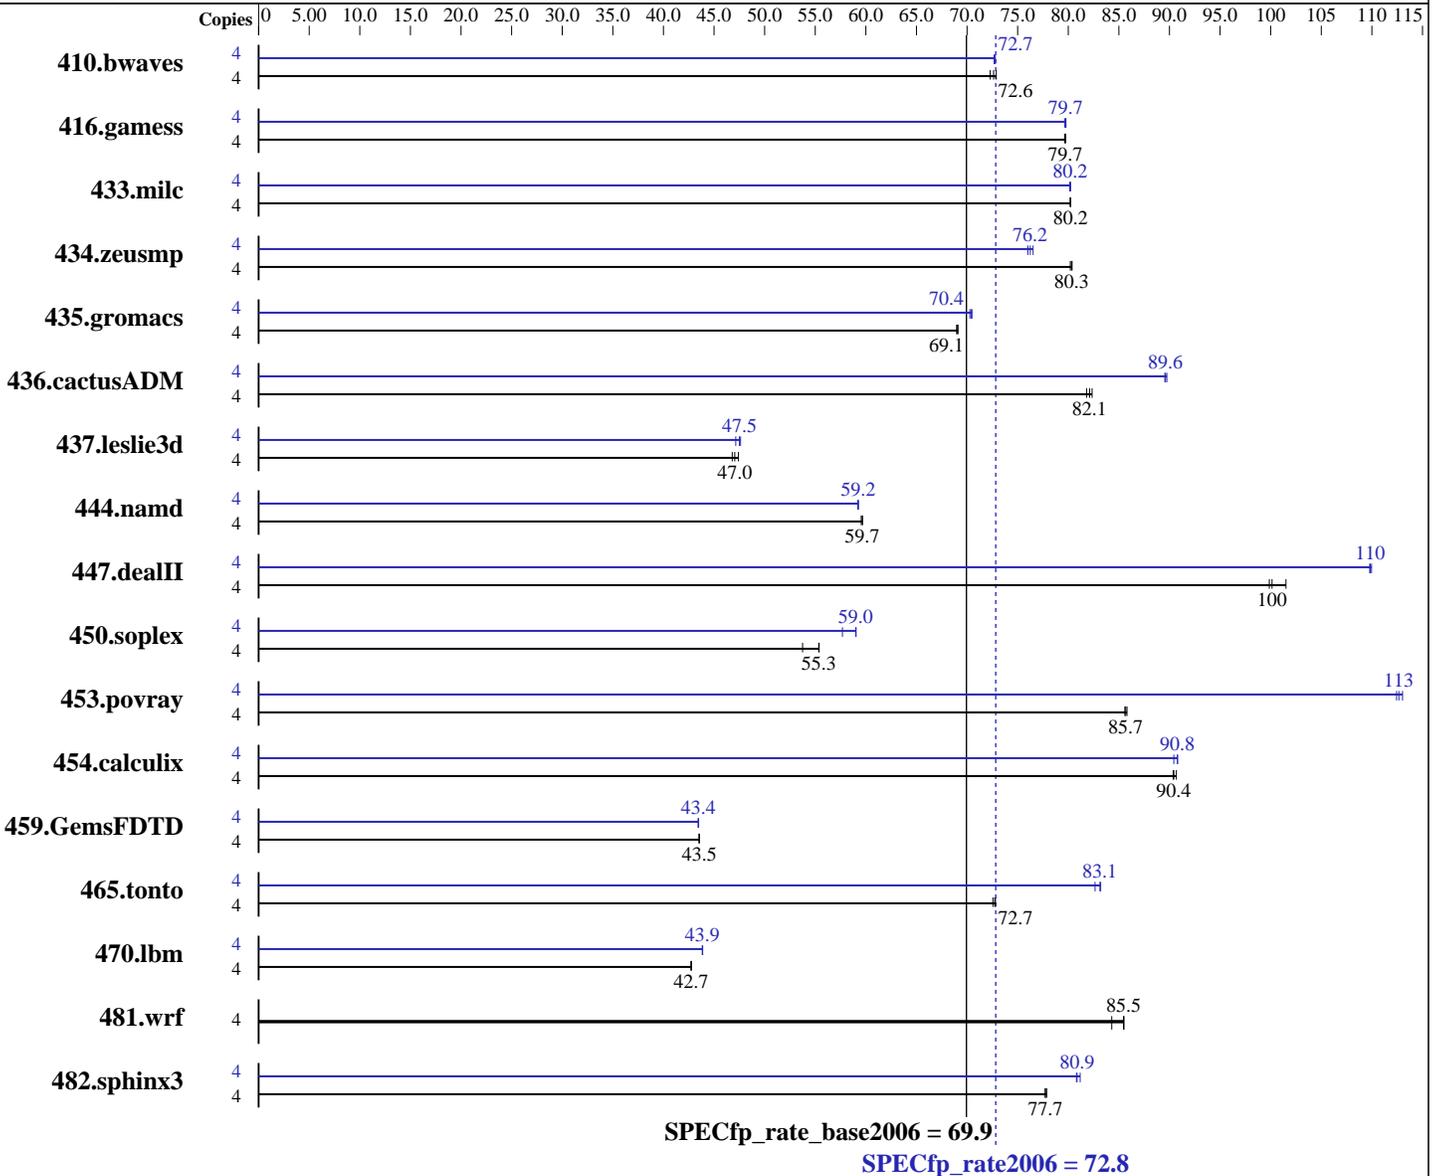

### Hardware

CPU Name: Intel Xeon X3430  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20090511 Package ID: l\_cproc\_p\_11.1.040, l\_cprof\_p\_11.1.040  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55

Test date: Oct-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)  
Disk Subsystem: 1 x 160 GB 7200 RPM SATA  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	752	72.3	746	72.9	<b>749</b>	<b>72.6</b>	4	748	72.7	<b>748</b>	<b>72.7</b>	747	72.8
416.gamess	4	983	79.6	982	79.7	<b>983</b>	<b>79.7</b>	4	983	79.7	<b>982</b>	<b>79.7</b>	982	79.8
433.milc	4	<b>458</b>	<b>80.2</b>	458	80.2	458	80.2	4	<b>458</b>	<b>80.2</b>	458	80.1	458	80.2
434.zeusmp	4	454	80.2	<b>453</b>	<b>80.3</b>	453	80.4	4	476	76.5	479	76.0	<b>477</b>	<b>76.2</b>
435.gromacs	4	414	69.0	<b>414</b>	<b>69.1</b>	413	69.1	4	405	70.5	<b>406</b>	<b>70.4</b>	406	70.3
436.cactusADM	4	580	82.4	584	81.8	<b>582</b>	<b>82.1</b>	4	533	89.7	<b>533</b>	<b>89.6</b>	534	89.5
437.leslie3d	4	<b>799</b>	<b>47.0</b>	803	46.8	793	47.4	4	798	47.1	790	47.6	<b>792</b>	<b>47.5</b>
444.namd	4	539	59.5	538	59.7	<b>538</b>	<b>59.7</b>	4	<b>542</b>	<b>59.2</b>	542	59.2	541	59.3
447.dealII	4	<b>457</b>	<b>100</b>	451	102	458	99.9	4	416	110	<b>417</b>	<b>110</b>	417	110
450.soplex	4	621	53.8	<b>603</b>	<b>55.3</b>	602	55.4	4	578	57.7	<b>565</b>	<b>59.0</b>	565	59.0
453.povray	4	248	85.8	249	85.6	<b>248</b>	<b>85.7</b>	4	<b>189</b>	<b>113</b>	188	113	189	112
454.calculix	4	364	90.7	<b>365</b>	<b>90.4</b>	365	90.4	4	363	90.8	<b>363</b>	<b>90.8</b>	365	90.4
459.GemsFDTD	4	<b>975</b>	<b>43.5</b>	975	43.5	974	43.6	4	<b>977</b>	<b>43.4</b>	976	43.5	977	43.4
465.tonto	4	<b>541</b>	<b>72.7</b>	543	72.5	541	72.8	4	476	82.6	473	83.2	<b>473</b>	<b>83.1</b>
470.lbm	4	1285	42.8	<b>1286</b>	<b>42.7</b>	1286	42.7	4	1254	43.8	1253	43.9	<b>1253</b>	<b>43.9</b>
481.wrf	4	530	84.3	523	85.5	<b>523</b>	<b>85.5</b>	4	530	84.3	523	85.5	<b>523</b>	<b>85.5</b>
482.sphinx3	4	1003	77.7	<b>1003</b>	<b>77.7</b>	1001	77.9	4	965	80.8	<b>964</b>	<b>80.9</b>	960	81.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2009

Hardware Availability: Sep-2009

Software Availability: Jul-2009

## General Notes

The Dell PowerEdge R210 and the Bull NovaScale R410 F2 models are electronically equivalent. This result was measured on a Dell PowerEdge R210.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55

Test date: Oct-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort -m64

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55

Test date: Oct-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -opt-malloc-options=3 -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 72.8

PowerEdge R210 (Intel Xeon X3430, 2.40 GHz)

SPECfp\_rate\_base2006 = 69.9

CPU2006 license: 55

Test date: Oct-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:59:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.