



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

### SPECint®\_rate2006 = 88.5

NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz)

### SPECint\_rate\_base2006 = 81.0

CPU2006 license: 20


Test date: Oct-2009

Test sponsor: Bull SAS

Hardware Availability: Dec-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

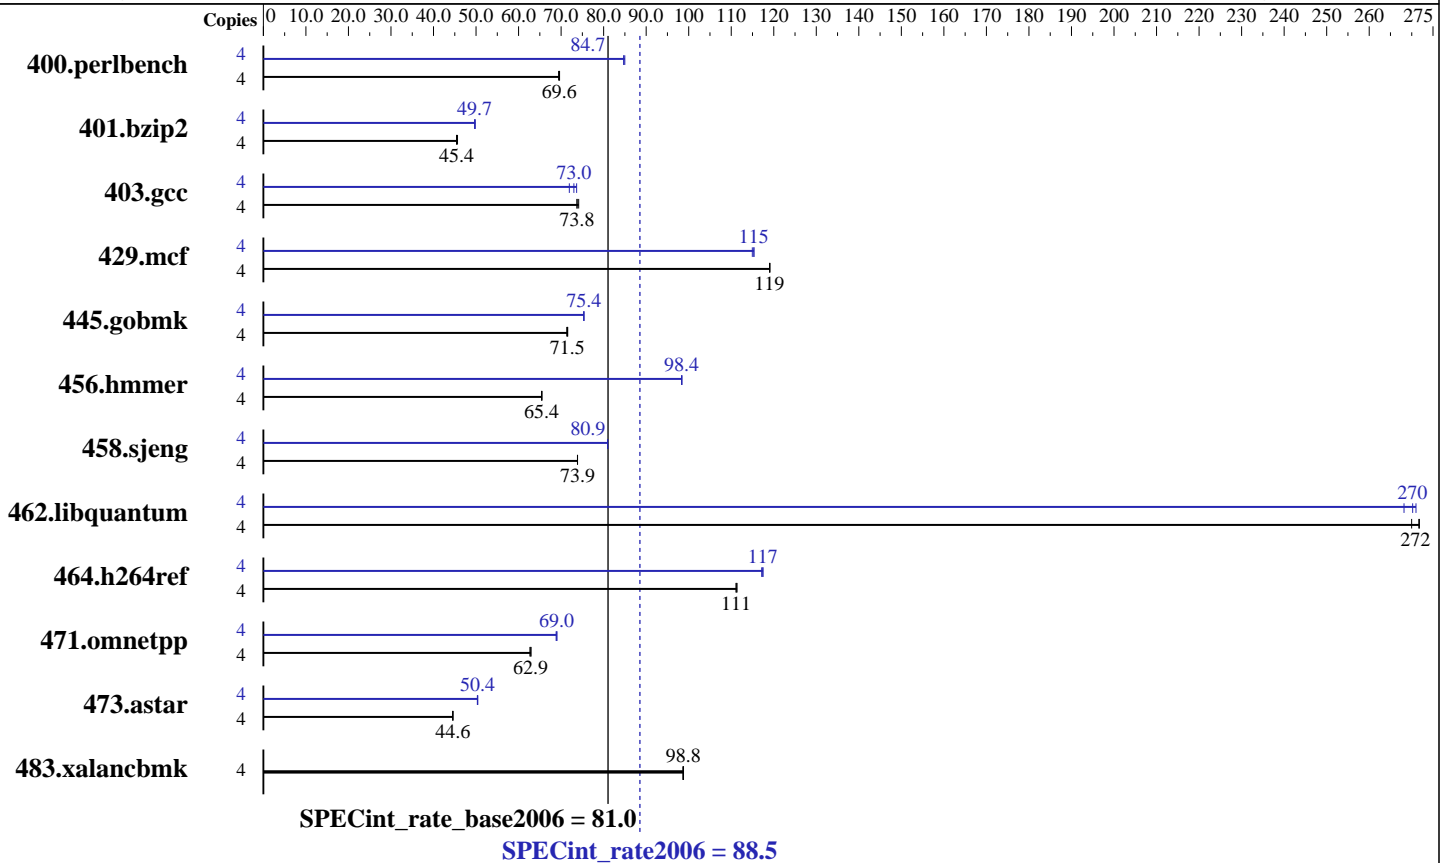

### Hardware

CPU Name: Intel Xeon X3430  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)  
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux Build 20090511 Package ID: I\_cproc\_p\_11.1.040  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 88.5

NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz)

SPECint\_rate\_base2006 = 81.0

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Oct-2009  
Hardware Availability: Dec-2009  
Software Availability: Jul-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	561	69.6	563	69.4	<u>562</u>	<u>69.6</u>	4	461	84.7	460	85.0	<u>461</u>	<u>84.7</u>
401.bzip2	4	846	45.6	850	45.4	<u>850</u>	<u>45.4</u>	4	<u>777</u>	<u>49.7</u>	775	49.8	777	49.7
403.gcc	4	434	74.1	437	73.7	<u>437</u>	<u>73.8</u>	4	437	73.7	448	71.9	<u>441</u>	<u>73.0</u>
429.mcf	4	<u>306</u>	<u>119</u>	306	119	306	119	4	317	115	<u>316</u>	<u>115</u>	316	115
445.gobmk	4	588	71.3	586	71.6	<u>587</u>	<u>71.5</u>	4	<u>557</u>	<u>75.4</u>	557	75.3	557	75.4
456.hammer	4	570	65.4	570	65.5	<u>570</u>	<u>65.4</u>	4	<u>379</u>	<u>98.4</u>	379	98.4	380	98.3
458.sjeng	4	<u>655</u>	<u>73.9</u>	655	73.9	655	73.8	4	<u>598</u>	<u>80.9</u>	598	80.9	598	80.9
462.libquantum	4	<u>305</u>	<u>272</u>	305	272	307	270	4	306	271	309	268	<u>307</u>	<u>270</u>
464.h264ref	4	795	111	797	111	<u>796</u>	<u>111</u>	4	753	117	<u>754</u>	<u>117</u>	756	117
471.omnetpp	4	397	62.9	<u>398</u>	<u>62.9</u>	399	62.7	4	<u>362</u>	<u>69.0</u>	362	69.0	363	68.8
473.astar	4	631	44.5	<u>630</u>	<u>44.6</u>	630	44.6	4	558	50.3	<u>557</u>	<u>50.4</u>	557	50.4
483.xalancbmk	4	279	98.8	280	98.6	<u>279</u>	<u>98.8</u>	4	279	98.8	280	98.6	<u>279</u>	<u>98.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R210 (Intel Xeon X3430, 2.40 GHz) and the Bull NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz) models are electronically equivalent. The results have been measured on a Dell PowerEdge R210 (Intel Xeon X3430, 2.40 GHz) model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 88.5**

NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz)

**SPECint\_rate\_base2006 = 81.0**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Oct-2009  
**Hardware Availability:** Dec-2009  
**Software Availability:** Jul-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 88.5

NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz)

SPECint\_rate\_base2006 = 81.0

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Oct-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
          -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
                -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 88.5**

NovaScale R410 F2 (Intel Xeon X3430, 2.40 GHz)

**SPECint\_rate\_base2006 = 81.0**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Oct-2009

**Hardware Availability:** Dec-2009

**Software Availability:** Jul-2009

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

`-L/spec/cpu2006.1.1/lib -lsmartheap`

473.astar: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`

`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`

`-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32`

`-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64`

483.xalancbmk: `basepeak = yes`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:02:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.