



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint[®]_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Feb-2010

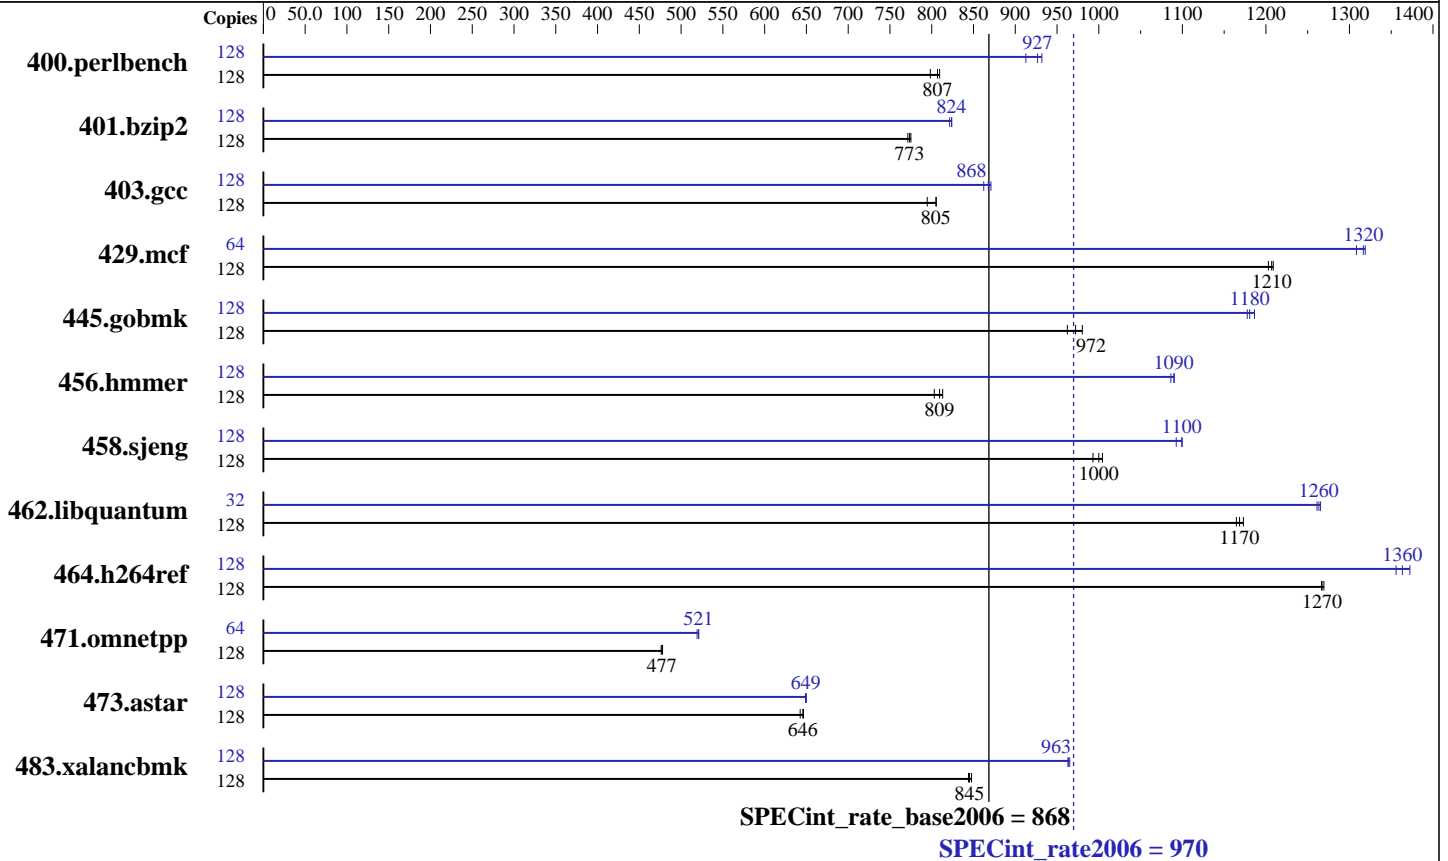

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.30 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 6,8,12,16,18,24,32 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (32 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 8 x 69 GB SAS SSD (IBM provider)
 Other Hardware: None

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 2
 Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Feb-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1545	809	1567	798	<u>1550</u>	<u>807</u>	128	1370	913	1342	932	<u>1350</u>	<u>927</u>
401.bzip2	128	1594	775	1601	771	<u>1597</u>	<u>773</u>	128	1504	821	<u>1499</u>	<u>824</u>	1499	824
403.gcc	128	1297	795	1279	805	<u>1280</u>	<u>805</u>	128	1195	862	1183	871	<u>1187</u>	<u>868</u>
429.mcf	128	<u>967</u>	<u>1210</u>	966	1210	970	1200	64	443	1320	<u>443</u>	<u>1320</u>	446	1310
445.gobmk	128	1370	980	<u>1381</u>	<u>972</u>	1395	962	128	1140	1180	1132	1190	<u>1137</u>	<u>1180</u>
456.hammer	128	<u>1476</u>	<u>809</u>	1487	803	1469	813	128	<u>1096</u>	<u>1090</u>	1099	1090	1095	1090
458.sjeng	128	<u>1549</u>	<u>1000</u>	1560	993	1542	1000	128	1408	1100	<u>1409</u>	<u>1100</u>	1417	1090
462.libquantum	128	<u>2270</u>	<u>1170</u>	2261	1170	2277	1160	32	<u>525</u>	<u>1260</u>	524	1270	526	1260
464.h264ref	128	<u>2235</u>	<u>1270</u>	2231	1270	2236	1270	128	<u>2078</u>	<u>1360</u>	2064	1370	2089	1360
471.omnetpp	128	1680	476	1674	478	<u>1677</u>	<u>477</u>	64	768	521	771	519	<u>768</u>	<u>521</u>
473.astar	128	1390	646	<u>1392</u>	<u>646</u>	1399	643	128	<u>1384</u>	<u>649</u>	1382	650	1385	649
483.xalancbmk	128	1046	844	1042	848	<u>1045</u>	<u>845</u>	128	915	965	<u>917</u>	<u>963</u>	917	963

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

fdpr binary optimization tool used for 400.perlbench
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 401.bzip2
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 403.gcc
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 429.mcf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 456.hammer
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 458.sjeng
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 462.libquantum
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 464.h264ref
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 471.omnetpp
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 473.astar
with options -O4 -vrox -pbsi

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Feb-2010

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
12800 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Feb-2010

Base Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036
C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99
C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:
400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -qalias=noansi -qfdpr -blpdata
-btextpsize:64K
401.bz2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -blpdata
403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata
429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-blpdata
445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata
456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnv01
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20

Test date: Mar-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Bull SAS

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS
-qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr
-blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qalign=natural
-qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr
-qenablevmx -qvecnvml -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qfdpr -qinlglue
-D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100414.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100414.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100414.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100414.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 970

Escala E5-700 (3.0 GHz, 32 core)

SPECint_rate_base2006 = 868

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Feb-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:43:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.