



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®\_rate2006 = 219**

IBM BladeCenter HS22V (Intel Xeon X5677)

**SPECfp\_rate\_base2006 = 212**

CPU2006 license: 11


Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

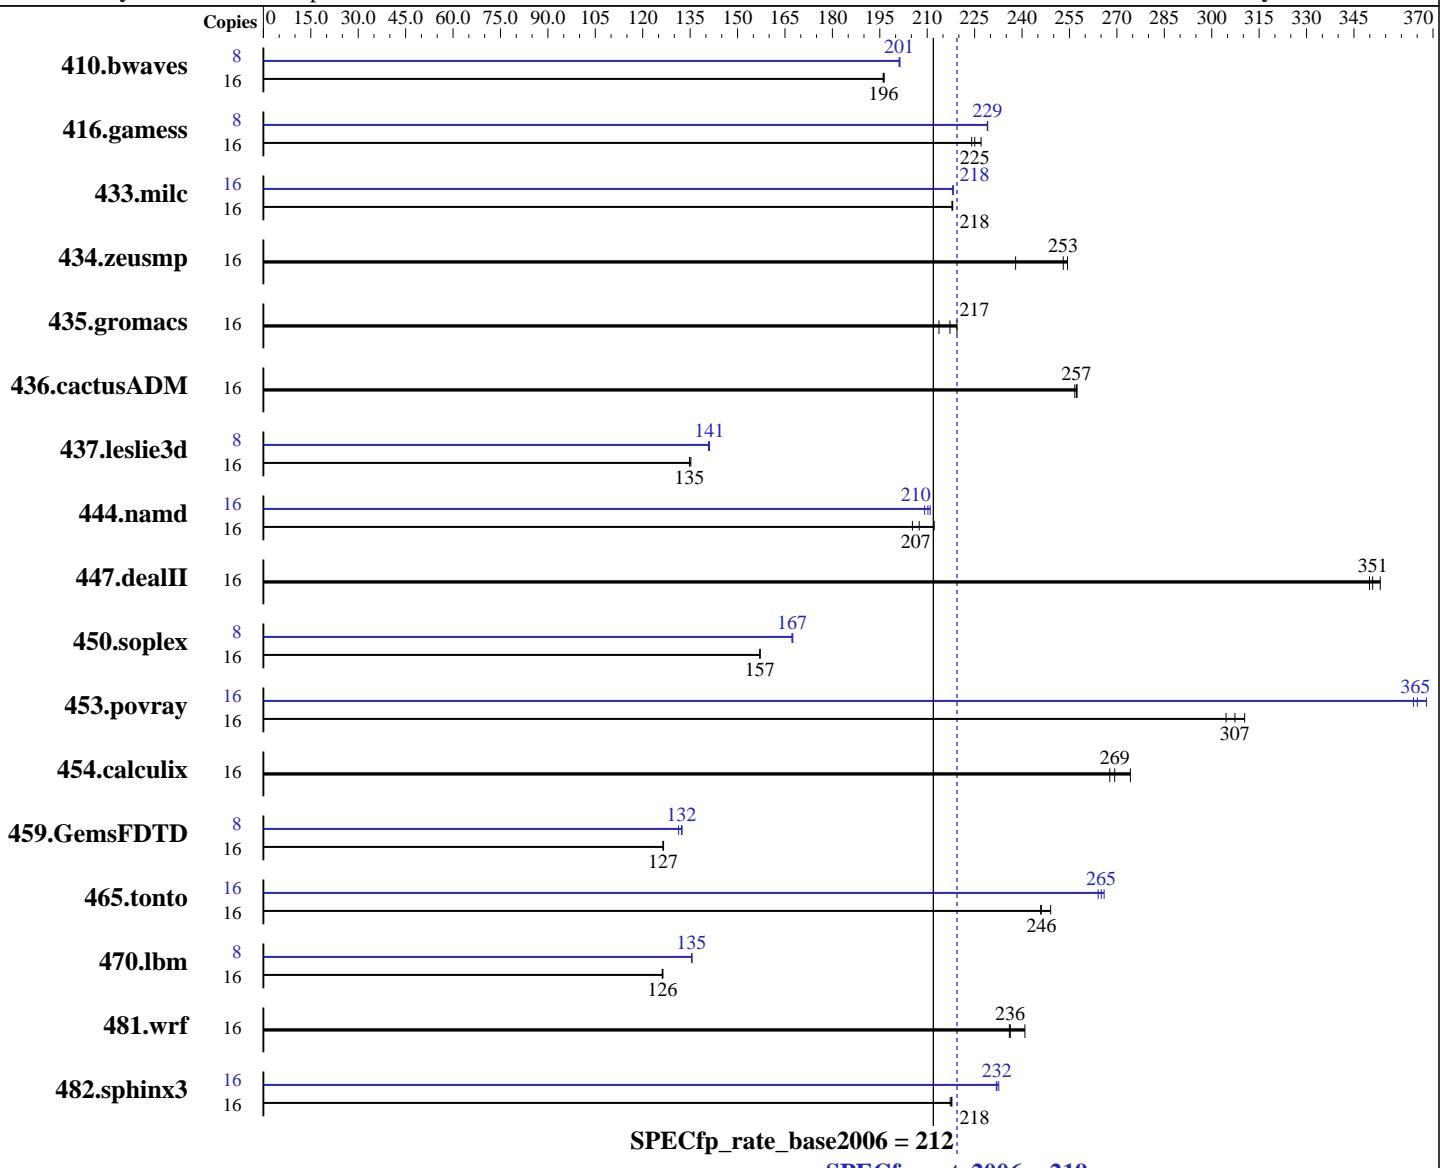

## Hardware

CPU Name: Intel Xeon X5677  
CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
CPU MHz: 3467  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 219**

**IBM BladeCenter HS22V (Intel Xeon X5677)**

**SPECfp\_rate\_base2006 = 212**

**CPU2006 license:** 11

**Test date:** Jul-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)  
 Disk Subsystem: 2 x 50 GB SATA, SSD, RAID 0  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1108</b>	<b>196</b>	1107	196	1109	196	8	<b>541</b>	<b>201</b>	540	201	<b>540</b>	<b>201</b>
416.gamess	16	1380	227	<b>1392</b>	<b>225</b>	1398	224	8	<b>684</b>	<b>229</b>	684	229	<b>684</b>	<b>229</b>
433.milc	16	674	218	674	218	<b>674</b>	<b>218</b>	16	<b>673</b>	<b>218</b>	673	218	674	218
434.zeusmp	16	612	238	572	254	<b>575</b>	<b>253</b>	16	<b>612</b>	<b>238</b>	572	254	<b>575</b>	<b>253</b>
435.gromacs	16	521	219	<b>526</b>	<b>217</b>	535	214	16	<b>521</b>	<b>219</b>	<b>526</b>	<b>217</b>	535	214
436.cactusADM	16	<b>743</b>	<b>257</b>	745	257	743	257	16	<b>743</b>	<b>257</b>	745	257	743	257
437.leslie3d	16	1116	135	<b>1115</b>	<b>135</b>	1112	135	8	<b>534</b>	<b>141</b>	<b>533</b>	<b>141</b>	533	141
444.namd	16	605	212	<b>619</b>	<b>207</b>	625	205	16	608	211	<b>610</b>	<b>210</b>	613	209
447.dealII	16	<b>522</b>	<b>351</b>	518	353	523	350	16	<b>522</b>	<b>351</b>	518	353	<b>523</b>	<b>350</b>
450.soplex	16	849	157	850	157	<b>849</b>	<b>157</b>	8	399	167	<b>399</b>	<b>167</b>	398	167
453.povray	16	274	310	<b>277</b>	<b>307</b>	280	305	16	<b>233</b>	<b>365</b>	234	364	231	368
454.calculix	16	481	274	<b>490</b>	<b>269</b>	493	268	16	481	274	<b>490</b>	<b>269</b>	493	268
459.GemsFDTD	16	1343	126	1341	127	<b>1342</b>	<b>127</b>	8	646	131	<b>642</b>	<b>132</b>	641	132
465.tonto	16	632	249	<b>640</b>	<b>246</b>	640	246	16	592	266	<b>594</b>	<b>265</b>	596	264
470.lbm	16	1739	126	<b>1741</b>	<b>126</b>	1742	126	8	810	136	<b>812</b>	<b>135</b>	812	135
481.wrf	16	757	236	<b>756</b>	<b>236</b>	742	241	16	<b>757</b>	<b>236</b>	<b>756</b>	<b>236</b>	742	241
482.sphinx3	16	<b>1432</b>	<b>218</b>	1432	218	1435	217	16	<b>1340</b>	<b>233</b>	1345	232	<b>1344</b>	<b>232</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Platform Notes

Turbo Mode enabled  
 Turbo Boost set to Traditional  
 Power C-states enabled  
 Demand Scrub disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 219**

IBM BladeCenter HS22V (Intel Xeon X5677)

**SPECfp\_rate\_base2006 = 212**

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
Binaries were compiled on SLES 10 with Binutils 2.18.50.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 219**

IBM BladeCenter HS22V (Intel Xeon X5677)

**SPECfp\_rate\_base2006 = 212**

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 219**

IBM BladeCenter HS22V (Intel Xeon X5677)

**SPECfp\_rate\_base2006 = 212**

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -unroll2 -Ob0
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 219**

IBM BladeCenter HS22V (Intel Xeon X5677)

**SPECfp\_rate\_base2006 = 212**

**CPU2006 license:** 11

**Test date:** Jul-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:49:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 August 2010.