



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M9000

SPECfp[®]_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

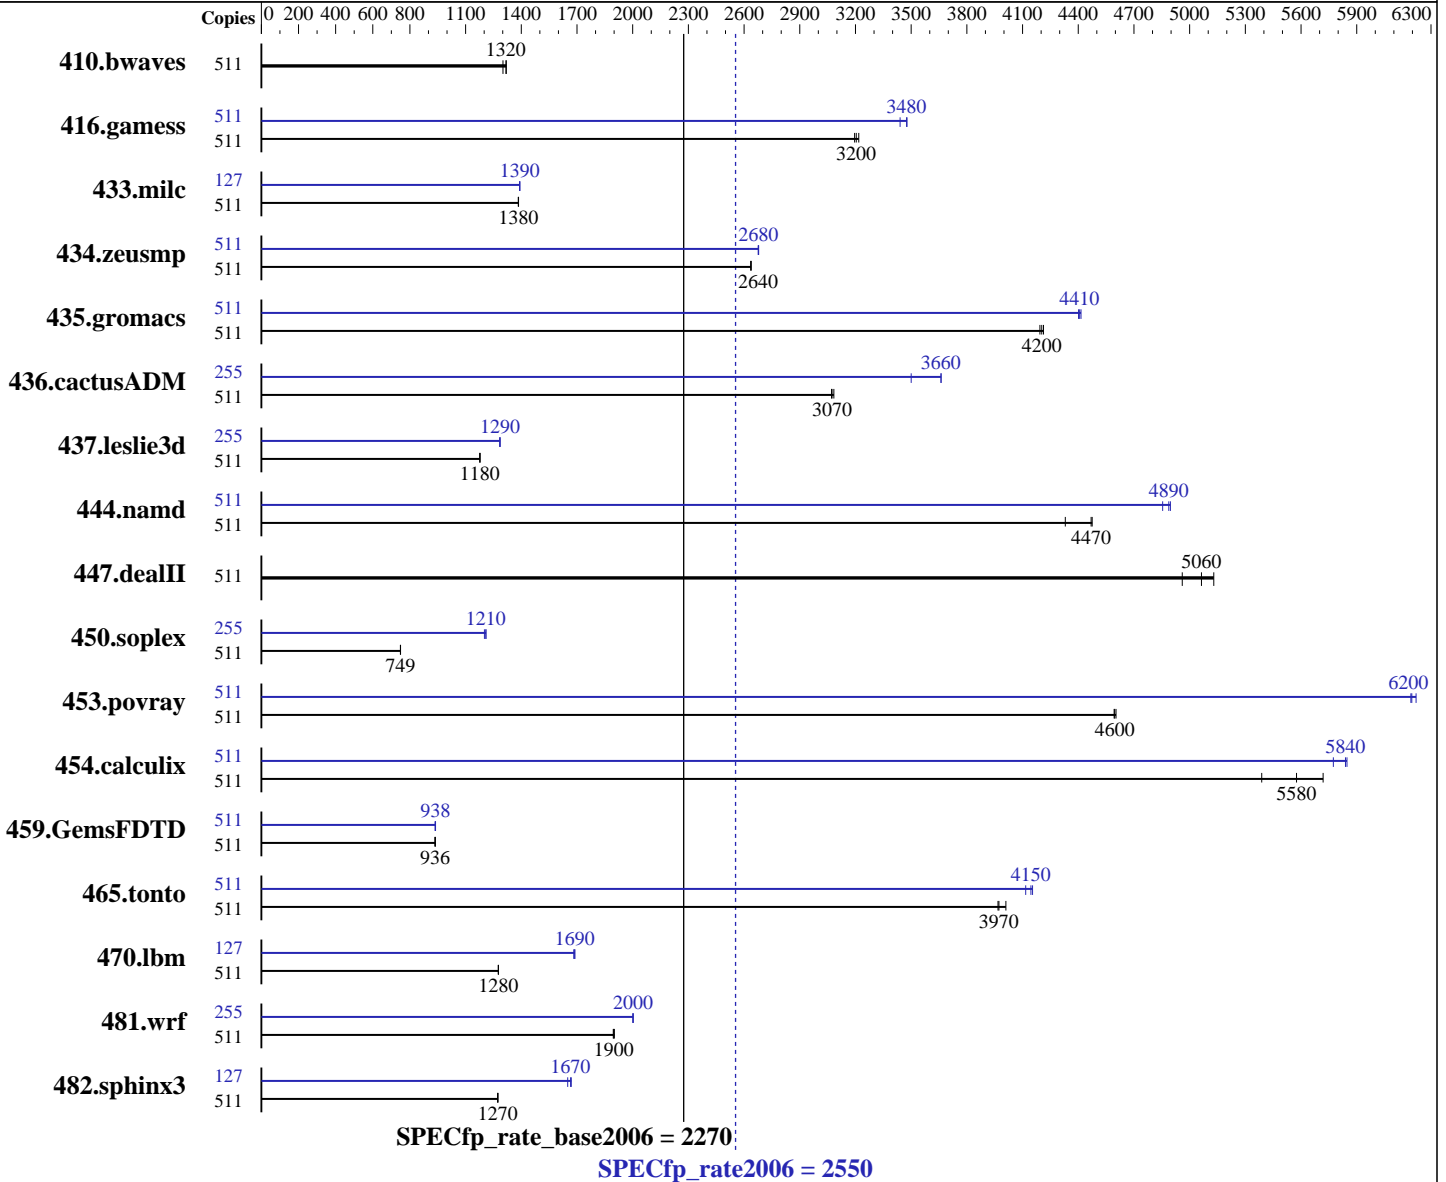

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 256 cores, 64 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 16 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip

Continued on next page

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: No
 File System: zfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 2 TB (512 x 4 GB, 8-way interleaved)
Disk Subsystem: 602 GB on 24 x 73 GB 10K RPM SAS disks, arranged as 8 x 3-way mirrors
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	511	5337	1300	5264	1320	<u>5271</u>	<u>1320</u>	511	5337	1300	5264	1320	<u>5271</u>	<u>1320</u>
416.gamess	511	<u>3123</u>	<u>3200</u>	3109	3220	3131	3200	511	2908	3440	2877	3480	<u>2879</u>	<u>3480</u>
433.milc	511	3387	1390	<u>3388</u>	<u>1380</u>	3390	1380	127	838	1390	<u>838</u>	<u>1390</u>	838	1390
434.zeusmp	511	<u>1763</u>	<u>2640</u>	1763	2640	1764	2640	511	1738	2680	1736	2680	<u>1737</u>	<u>2680</u>
435.gromacs	511	<u>868</u>	<u>4200</u>	870	4190	866	4210	511	826	4410	829	4400	<u>828</u>	<u>4410</u>
436.cactusADM	511	1980	3080	<u>1987</u>	<u>3070</u>	1988	3070	255	832	3660	<u>832</u>	<u>3660</u>	871	3500
437.leslie3d	511	<u>4081</u>	<u>1180</u>	4081	1180	4081	1180	255	<u>1865</u>	<u>1290</u>	1864	1290	1867	1280
444.namd	511	916	4470	946	4330	<u>917</u>	<u>4470</u>	511	837	4900	<u>838</u>	<u>4890</u>	844	4850
447.dealII	511	<u>1154</u>	<u>5060</u>	1140	5130	1179	4960	511	<u>1154</u>	<u>5060</u>	1140	5130	1179	4960
450.soplex	511	5686	750	5691	749	<u>5687</u>	<u>749</u>	255	1770	1200	<u>1759</u>	<u>1210</u>	1758	1210
453.povray	511	592	4590	591	4600	<u>591</u>	<u>4600</u>	511	439	6190	437	6220	<u>439</u>	<u>6200</u>
454.calculix	511	782	5390	737	5720	<u>756</u>	<u>5580</u>	511	721	5850	<u>722</u>	<u>5840</u>	730	5770
459.GemsFDTD	511	<u>5795</u>	<u>936</u>	5785	937	5796	935	511	5780	938	5796	935	<u>5781</u>	<u>938</u>
465.tonto	511	1267	3970	<u>1266</u>	<u>3970</u>	1254	4010	511	1221	4120	1211	4150	<u>1213</u>	<u>4150</u>
470.lbm	511	5499	1280	5501	1280	<u>5500</u>	<u>1280</u>	127	1034	1690	<u>1034</u>	<u>1690</u>	1037	1680
481.wrf	511	3002	1900	<u>3008</u>	<u>1900</u>	3011	1900	255	1423	2000	<u>1423</u>	<u>2000</u>	1423	2000
482.sphinx3	511	<u>7819</u>	<u>1270</u>	7818	1270	7826	1270	127	1483	1670	1500	1650	<u>1486</u>	<u>1670</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08
Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autoup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
lpg_alloc_prefer=1
    Indicates that extra effort should be taken to ensure
    that pages are created in the nearby lgroup (NUMA location).
kernel_cage_enable=0
    Allows the kernel to use memory in any locality group.
    In particular, allows ZFS file caches to be located on
    any memory board.
zfs:zfs_arc_min=0x10000000
zfs:zfs_arc_max=0x10000000000
    Limits the consumption of memory by the zfs file system
    cache to 1 TB. (The arc_max sets the maximum cache
    size; arc_min sets the minimum.)
The "webconsole" service was turned off using
svcadm disable webconsole
The system had 137 GB of swap space.
```

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M9000 server from Oracle. The SPARC Enterprise M9000 server from Oracle and from Fujitsu are electrically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

General Notes

447.dealIII (peak): "apache_stdccxx_4_2_1" src.alt was used.
447.dealIII (base): "apache_stdccxx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=std -xprefetch_auto_type=indirect_array_access -l12amm

C++ benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=compatible -xdepend -library=no%Cstd
-I/export/home/apache/stdccxx-4.2.1/include
-I/export/home/apache/stdccxx-4.2.1/build/include -l12amm
-L/export/home/apache/stdccxx-4.2.1/build/lib
-R/export/home/apache/stdccxx-4.2.1/build/lib -lstd8d

Fortran benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector -l12amm

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M -xlinkopt
-xvector -xalias_level=std -xprefetch_auto_type=indirect_array_access
-l12amm

Base Other Flags

C benchmarks:
-xjobs=32 -V -#

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags (Continued)

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access
-xalias_level=strong -xdepend -ll2amm

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xinline= -xalias_level=strong
-xprefetch_level=2 -lfast -ll2amm

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=any -xdepend -library=stlport4 -fma=fused
-xipo=2 -xchip=generic -xunroll=2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-fma=fused -xipo=2 -xrestrict -xprefetch=no -ll2amm

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -fma=fused -xipo=2
-xlinkopt=2 -xprefetch=no -xunroll=4 -xO4 -lfast

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO3

434.zeusmp: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=1
-ll2amm -xunroll=5

437.leslie3d: -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign
-xprefetch=no

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xprefetch=no -lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xtarget=generic -xinline=
-fsimple=0 -xlinkopt -xvector -xdepend

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xvector -xunroll=8
-xprefetch=latx:3 -xalias_level=std

481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xprefetch=no

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp_rate2006 = 2550

SPECfp_rate_base2006 = 2270

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

481.wrf (continued):
-xcache=generic -l12amm

Peak Other Flags

C benchmarks:
-xjobs=32 -V -#
C++ benchmarks:
-xjobs=32 -verbose=diags,version
Fortran benchmarks:
-xjobs=32 -V -v
Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:40:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.