



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

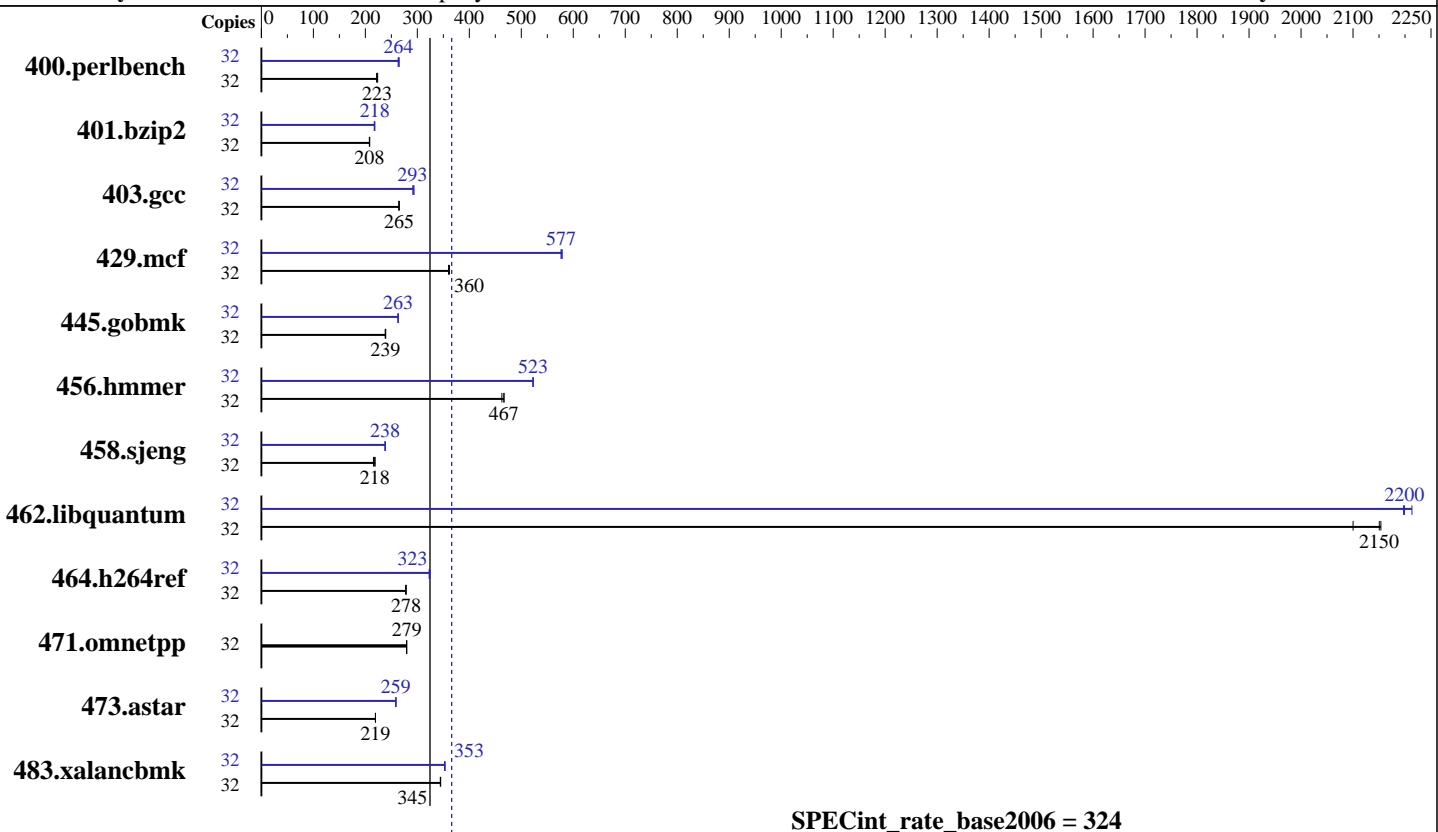

Hardware		Software	
CPU Name:	AMD Opteron 6262 HE	Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
CPU Characteristics:	AMD Turbo CORE technology up to 2.90 GHz	Compiler:	C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
CPU MHz:	1600	Auto Parallel:	No
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	32/64-bit
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores	Other Software:	SmartHeap 10.0 32-bit Library for Linux
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores		
Other Cache:	None		
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)		
Disk Subsystem:	2 x 146 GB 7.2 K SATA		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1398	224	<b><u>1405</u></b>	<b><u>223</u></b>	1410	222	32	<b><u>1184</u></b>	<b><u>264</u></b>	1179	265	1189	263
401.bzip2	32	1486	208	1481	208	<b><u>1486</u></b>	<b><u>208</u></b>	32	1416	218	<b><u>1417</u></b>	<b><u>218</u></b>	1422	217
403.gcc	32	<b><u>973</u></b>	<b><u>265</u></b>	974	264	972	265	32	<b><u>879</u></b>	<b><u>293</u></b>	884	291	878	293
429.mcf	32	806	362	<b><u>810</u></b>	<b><u>360</u></b>	811	360	32	<b><u>506</u></b>	<b><u>577</u></b>	504	579	506	577
445.gobmk	32	1409	238	1403	239	<b><u>1406</u></b>	<b><u>239</u></b>	32	<b><u>1276</u></b>	<b><u>263</u></b>	1276	263	1277	263
456.hmmer	32	645	463	640	467	<b><u>640</u></b>	<b><u>467</u></b>	32	<b><u>571</u></b>	<b><u>523</u></b>	571	522	571	523
458.sjeng	32	<b><u>1777</u></b>	<b><u>218</u></b>	1796	216	1770	219	32	1628	238	<b><u>1625</u></b>	<b><u>238</u></b>	1625	238
462.libquantum	32	308	2150	<b><u>308</u></b>	<b><u>2150</u></b>	316	2100	32	300	2210	<b><u>302</u></b>	<b><u>2200</u></b>	302	2200
464.h264ref	32	2552	277	2543	278	<b><u>2544</u></b>	<b><u>278</u></b>	32	<b><u>2192</u></b>	<b><u>323</u></b>	2184	324	2193	323
471.omnetpp	32	716	279	715	280	<b><u>716</u></b>	<b><u>279</u></b>	32	716	279	715	280	<b><u>716</u></b>	<b><u>279</u></b>
473.astar	32	<b><u>1024</u></b>	<b><u>219</u></b>	1024	219	1024	219	32	868	259	868	259	<b><u>868</u></b>	<b><u>259</u></b>
483.xalancbmk	32	640	345	<b><u>641</u></b>	<b><u>345</u></b>	642	344	32	625	353	<b><u>625</u></b>	<b><u>353</u></b>	626	352

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled"  
Set "kernel/randomize\_va\_space=0" in /etc/sysctl.conf

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
Set "nodev /mnt/hugepages hugetlbfs defaults 0 0" in /etc/fstab

## Platform Notes

BIOS configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

CPU2006 license: 3

Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
  -IPA:plimit=20000 -OPT:unroll_times_max=8
  -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
  -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
  -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
  -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
  -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
  -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
  -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
  -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
  -INLINE:aggressive=on -CG:gcm=off
  -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
  -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
  -IPA:min_hotness=300 -IPA:pu_reorder=1
  -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmr: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
  -OPT:alias=disjoint -OPT:unroll_times_max=16
  -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
  -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
  -HP:bdt=2m:heap=2m
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
           -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
           -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
           -WOPT:sib=on
```

```
462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
                -OPT:unroll_times_max=16 -LNO:prefetch=2
                -LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
                -INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
                -HP:bdt=2m:heap=2m,limit=300
```

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
              -OPT:unroll_times_max=2 -IPA:plimit=20000
              -OPT:alias=disjoint -CG:ptr_load_use=0
              -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
            -GRA:optimize_boundary=on -OPT:alias=disjoint
            -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
            -m32 -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
                 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
                 -INLINE:aggressive=on -m32 -CG:cmp_peep=on
                 -CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
                 -fno-emit-exceptions
                 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>  
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>  
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G7  
(1.6 GHz AMD Opteron 6262 HE)

**SPECint\_rate2006 = 366**

**SPECint\_rate\_base2006 = 324**

**CPU2006 license:** 3

**Test date:** Oct-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:59:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2011.